



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW Filter 872.5 MHz SMD 3.0×3.0 mm

TST Parts No.:TA0976A

Customer Parts No.:_____

Company:_____
Division:_____
Approved by :_____
Date:_____

Checked by:_____ David Chang 張閔智

Approval by:_____ Francis Chen 陳啟

Date:_____ 2009/02/02



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 872.5 MHz

MODEL NO.: TA0976A

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 10 dB_m
2. DC voltage: 3 V
3. Operating Temperature: -30°C to 85°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. CHARACTERISTICS:



Item			Unit	Min.	Typ.	Max.
Center frequency		F _c	MHz	-	872.5	-
Insertion loss	865 ~ 880 MHz	IL	dB	-	2.7	3.5
Amplitude ripple	865 ~ 880 MHz		dB	-	0.7	1.5
VSWR	865 ~ 880 MHz		-	-	1.5	2.0
Attenuation (reference from 0dB)						
10 ~ 820	MHz		dB	40	45	-
820 ~ 835	MHz		dB	35	40	-
912 ~ 927	MHz		dB	25	32	-
927 ~ 972	MHz		dB	35	40	-
972 ~ 1300	MHz		dB	40	45	-
Source impedance		Z _S	Ω	-	50	-
Load impedance		Z _L	Ω	-	50	-

Note1. No matching network required for operation at 50Ω


C. MEASUREMENT CIRCUIT:

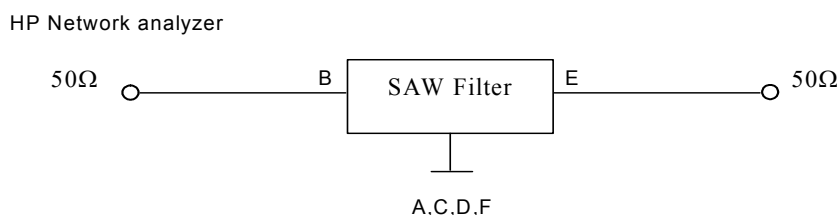

D. Transfer Function :

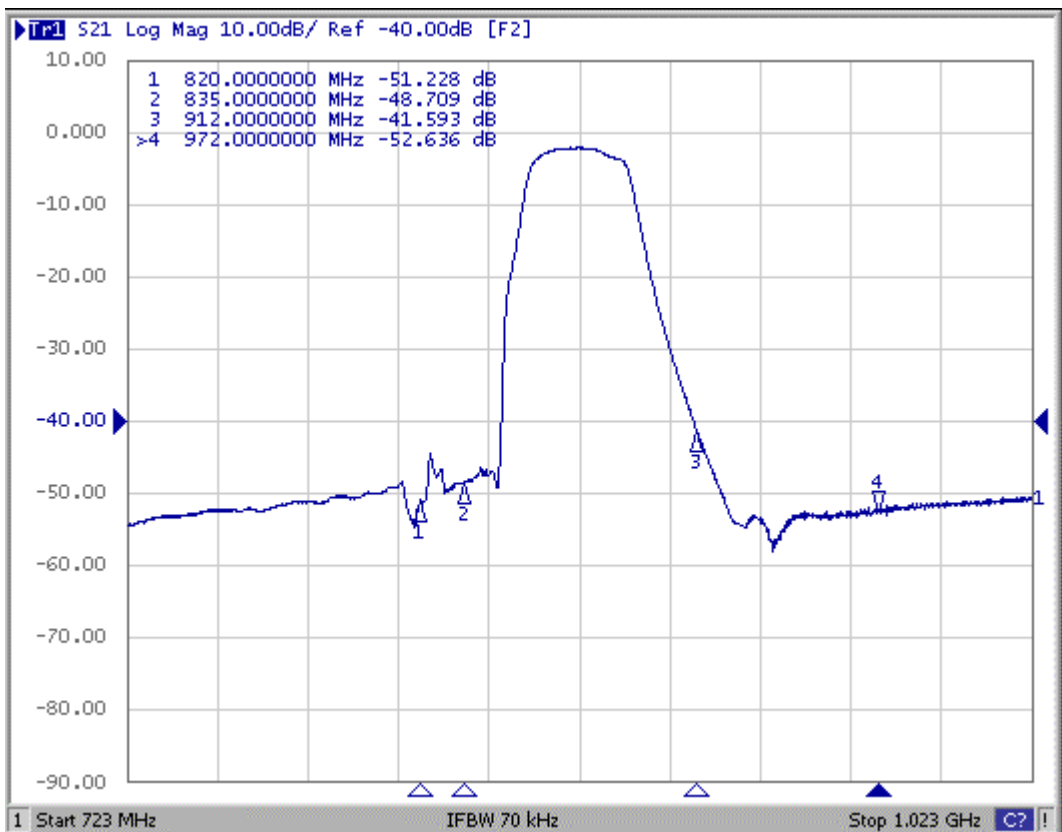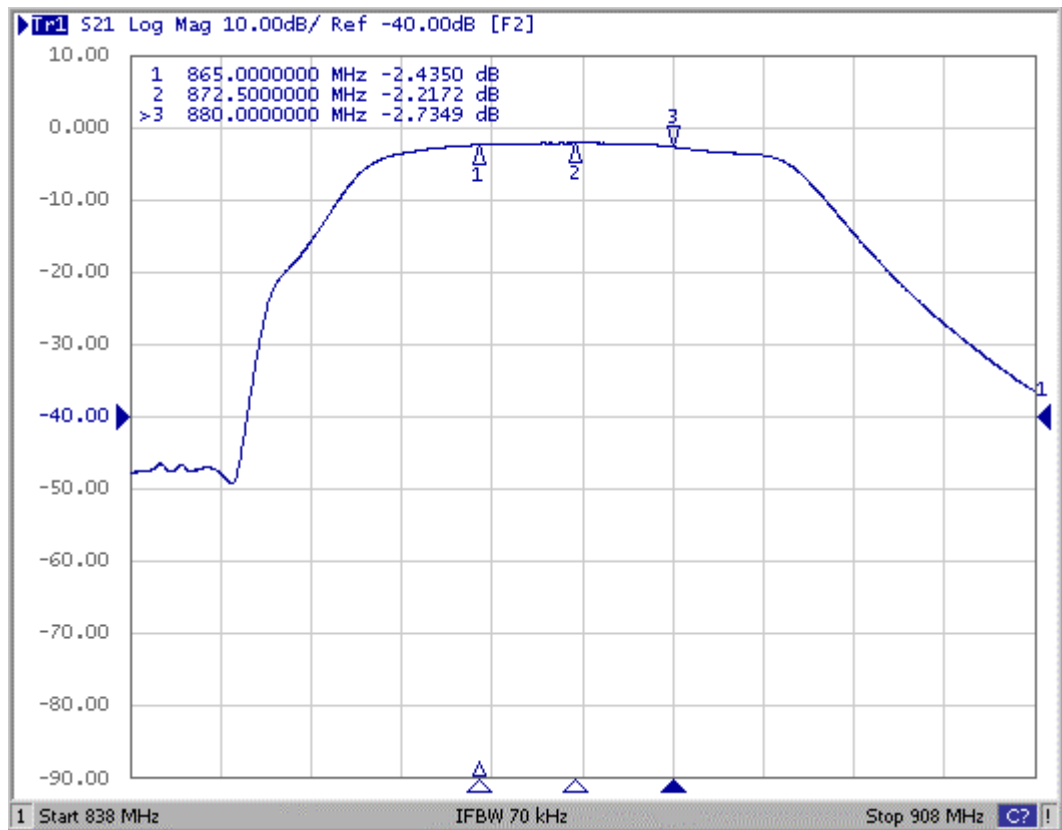


E.OUTLINE DRAWING:

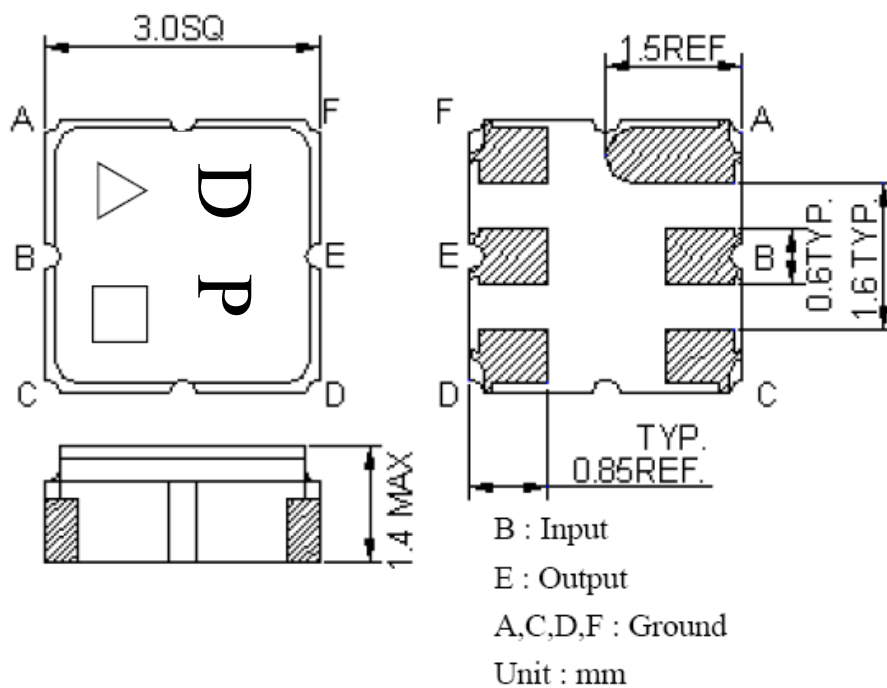

△ : Year Code (2006->6, ..., 2009->9)


□ : Date Code (W01->A,W02->B,...W27->a,...,W52->z)

F.PCB FOOTPRINT:

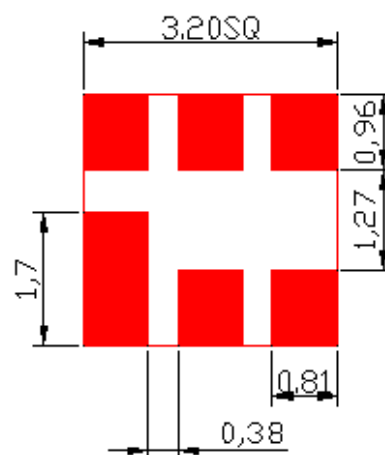


G. PACKING:

1. REEL DIMENSION

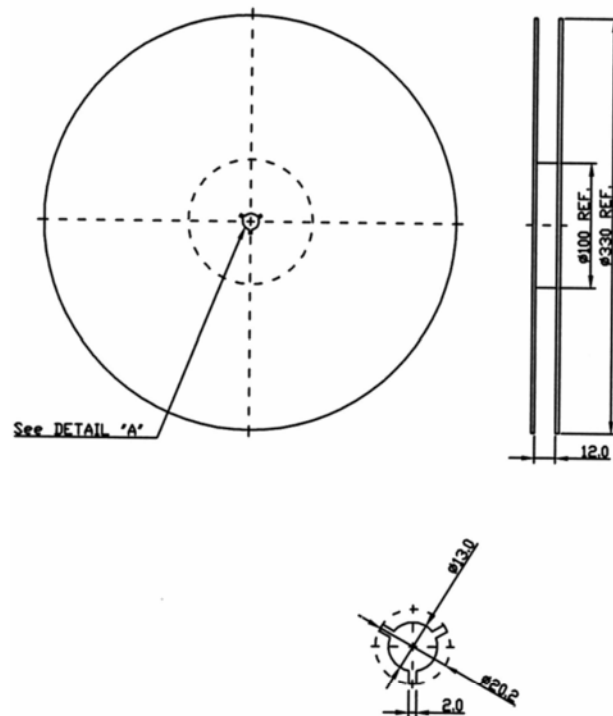

2. TAPE DIMENSION

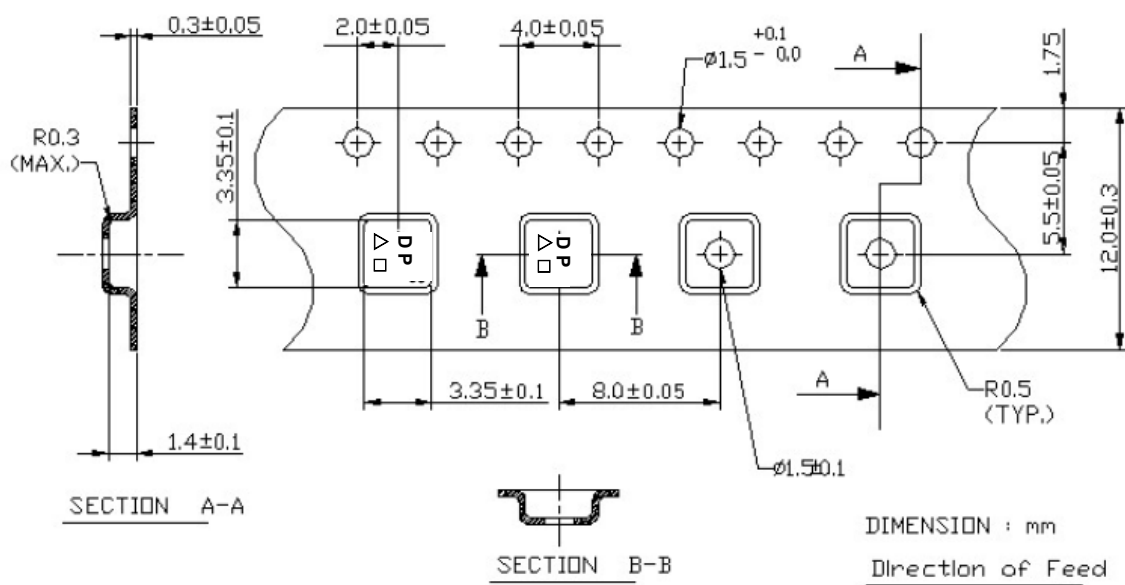

H. RECOMMENDED REFLOW PROFILE :

