


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

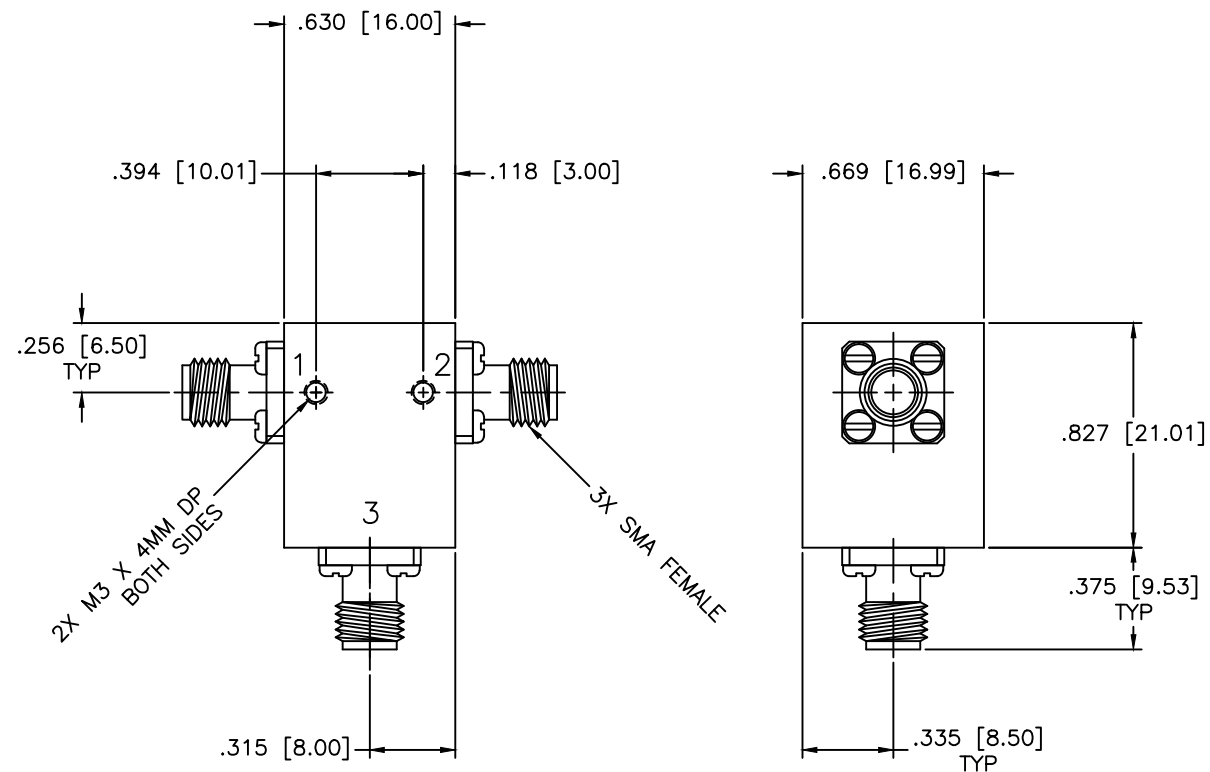

SPECIFICATIONS

Frequency Range: 8–16 GHz

Isolation: 17dB Min.

Insertion loss: 0.60dB Max.

VSWR: 1.35:1 Max.

Operating Temperature: –54°C to +85°C

Power: 25W Avg, 250W Peak.

MATERIAL:		MCLI		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: CIRCULATOR		SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 05-18-2010		PART NO. CS-28-25			
APPROVED: T. Nguyen		DATE: 05-18-2010		CAGE CODE: 0D2L5		DWG NO. 84817	
		THIRD ANGLE PROJECTION		SIZE: A		REV: N/A	
				DO NOT SCALE THE DRAWING			