


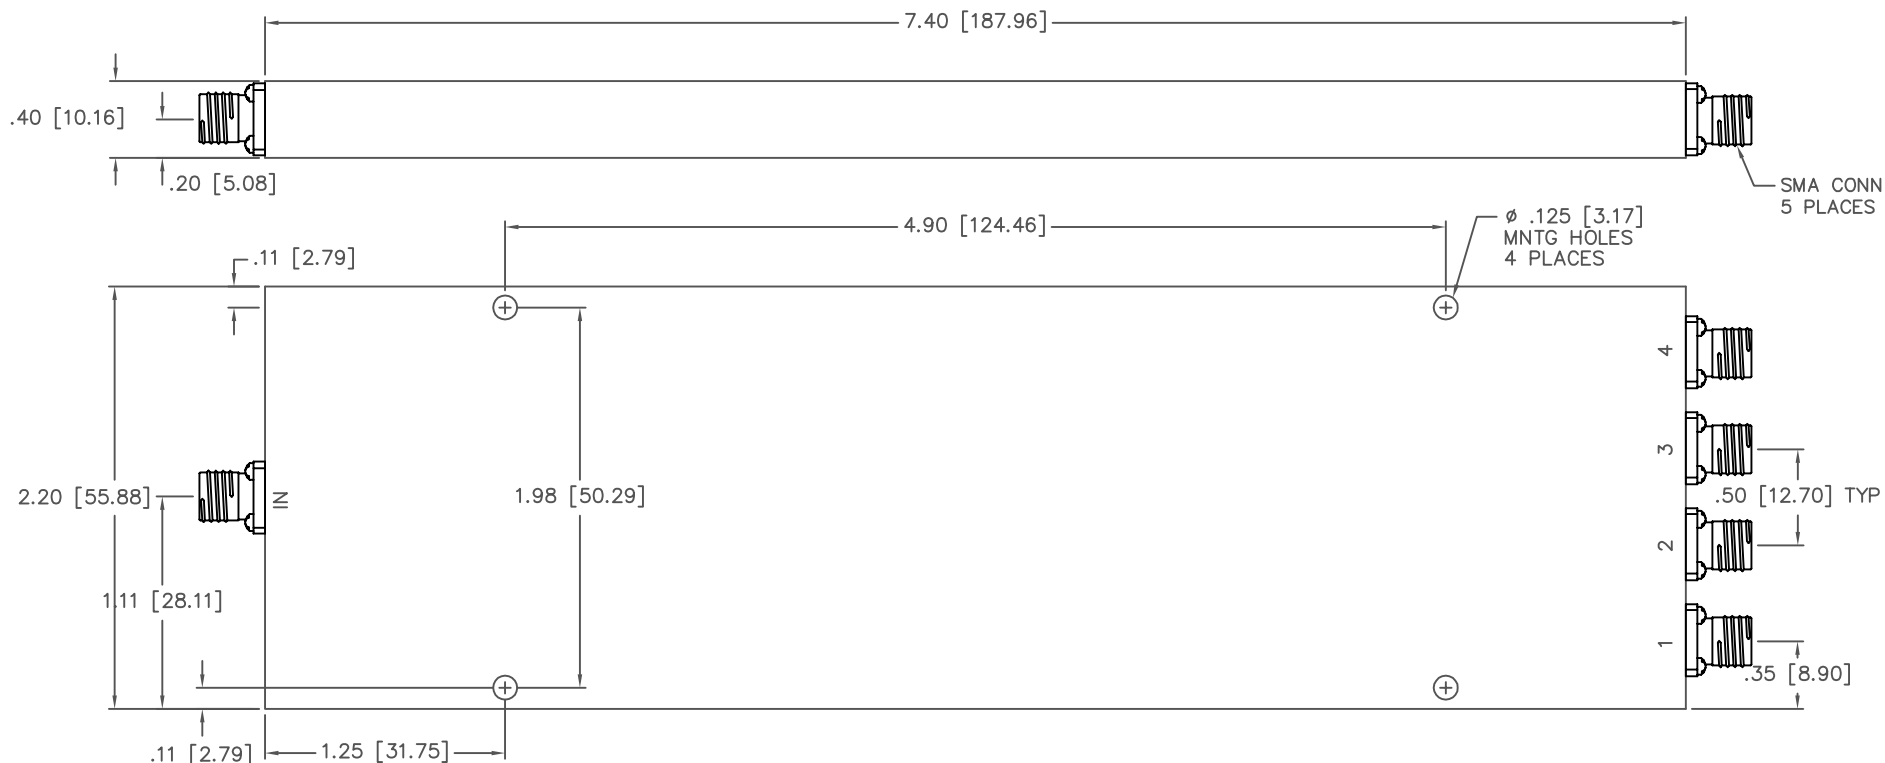

Electrical: Specifications:

Frequency Range:	1.0 - 27.0	GHz
Insertion Loss:	4.5	dB Max
Amplitude Balance:	0.8	dB Max
Isolation:	15	dB Min
Phase Balance:	12.0	deg. Max
VSWR Input:	2.00: 1	Max
VSWR Output:	1.80: 1	Max
Power dividing at input:	30	watts Max

SigaTek

423 Black Oak Ridge Rd.
Wayne, NJ 07470
Ph: 973-706-8475, Fax: 973-832-4435
www.sigatek.com

SP57407

4-way SMA Power Divider

Dimensions are in inches and (mm)
 Decimal Tolerance:
 2 place ± 0.020
 3 place ± 0.010

CAGE CODE : 69UC1

SCALE:N/A

REV
N/A

Notes: All dimensions are typical unless they are specified.
Specifications are subject to change at any time without any notice.
Copy or distribution of this drawing is prohibited.