


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

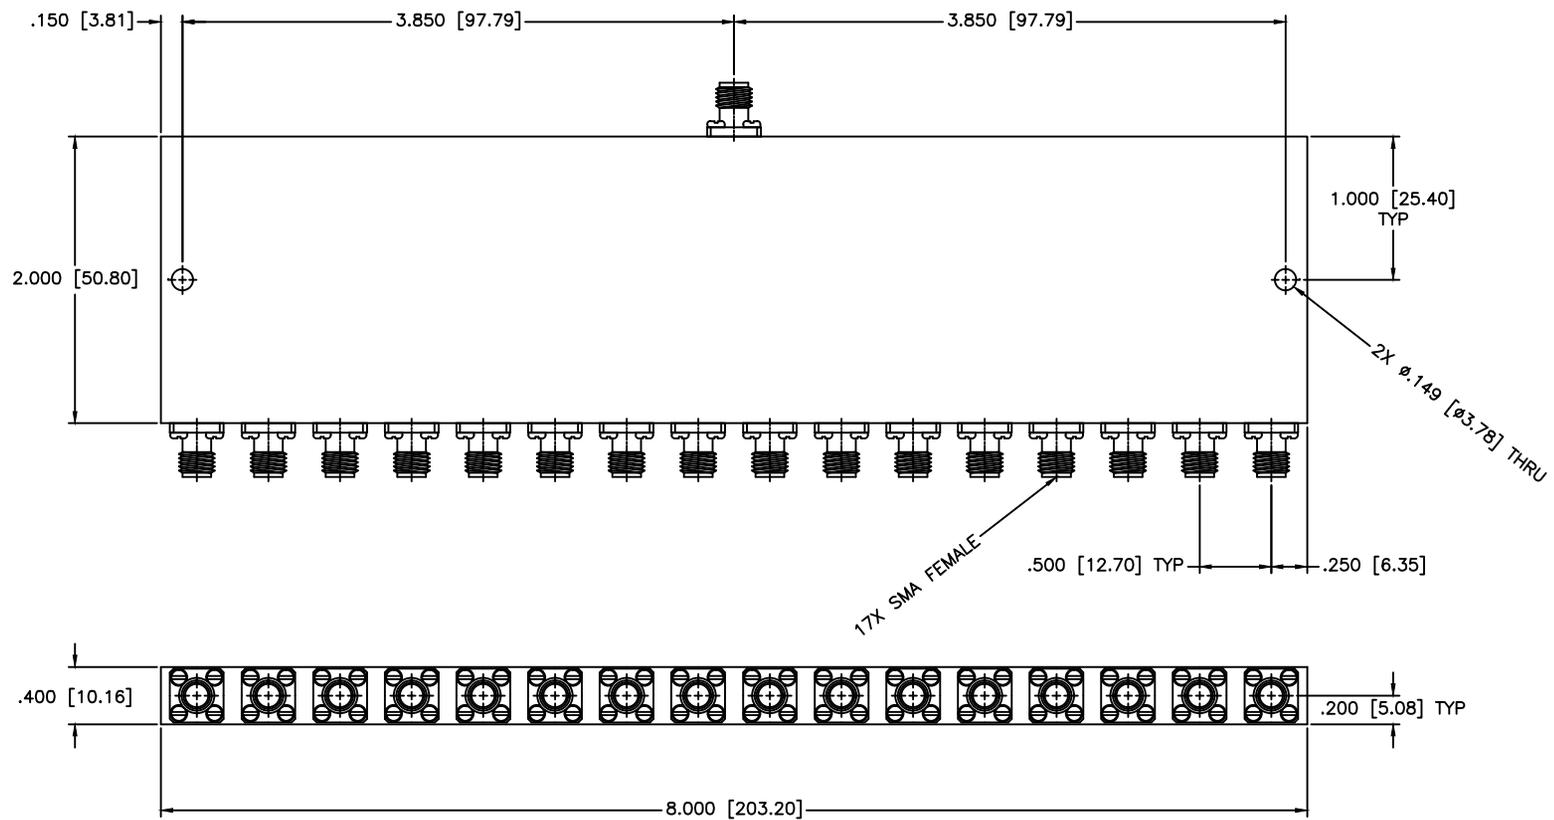

**SPECIFICATIONS**

- Frequency Range: 3.0–3.5 GHz
- VSWR: 1.65:1 Max.
- Amplitude Balance:  $\pm 1.0$ dB Max.
- Phase Balance:  $\pm 5$ Deg. Max.
- Insertion Loss: 2.9dB Max.
- Isolation: 16dB Min.
- Input Power: 30W (Load vswr @ 1.2)

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: <b>16-WAY POWER DIVIDER</b>	
DRAWN: Paiboon Luekhamhan DATE: 03-25-2008		PART NO.: <b>PS16-29</b>	
APPROVED: T. Nguyen DATE: 03-25-2008		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO.: 82802
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	

