

D

C

B

A

D

C

B

A


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

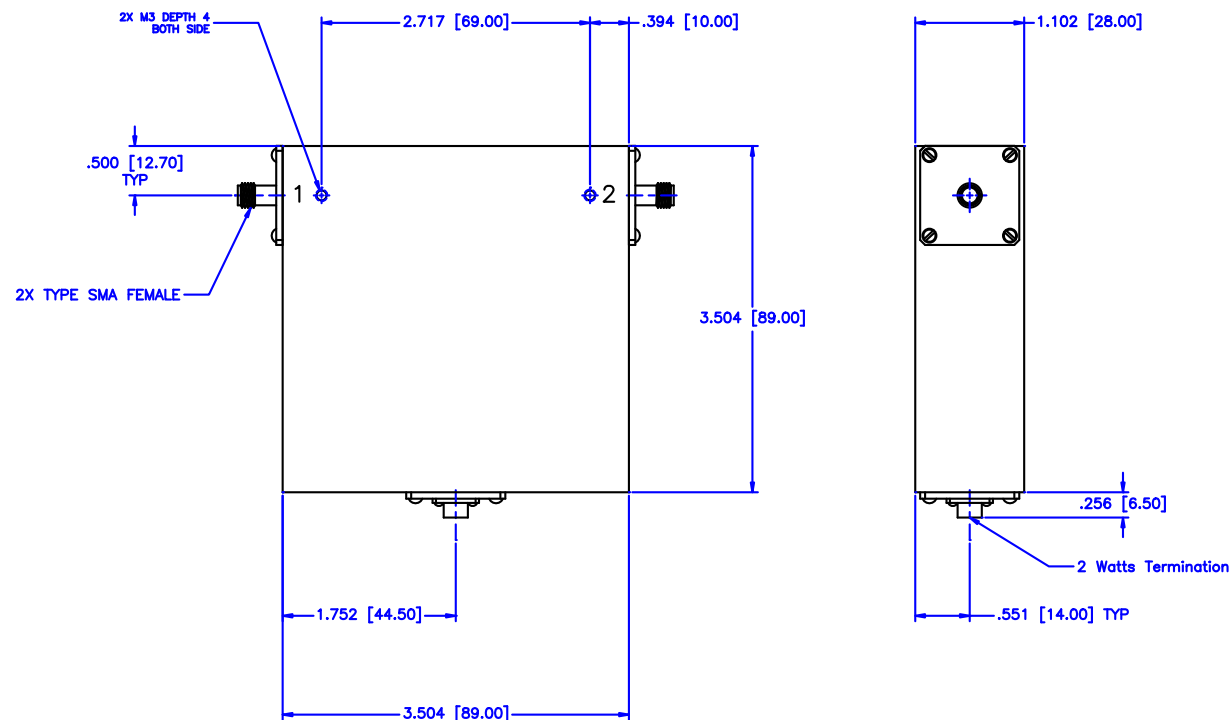

SPECIFICATIONS:

FREQUENCY RANGE	+10° TO +40°C			POWER RATING	
	ISOLATION (dB Min.)	INSERTION LOSS (dB Max.)	V.S.W.R. (Max.)	PEAK POWER (W)	AVERAGE POWER (W)
0.80-2.2 (GHz)	12 (dB Min.)	0.9 (dB Max.)	1.70 (Max.)	100 (W)	2 (W)

MATERIAL:

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
<http://WWW.MCLI.COM>

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR (mm) (MILLIMETERS)
FRACTIONS: $\pm 1/64$
DECIMALS: $\pm 0.01 \pm 0.005$
ANGLE: $\pm 1/2^\circ$

DRAWING TITLE:

COAXIAL ISOLATOR

PART NO.

IS-70

DRAWN:

Paiboon Luekhamhan

DATE:

10-25-2007

APPROVED:

T. Nguyen

DATE:

10-25-2007

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)



CAGE CODE:

0D2L5

SIZE:

C

REV:

N/A

DWG NO.

82958

DO NOT SCALE THE DRAWING

4

3

2

1