



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1560 MHz Ceramic Bandpass Filter

Part Number: AM1560B1020



Electrical specifications

Center Frequency: 1560 MHz

Bandwidth: 120 MHz

VSWR: 2.0 dB max

Input / Output Impedance: 50 Ohms

Passband: 1500-1620 MHz

Passband Insertion Loss: 1.5dB max

Passband Ripple: 0.5 dB max

Rejection: 20 dB min at 1160-1300 MHz

Power Handling: 1 W

Mechanical

Mounting Method: SMT

Dimensions: 10mm x 10mm x 4mm


Environmental

Operating Temperature: -30°C to +70°C

Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

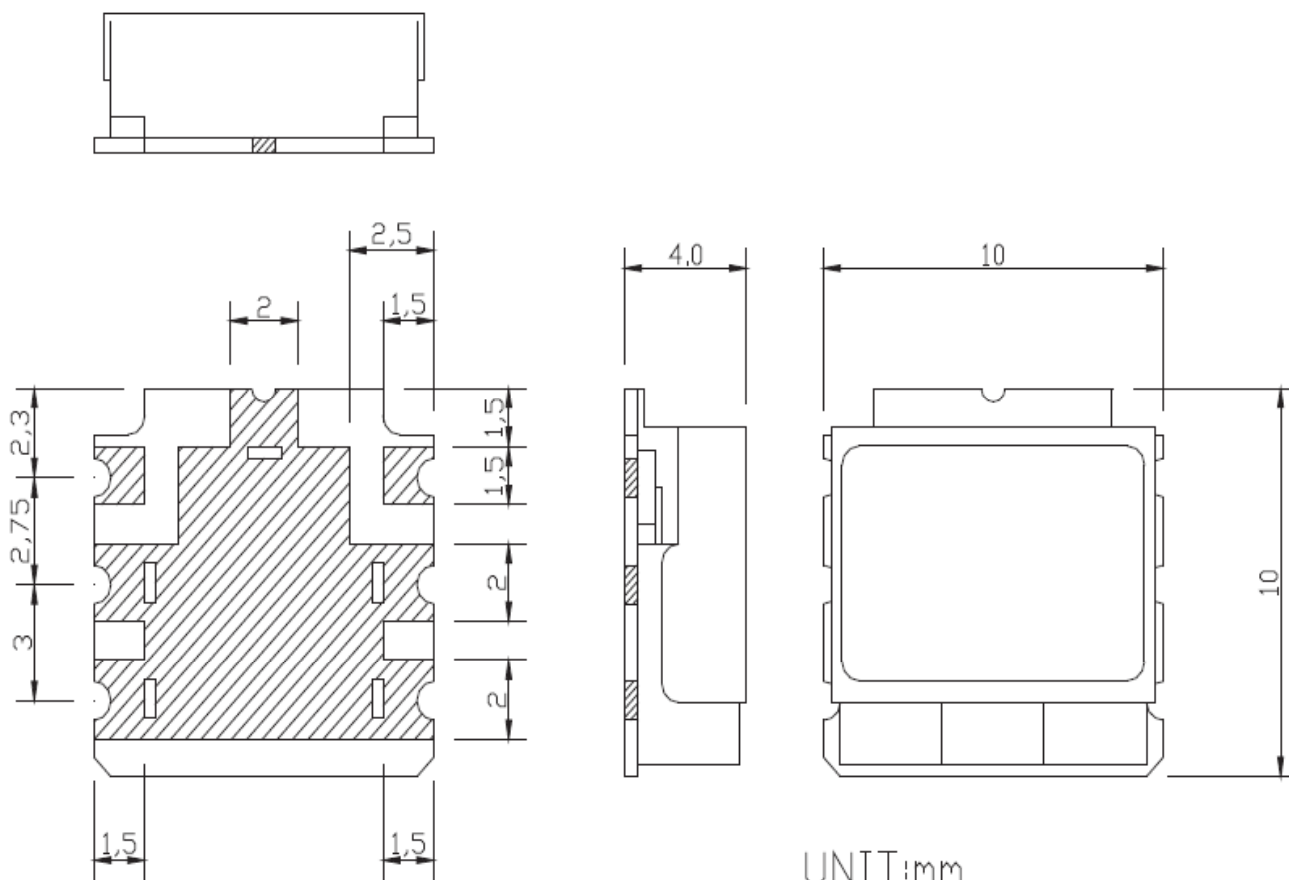

UNIT:mm

TOLERANCE:±0.3