

# PAGINAR

# 0.5 Watt RF Load Up To 18 GHz With SMA Female Input Passivated Stainless Steel

## TECHNICAL DATA SHEET

PE6003

Configuration

RF Load Design Connector Heat Sink

Connection Method Standard Body Style Straight

Electrical Specifications (Values at 25°C, sea level)

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
VSWR			1.05:1	
Input Power			0.5	Watts

Precision

**SMA Female** 

Passivated Stainless Steel

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Range	DC to 18					GHz

#### **Mechanical Specifications**

**Temperature** 

Operating Range -55 to +125 deg C

Size

Length 0.53 in [13.46 mm] Width/Dia. 0.25 in [6.35 mm]

Connector

Type SMA Female

Inner Conductor Material and Plating

Outer Conductor Material and Plating

Beryllium Copper, Gold

Passivated Stainless Steel

Body Material and Plating

Passivated Stainless Steel

**Compliance Certifications** (visit www.Pasternack.com for current document) RoHS Compliant

#### **Plotted and Other Data**

Notes:

• Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 0.5 Watt RF Load Up To 18 GHz With SMA Female Input Passivated Stainless Steel PE6003



© 2015 Pasternack Enterprises All Rights Reserved






# 0.5 Watt RF Load Up To 18 GHz With SMA Female Input Passivated Stainless Steel

## TECHNICAL DATA SHEET

PE6003

#### **Outline Drawing**

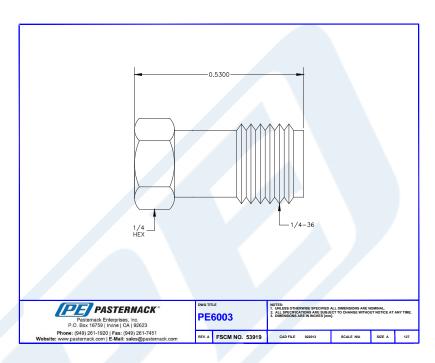

0.5 Watt RF Load Up To 18 GHz With SMA Female Input Passivated Stainless Steel from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 0.5 Watt RF Load Up To 18 GHz With SMA Female Input Passivated Stainless Steel PE6003

URL: http://www.pasternack.com/0.5-watts-sma-female-rf-load-up-to-12.4-ghz-precision-pe6003-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

