


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

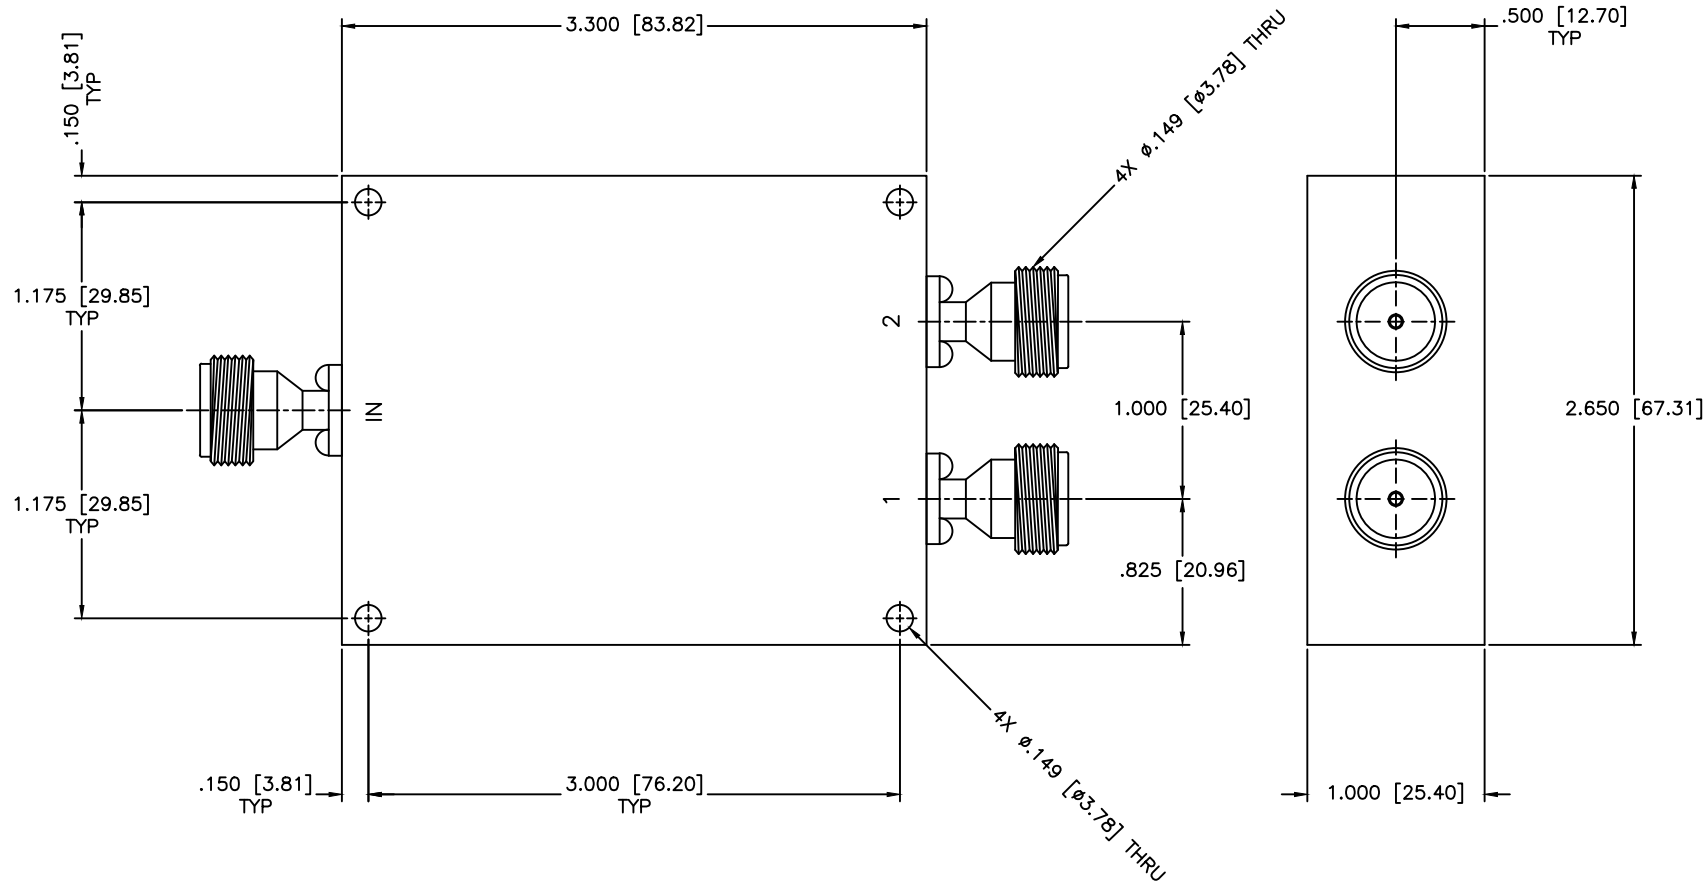

SPECIFICATIONS

Frequency Range: 30–88 MHz
Insertion Loss: 0.35dB Max.
Isolation: 35dB Min.
Phase Balance: ± 5 Deg. Max.
Amplitude Balance: ± 0.2 dB Max.
VSWR: 1.35:1 Max.
Input Power: 100 W CW

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-8118 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE:		2-WAY POWER DIVIDER		
PART NO.		PLH2-31		
DRAWING: Paboon Luekhamhan	DATE: 02-01-2011	PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		
APPROVED: T. Nguyen	DATE: 02-01-2011	CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		