

SMA PLUG .141

SC3011

SPECIFICATIONS

ELECTRICAL

FREQUENCY: 0-18 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.2 MAX


MECHANICAL

MATERIALS BODY: PASS. STAINLESS STEEL
MATERIALS CONTACTS BeCu
CONTACT PLATING: Au 30 μ-IN
CENTER CONTACT: BRASS
INTERFACE: MIL-STD-348A
INSULATOR: TEFLON

SMA NUT TORQUE: 8 IN-IBS

OP TEMP -65° TO +165° C

ROHS COMPLIANT

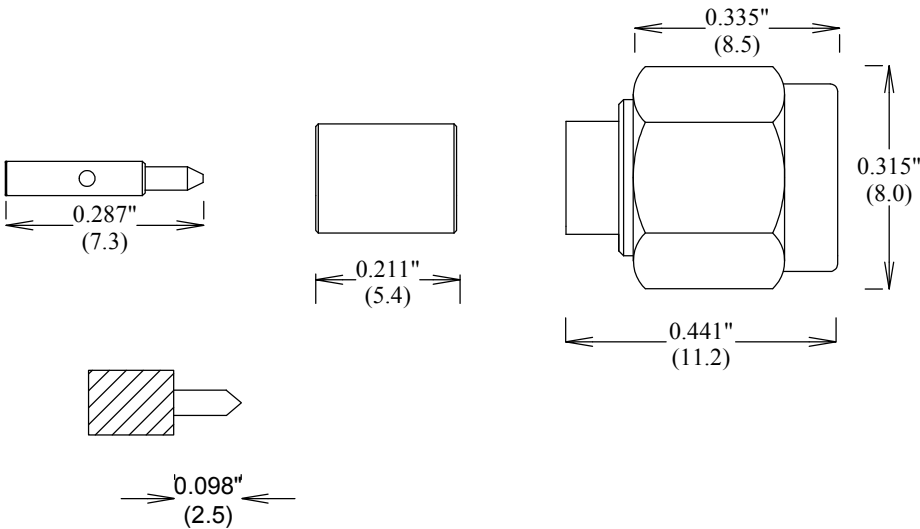

RECOMMENDED
STRIPPING

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA PLUG .141

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC3011	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(MM) Typical