


RoHS Compliant

LOW PIM ADAPTER

Environmental data

Frequency range : DC ~ 6GHz
 V.S.W.R : 1.20 : 1 Max
 PIMD : 165 dBc min(2x20W)
 Operating Temperature : -45°C ~ 120°C

Connector parts	Materials	Finish
Body	Brass	SUCO Plated
Coupling cap	Brass	SUCO Plated
Center contact	Be-cu	Silver Plated
Insulator	TEFLON	—
O-RING	Silicone Rubber	—

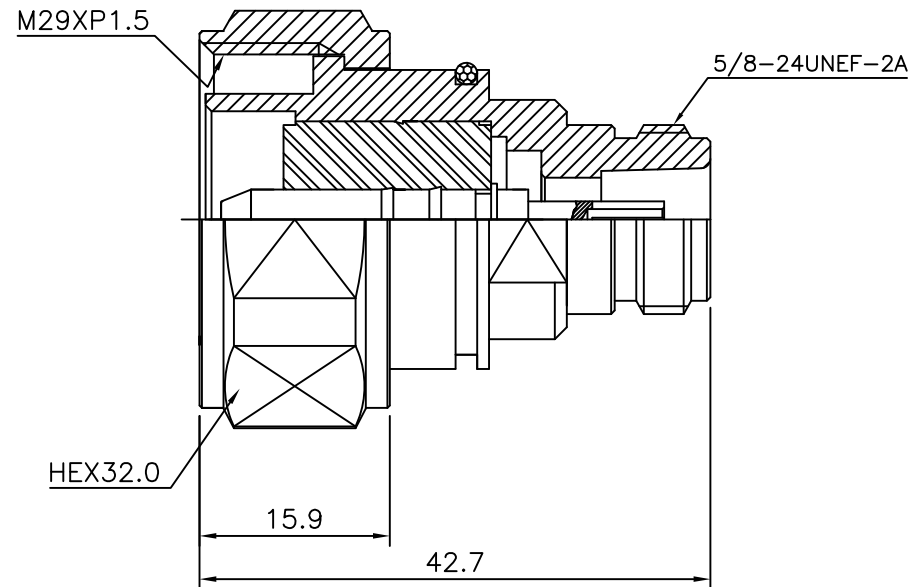

				Drawn: T. P 10/25/13	Title: DIN TYPE(M) TO N-TYPE(F)						
				Checked: D. H 10/25/13							
Description	Ecn.No	Date	Rev	Approved: S. K 10/25/13							
 Tel:877-777-8432 www.vidaRF.com				Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only.							
				Unless Otherwise Specified tolerance are:							
				.XX ±0.13 [.005"]							
				.X ±0.20 [.008"]							
				X ±0.50 [.019"]							
				Cage Code		Part No: ADP-3000-342-LP					
				6KQ83							
				View:							
											
											
				Size:	B4	Scale:	4:1	Sheet:	1/1	Rev:	A