


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

MECHANICAL
 CONTACT: BREAK BEFORE MAKE
 ACTUATOR: FAILSAFE
 SWITCHING SPEED: 20 mSEC MAX


ELECTRICAL
 ACTUATOR VOLTAGE: 28.0 Vdc (22.0–32.0 Vdc)
 ACTUATOR CURRENT: 0.190 A MAX @ 28.0 Vdc
 POWER HANDLING: 200W CW @ 1.0 GHz

ENVIRONMENTAL
 OPERATING TEMP: -54°C TO +90°C
 SINE VIBRATION: 30 G'S rms
 LIFE: 1,000,000 CYCLES
 RANDOM VIBRATION: 20 G'S rms

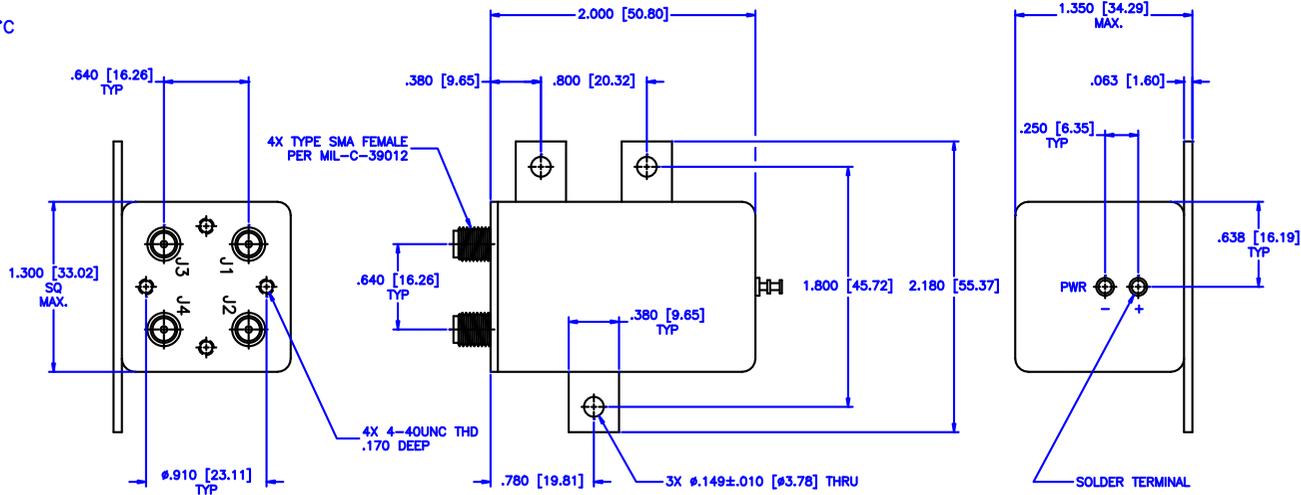

SPECIFICATION:

FREQUENCY RANGE (GHz):	DC-2.0	2.0-4.0	4.0-8.0	8.0-12.4
VSWR (Max.):	1.20:1	1.25:1	1.30:1	1.40:1
INSERTION LOSS (dB):	0.20	0.25	0.30	0.40
ISOLATION (dB):	90	80	80	70
IMPEDANCE (Ohms):	50	50	50	50

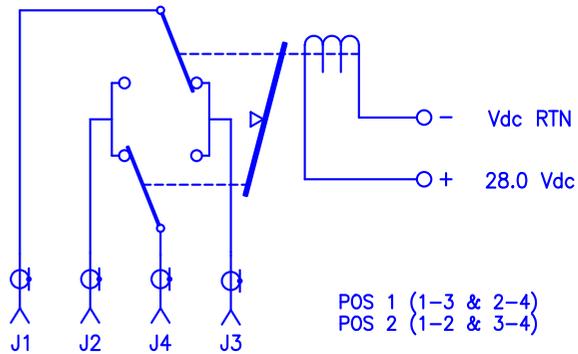

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 03-31-2001	DRAWING TITLE: ELECTROMECHANICAL SWITCHES	
APPROVED: T. Nguyen		DATE: 03-31-2001	PART NO.: C1-6-F	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: \pm 1/64 DECIMALS: \pm .01 \pm .005 ANGLE: \pm 1/2°		CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DWG NO.: 84713	DO NOT SCALE THE DRAWING	