


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

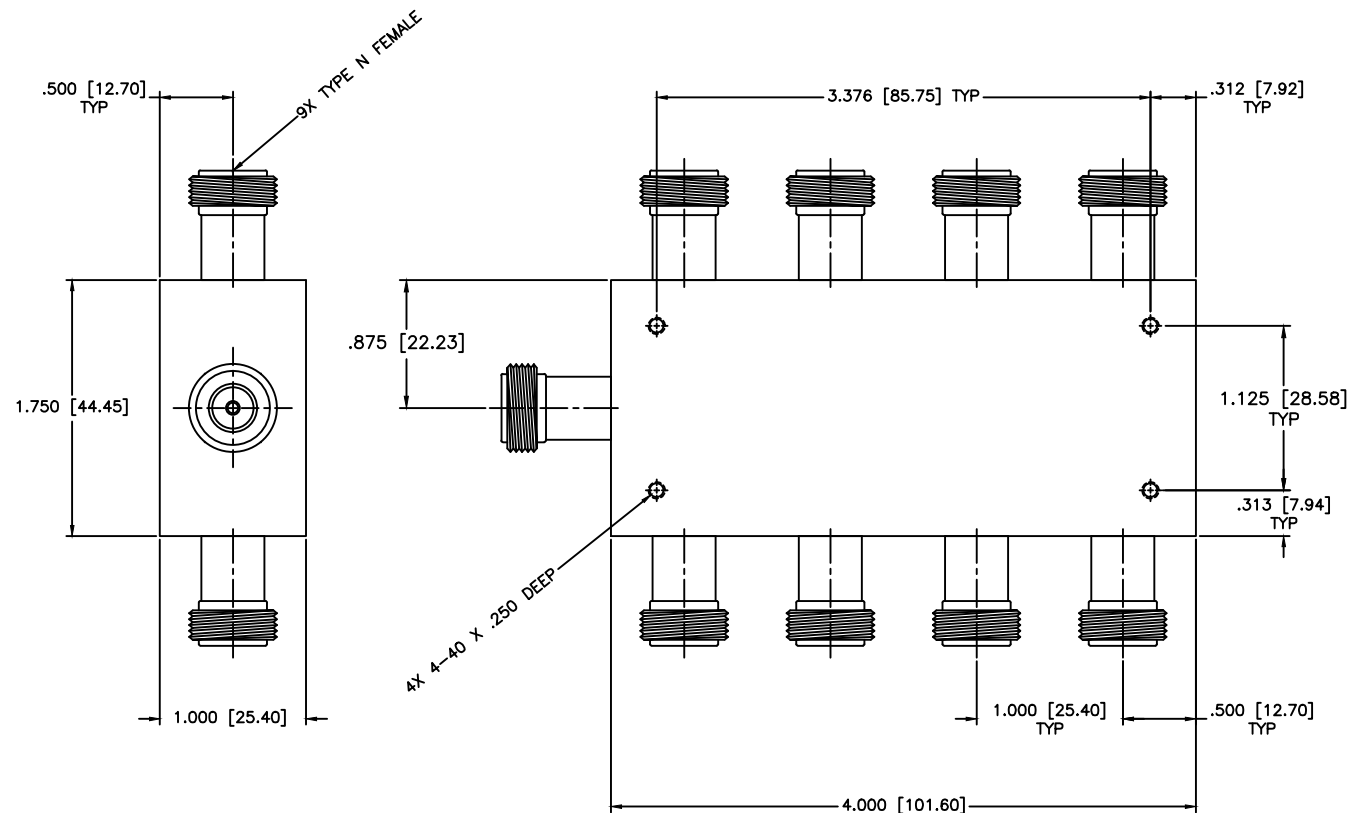

SPECIFICATIONS

Frequency Range: 10–1000 MHz
 Isolation: 22dB Min.
 VSWR: 1.40:1 Max.
 Insertion Loss: 2.2dB Max.
 Amplitude balance: ± 0.6 dB Max.
 Phase balance: ± 8 Deg. Max.
 Power: 1 Watt Max.

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 02-17-2006		DRAWING TITLE: 8-WAY POWER DIVIDER
APPROVED: T. Nguyen		DATE: 02-17-2006		
PROPERLY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: PL8-7/NF CAGE CODE: OD2L5 SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING		DWG NO.: 82492