




Model: PS-5000-2S

Description:..... 2-Way Power Divider
Operating Frequency:..... 0.45 - 5 GHz
Insertion Loss: 0.6 dB Max
Isolation: 20 dB Min
VSWR: Sum Port..... 1.30:1 Max
..... Output Ports 1.30:1 Max
Amplitude Balance:..... ± 0.1 dB Max
Phase Balance:..... $\pm 1^\circ$ Max
Power Handling (@ SUM-Port): Load VSWR= ∞ 1W AVG/CW Max
..... Load VSWR <2:1 10W AVG/CW Max
Connectors: SMA (f), Removable
Impedance: 50 Ohms Nominal
Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: MIL-STD-202F, Method 103B Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Outline
(A = 6.000" [152.4mm])**

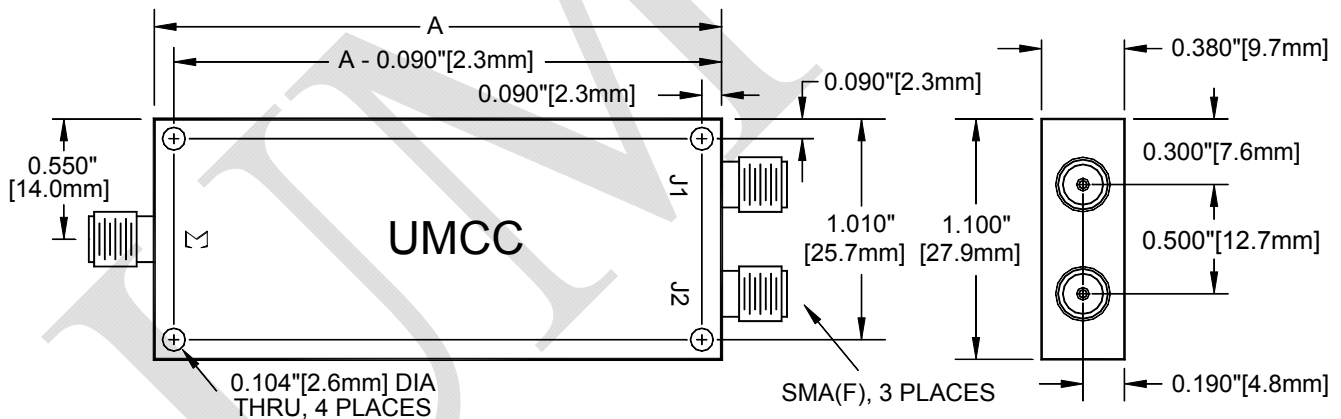

Weight
2.7 oz [76.5 g]