
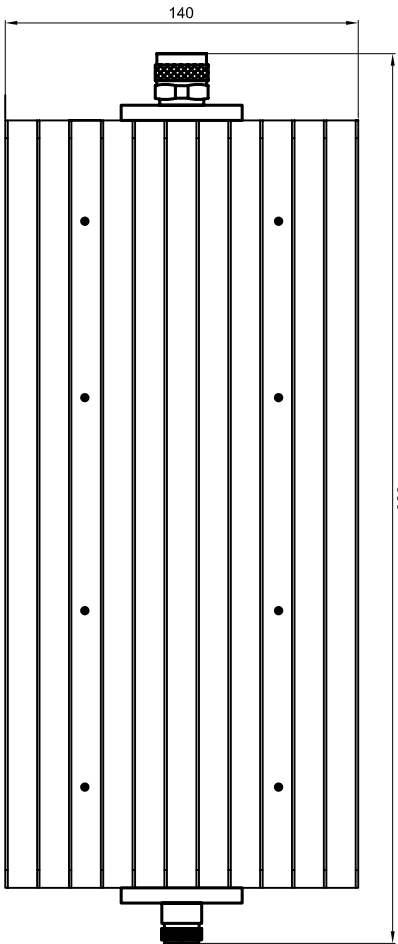
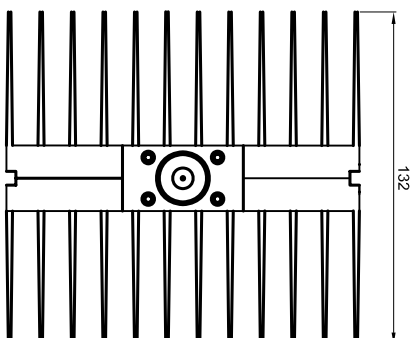


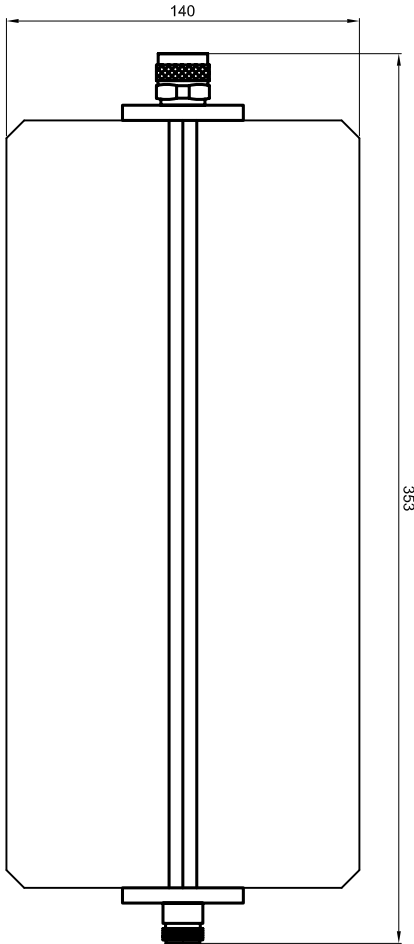

Specification:

- 1. Nominal Impedance: 50Ω
- 2. Frequency Range: DC-4GHz
- 3. Attenuation & Error:

Nominal Attenuation (dB)	DC-2.5GHz	2.5-4GHz
10	±0.4	±0.5
- 4. VSWR: 1.25@DC-2.5GHz, 1.35@2.5-4GHz
- 5. Power Rating: 250W (CW)
- 6. Connector: Nln-Nf, Stainless Steel, gold plated beryllium copper contacts

步骤/项目	数量	审核/复核、设计、材料标准等	图号	525.1202
设计	DESIGNED_SHJ	审核	CHECKED_ZH	审核 - 日期
批准	APPROVED_	文件号	FILENAME	日期
批准	11/4/6	比例	1:3	



BXT Technologies
Tel:0591-83789500
www.bxt-technologies.cn

Fix Attenuator

10A-2504-34

版本 EDITION

图样 SHEET