








REV.	DATE	ECR NO.	DESCRIPTION
NC	06/26/10	XXXXXX	INITIAL RELEASE

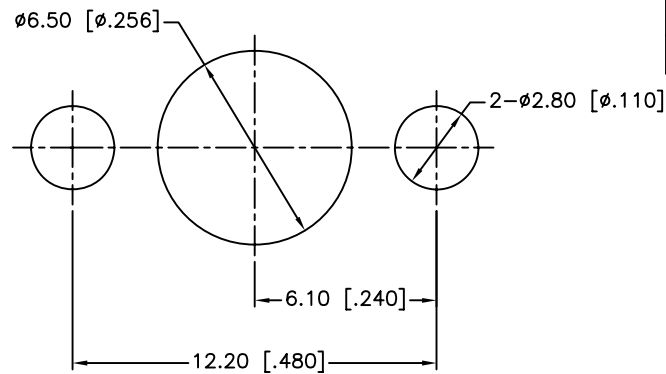

RECOMMENDED
MOUNTING HOLE

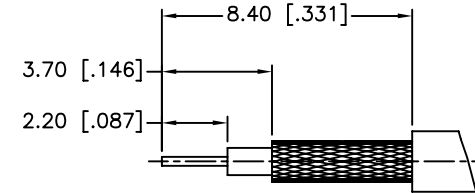

RECOMMENDED
CABLE STRIPPING DIM'S

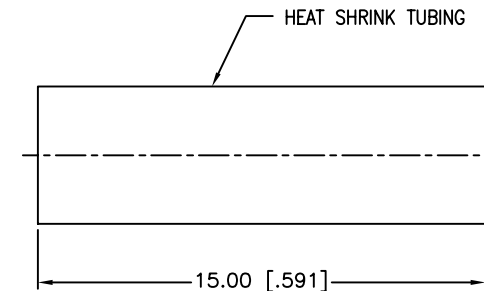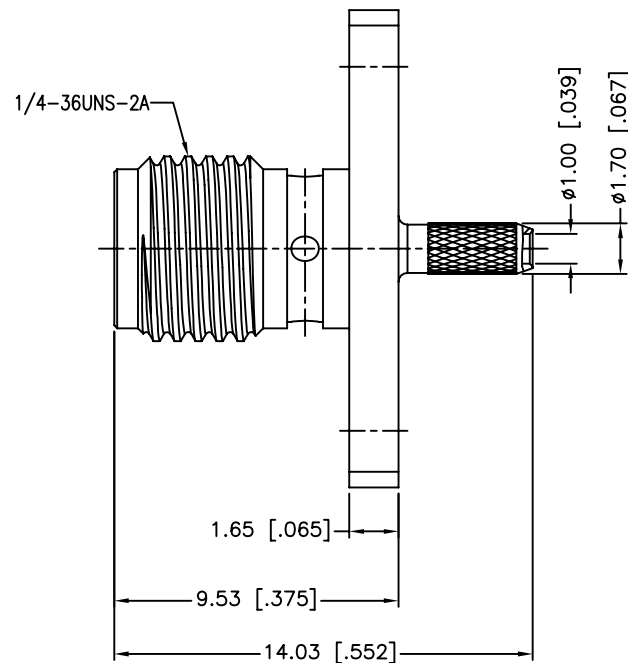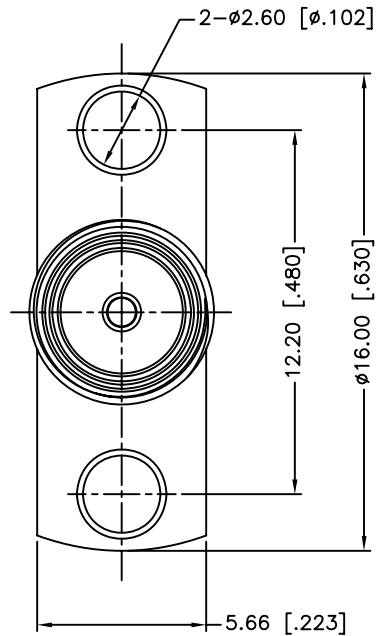

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

5	HEAT SHRINK TUBING		BLACK	1
4	FERRULE	COPPER	GOLD	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm $\pm 0.20\text{mm}$ 8 - 30mm $\pm 0.40\text{mm}$ 30 - 120mm $\pm 0.50\text{mm}$
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 $\pm 0.007"$.315 - 1.180 $\pm 0.015"$ 1.180 - 4.724 $\pm 0.020"$
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	06/26/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/132406.DWG

Amphenol Connex			
PART DESCRIPTION			
SMA PANEL CRIMP JACK (FOR RG-178B/U,196A/U CABLE)			
PART NO.			
132406			
DWG. NO.	132406.DWG	REV.	NC
SIZE	A	SCALE	NA