


Electrical Specifications

Item	Parameter	Unit	Specification
1	Center Reject Frequency	MHz	820
2	Reject Frequency Range	MHz	791 ~ 850
3	Passband Frequency	MHz	DC ~ 787
4	Passband Insertion Loss	dB	1.5 dB max up to 750MHz 4.0 dB max 750MHz ~ 787MHz
5	Return Loss in BW	dB	10 min
6	Reject Band Attenuation	dB	15 dB min @791MHz 23 dB min @792MHz 15 dB min @791~850MHz
7	Input Power	Watts	1.0 max
8	In / Out Impedance	Ohm	75
9	Operating Temp.	°C	-10 ~ +55
10	RoHS	-	Yes

Dimensions (unit: mm)



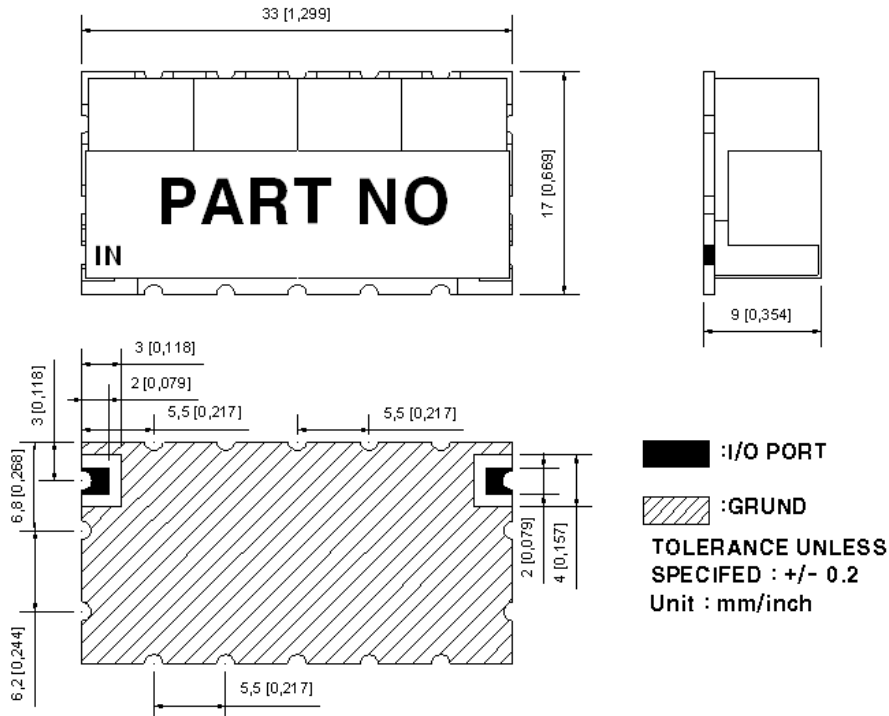

Plots

