



C Female Bulkhead Connector Clamp/Solder  
Attachment For RG59, RG62, .596 inch D Hole

**TECHNICAL DATA SHEET**

**PE44098**

**C Female Bulkhead Connector Clamp/Solder Attachment For RG59, RG62, .596 inch D Hole**

**Configuration**

|                                          |              |
|------------------------------------------|--------------|
| Connector                                | C Female     |
| Connector Interface Type                 | RG59, RG62   |
| Cable Attachment Method (Shield/Contact) | Clamp/Solder |
| Body Style                               | Straight     |
| Mount Method                             | Bulkhead     |

**Electrical Specifications**

|                 |    |
|-----------------|----|
| Impedance, Ohms | 50 |
|-----------------|----|

**Mechanical Specifications**

**Size**

|                     |               |
|---------------------|---------------|
| Length, in [mm]     | 1.28 [32.51]  |
| Width/Dia., in [mm] | 0.75 [19.05]  |
| Weight, lbs [g]     | 0.068 [30.84] |

**Connector**

|                              |               |
|------------------------------|---------------|
| Type                         | C Female      |
| Contact Material and Plating | Silver        |
| Body Material and Plating    | Brass, Nickel |
| Dielectric Type              | Teflon        |

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

|                |     |
|----------------|-----|
| RoHS Compliant | Yes |
|----------------|-----|

**Plotted and Other Data**

|        |                            |
|--------|----------------------------|
| Notes: | Values at 25 °C, sea level |
|--------|----------------------------|

C Female Bulkhead Connector Clamp/Solder Attachment For RG59, RG62, .596 inch D Hole from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [C Female Bulkhead Connector Clamp/Solder Attachment For RG59, RG62, .596 inch D Hole PE44098](http://www.pasternack.com/c-female-standard-rg59-rg62-connector-pe44098-p.aspx)

URL: <http://www.pasternack.com/c-female-standard-rg59-rg62-connector-pe44098-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE44098 CAD Drawing



C Female Bulkhead Connector Clamp/Solder Attachment  
For RG59, RG62, .596 inch D Hole

ASSEMBLY PROCEDURES

SLIDE CLAMP NUT (1), WASHER (2) & GASKET (3) OVER CABLE. STRIP CABLE AS SHOWN. DO NOT NICK BRAID WHILE CUTTING JACKET. TAPER END OF BRAID TO PERMIT ASSEMBLY OF BRAID CLAMP (4). SLIDE BRAID CLAMP (4) OVER BRAID & SEAT AGAINST CABLE.

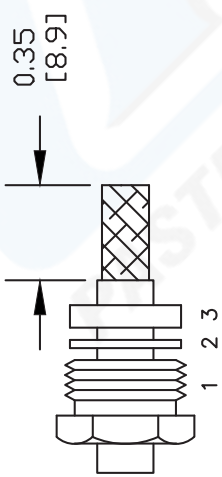

2. FORM BRAID OVER CLAMP NUT (4). TRIM BRAID BACK TO SHOULDER. CUT DIELECTRIC & CENTER CONDUCTOR TO DIMENSION SHOWN. DO NOT NICK CENTER CONDUCTOR. SOLDER CONTACT TO CENTER CONDUCTOR. REMOVE EXCESS SOLDER. DO NOT OVER HEAT DIELECTRIC. INSERT CABLE ASSEMBLY INTO BODY & TIGHTEN.

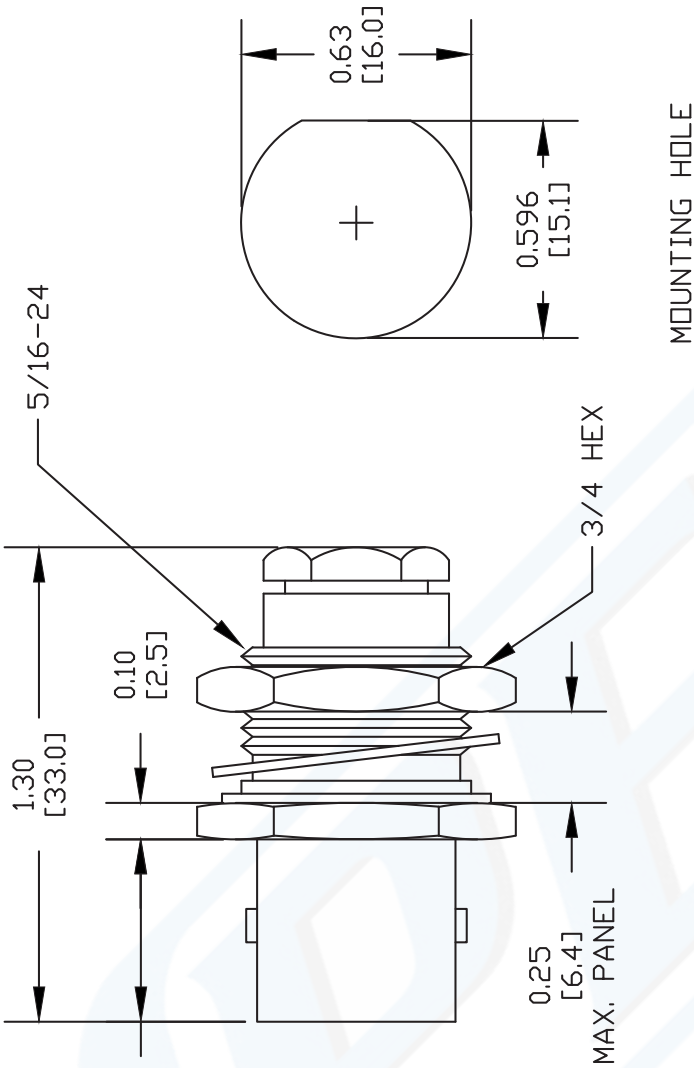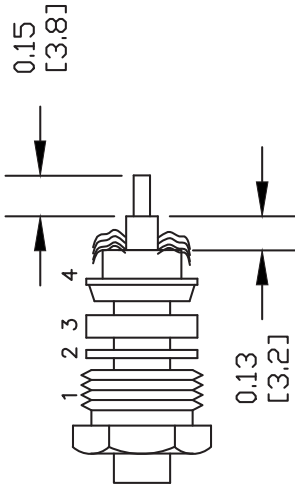

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE

PE44098

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

CAD FILE 070302

SCALE N/A

SIZE A

127