



MICROWAVE FILTER CO., INC.

RF Variable Step Attenuators



These variable attenuators operate from DC to 3 GHz with an average power rating of 2 Watts.



ARV-0030-002-50S



ARV-0030-002-11N

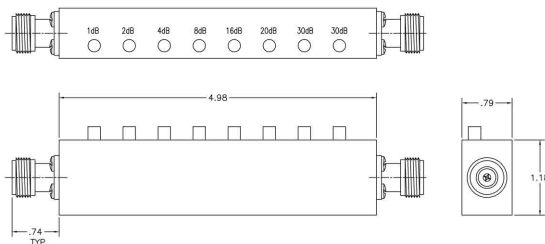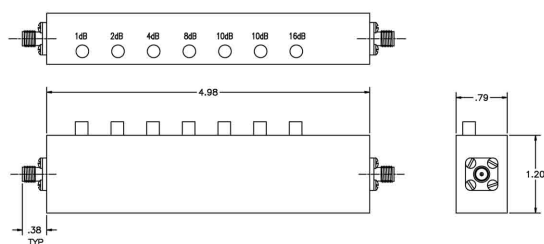

Technical Specifications:

Model Number	Attenuation Range	Attenuation Variability	VSWR (Max)	Connector Type
ARV-0030-002-50S	0 - 50 dB	1 dB step	1.60:1	SMA-female
ARV-0030-002-11N	0 - 110 dB	1 dB step	1.40:1	N-female

Common Specifications:

Operating Band:	DC - 3.0 GHz
Insertion Loss:	3.8 dB Max
Avg. Power Rating:	2 Watts Max
Operating Temperature:	-20C to +60C
Impedance:	50 Ohms