

7/16 MALE 4H-LMR 600 CABLE CONNECTOR

SC4949

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-6 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.25:1 MAX

MECHANICAL:


MATERIALS BODY: TRIMETAL PLATED BRASS
MATERIALS CONTACTS: SI PLATED BRASS
MATERIALS COUPLING NUT: TRIMETAL PLATED BRASS
INSULATOR: TEFLON
CRIMP SLEEVE: Ni PLATED BRASS
O-RING: SILICONE RUBBER
INTERFACE: IEC 169-4

ROHS COMPLIANT

7/16 MALE

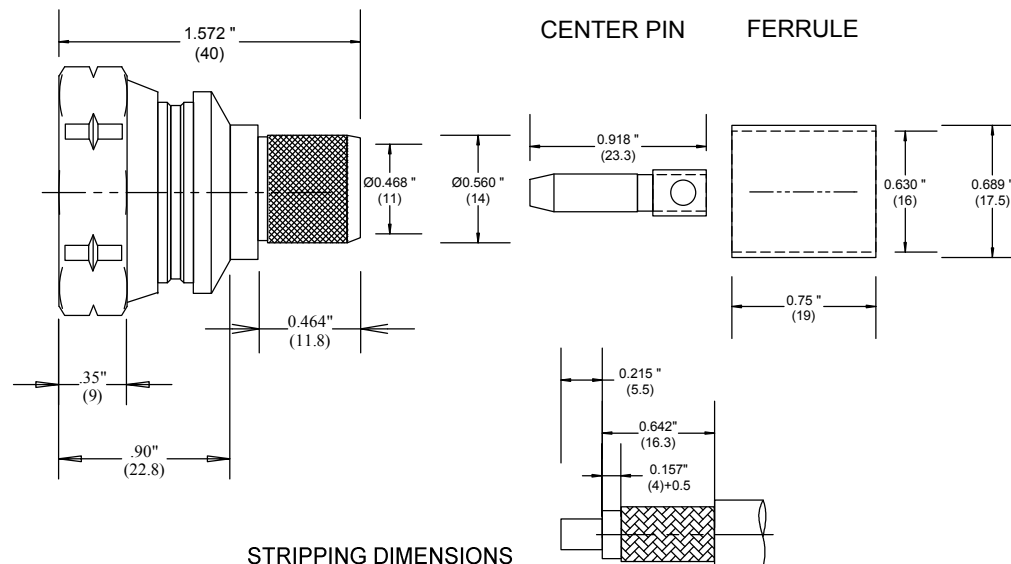

STRIPPING DIMENSIONS

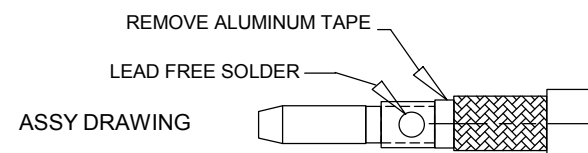

ASSY DRAWING

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

7/16 MALE 4H-LMR 600 CABLE CONNECTOR

ALL DIMENSIONS IN inches(mm) Typical

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC4949	A
SCALE		SHEET	