

5-9 GHz Bandpass Filter

◆ Features:



- Ultimate Attenuation Out to 19 GHz
- Small Package: 2.0" X 1.0" X .5"




◆ Specifications:

3 dB Bandwidth:	4 GHz
VSWR:	2.0:1
Stopbands:	
DC-4 GHz	50 dB
10-19 GHz	>50 dB
Insertion Loss:	<1.0 dB @ 7 GHz
Group Delay Variation:	<1.5 nS over any 1 GHz within 5-9 GHz passband
Shock:	20 G's, 1/2 SINE, 11Ms
Vibration:	10 G's, 10 Hz-2000 Hz
Temperature:	-55 to +85 °C
Relative Humidity:	0 - 95%

◆ Outline Drawing:

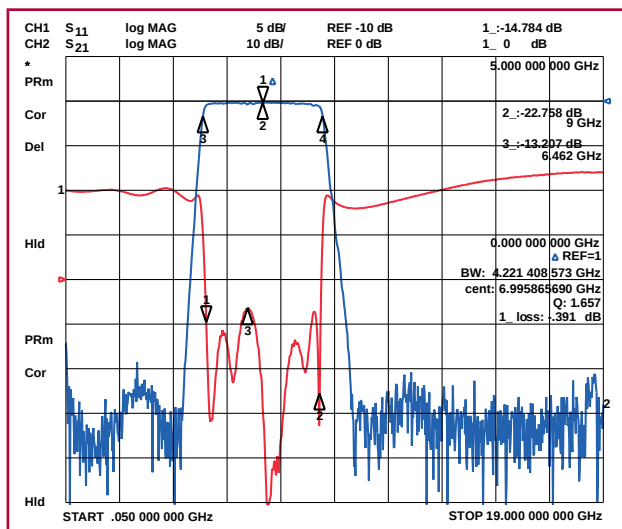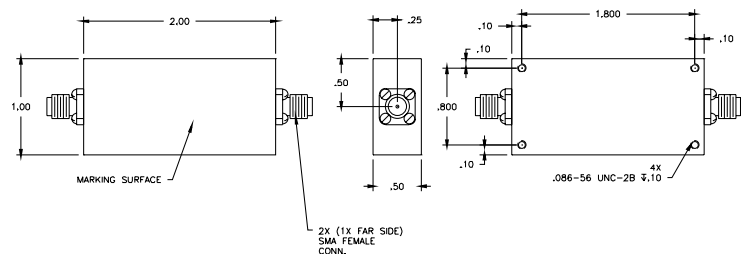

Passband

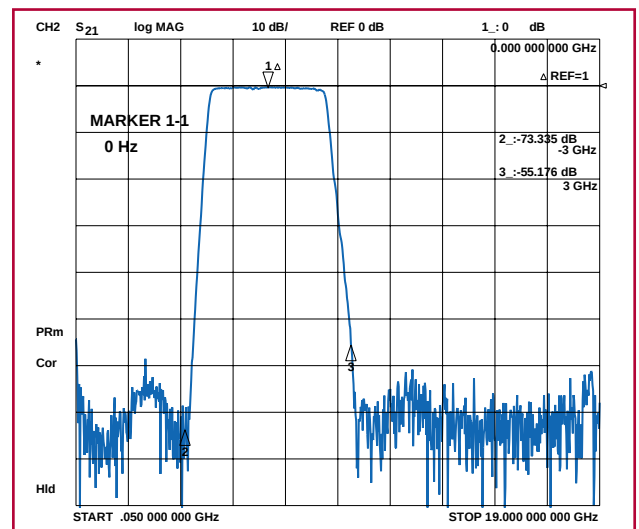

VSWR / Stopbands

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

