




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

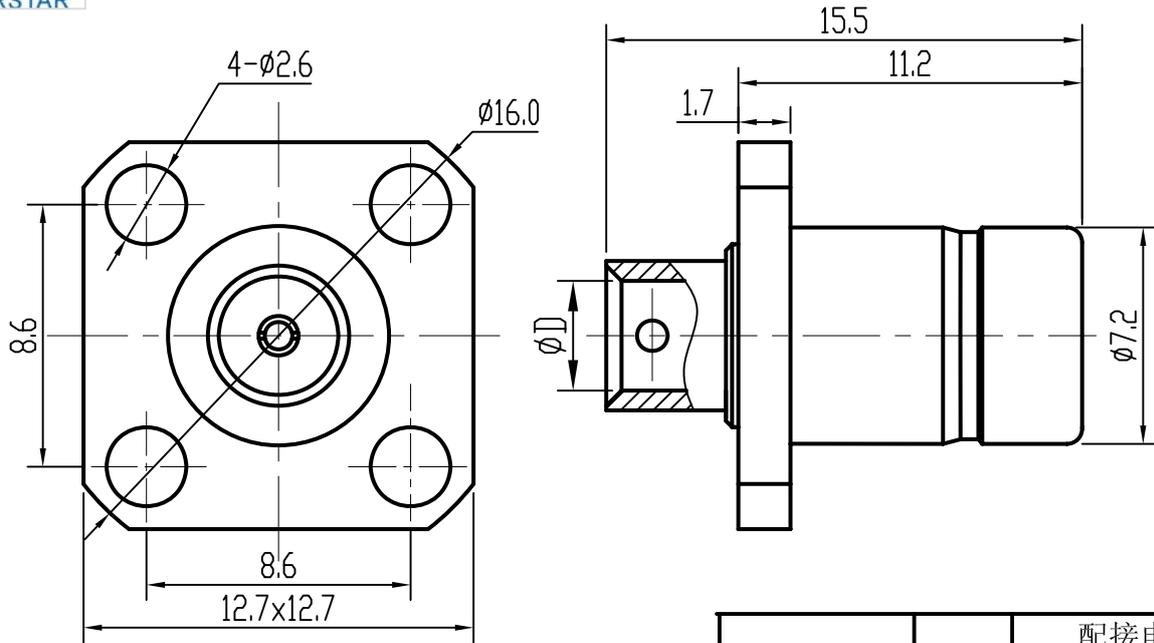

产品型号	∅D	配接电缆 (cable)
CQA-KFB2	2.2	SFT-50-2-1 RG405/U
CQA-KFB3	3.6	SFT-50-3-1 RG402/U

Electrical Characteristics

- Characteristic Impedance: 50 Ω
- Frequency range: DC~18.0GHz
- Contact resistance
Center conductor: ≤3.0 mΩ
Out conductor: ≤2.0 mΩ
- Insulation resistance: ≥5000MΩ
- Insulator withstanding: 1000V
- Durability: 200cycles

Application: MIL-C-39012/55D

Material&Finishing

- Center contact :
beryllium coper, gold plated
- Body: brass, gold plated
- Insulators: PTFE

主要性能指标

- 特性阻抗: 50 Ω
- 频率范围: DC~18.0GHz
- 接触电阻:
中心导体: ≤3.0 mΩ
外导体: ≤2.0 mΩ
- 绝缘电阻: ≥5000MΩ
- 介质耐压: 1000V
- 插拔次数: 200次

执行标准: MIL-C-39012/55D

材料和镀层

- 中心接触件:
镀青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

	SCALE	
	5:1	
	NAME	DATE
DRAWN		
CHECKED		
APPROVED		

RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X± .15 ±1°
.XX± .05
.XXX±

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.