

N-M RG316 SOLDER/CRIMP CONNECTOR

SC9123

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-11 GHZ
IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 1000 VOLTS MAX


MECHANICAL:

MATERIAL BODY: NICKEL PLATED BRASS 100μ"
CENTER CONTACT: Au PLATED BRASS 30μ" MIN
DIELECTRIC: PTFE
INTERFACE: MIL-STD-348B
OP. TEMP RANGE: -65°C- +165°C

INNER: SOLDER OUTER: CRIMP

HEX CRIMP TOOLS REQUIRED: .146 & .185

ROHS COMPLIANT

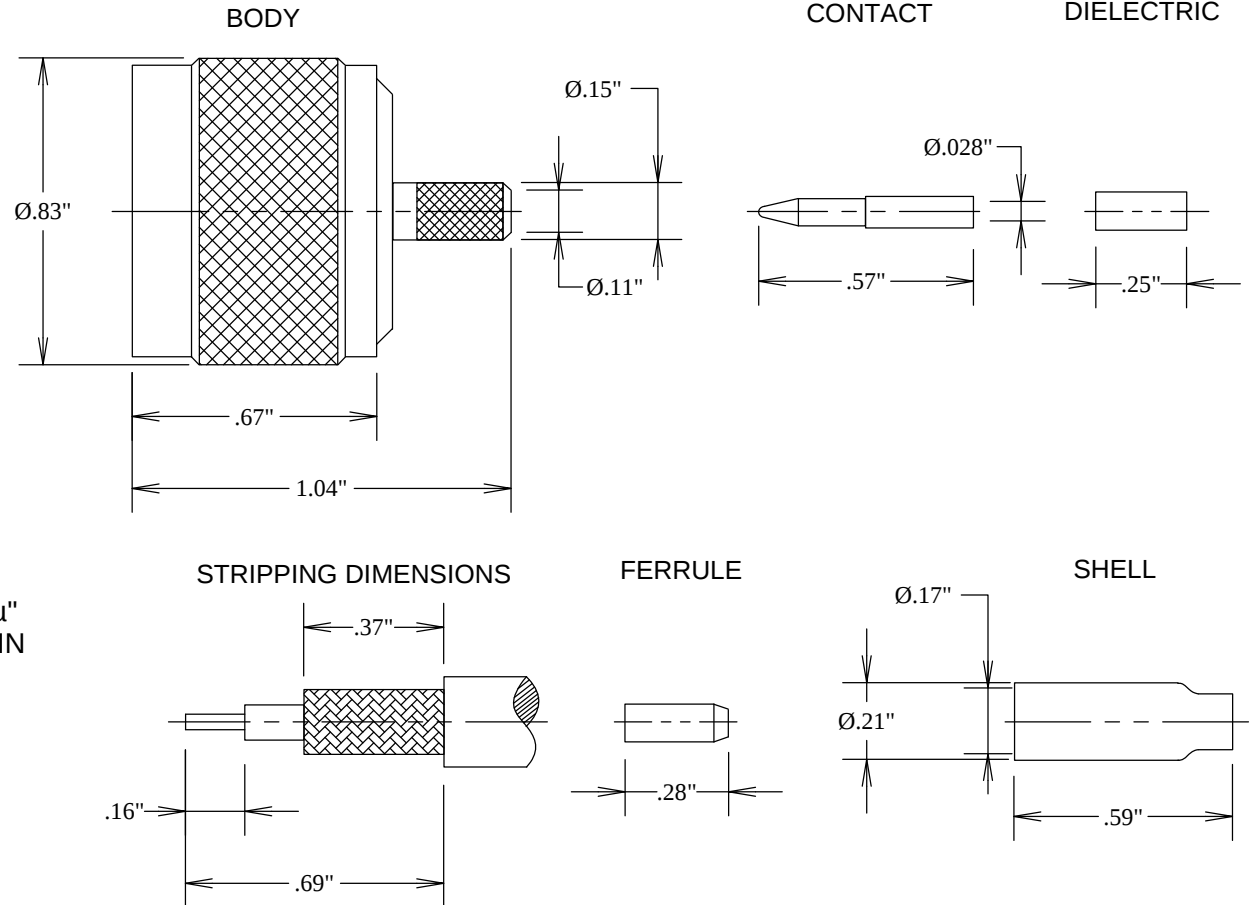

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

N-M RG316 SOLDER/CRIMP CONNECTOR

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC9123	--
SCALE	SHEET		