

# BROADBAND COAXIAL ISOLATOR

P/N:TGG300-1Q



## FEATURES AND APPLICATION:


- ♦ Octave or even wider Bandwidth with coaxial connectors at Input and Output Port
- ♦ Could be used in EW, Radar, Test systems and Wide Band Microwave Assemblys.

## TECHNICAL SPECIFICATIONS:


Frequency Range	Insertion Loss	VSWR	Isolation	Average Power FWD/REV	Transmission Direction	Connector
2-8GHz	1.6dB	1.8	13dB	10W / 2W	From Left To Right	SMA-F

## TYPICAL PLOT:

### Insertion loss

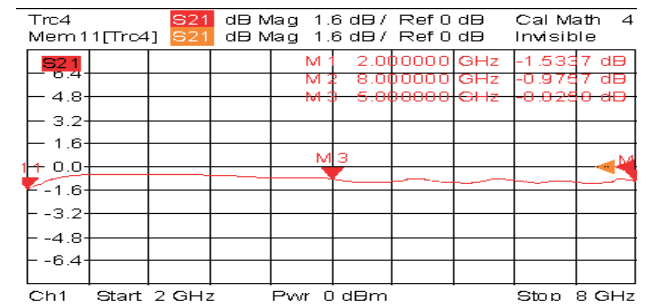


### Isolation

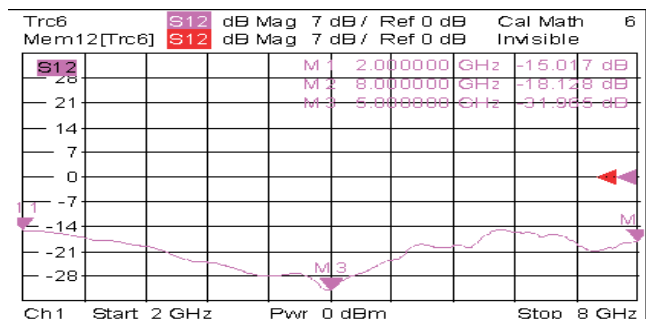

## ENVIRONMENTAL PARAMETERS:

WORKING TEMPERATURE: +10~+50℃

## OUTLINE: $\frac{\text{mm}}{(\text{inch})}$

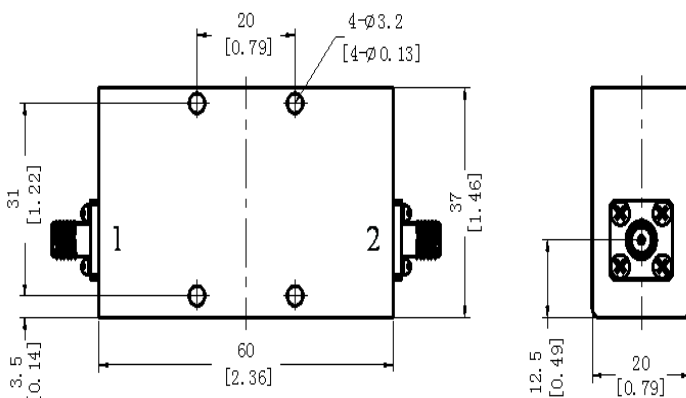

### VSWR

