



AMP2052 SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Rack mounted system
Class AB linear LDMOS design
Instantaneous wide bandwidth
Suitable for all modulations standards
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	20 - 500 MHz	
Power Output	1000 Watt Min	CW
Power Gain	60 dB Min	
Power Gain Flatness	3.0 dB p-p Max	
Input Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	>30 dBc Typ	50dBm/Tone, $\Delta = 1\text{MHz}$
Harmonics	>20 dBc Typ	
Non Harmonics Spurious	60 dBc Min	Non Harmonics
Operating Voltage	180 - 240 VAC	
Power Consumption	5000 Watt Max	At rated Pout
Max Input Power	+8 dBm	Without damage
Load VSWR Protection	$\infty: 1$	

ENVIRONMENTAL CHARACTERISTICS


Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensation

MECHANICAL SPECIFICATIONS


Parameter	Specification	Notes
Dimensions W x H x D	R5U+ R3U	Rack mounted chassis
Weight	60 Kg.	
RF Connectors In/Out	Type-N Female	
AC Power	See outline drawing	
Cooling	Built in Fan Cooling	Variable speed
OPTIONAL: Digital Monitor & Control FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	Ethernet RJ-45 TCP/IP, RS422/485, GPIB Interface	Local LCD or a Remote Bluetooth application

AMP2052 SOLID STATE HIGH POWER AMPLIFIER


OUTLINE DRAWING

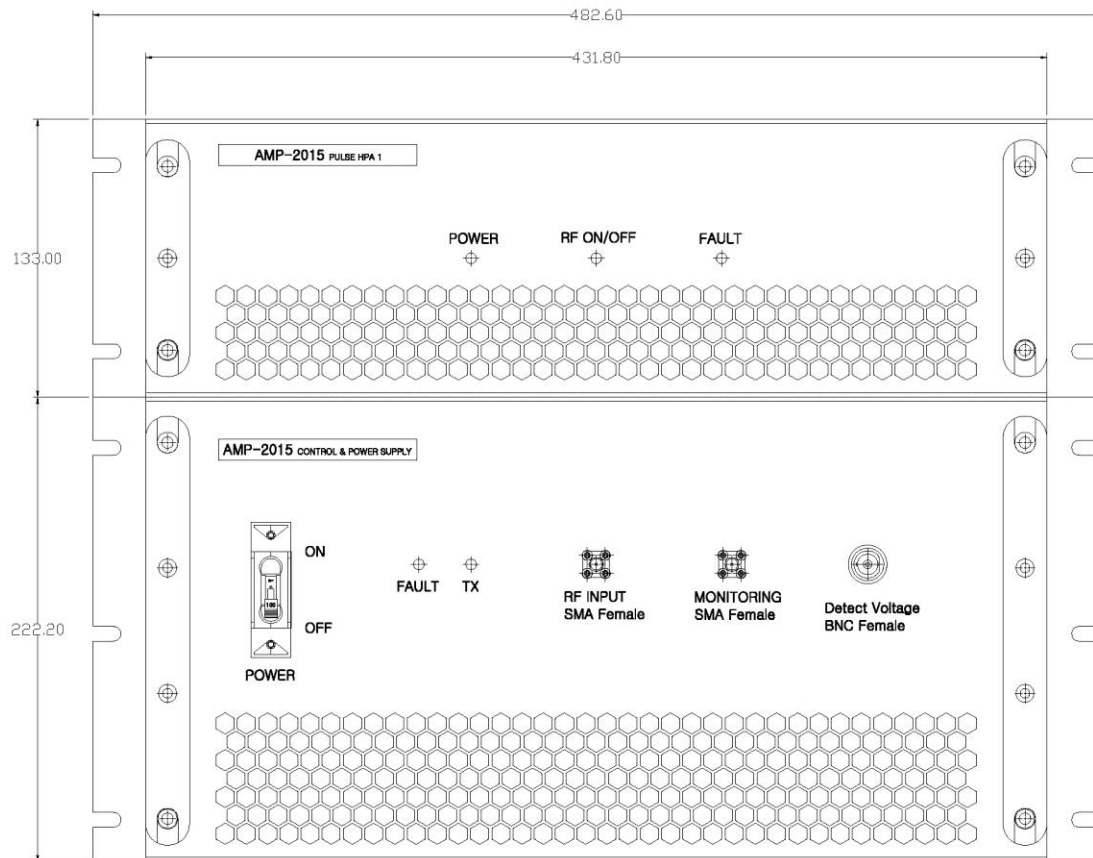

AMP2052 SOLID STATE HIGH POWER AMPLIFIER

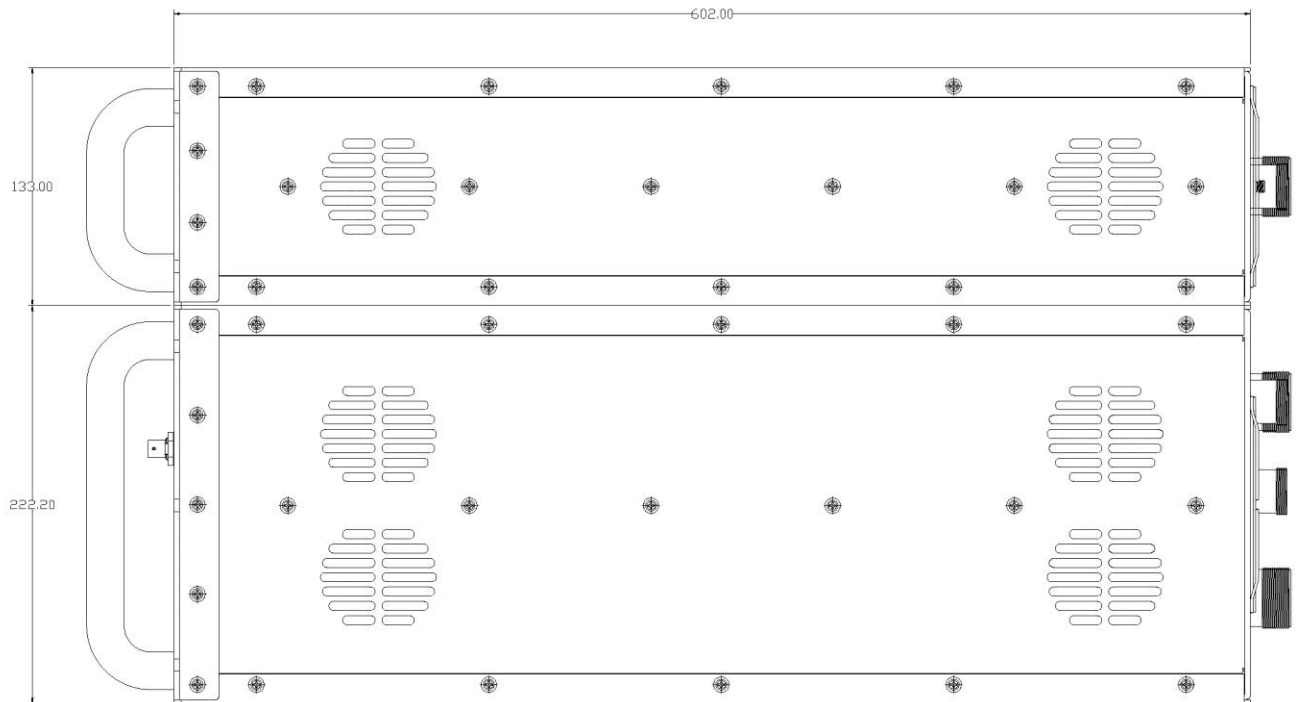


AMP2052 SOLID STATE HIGH POWER AMPLIFIER

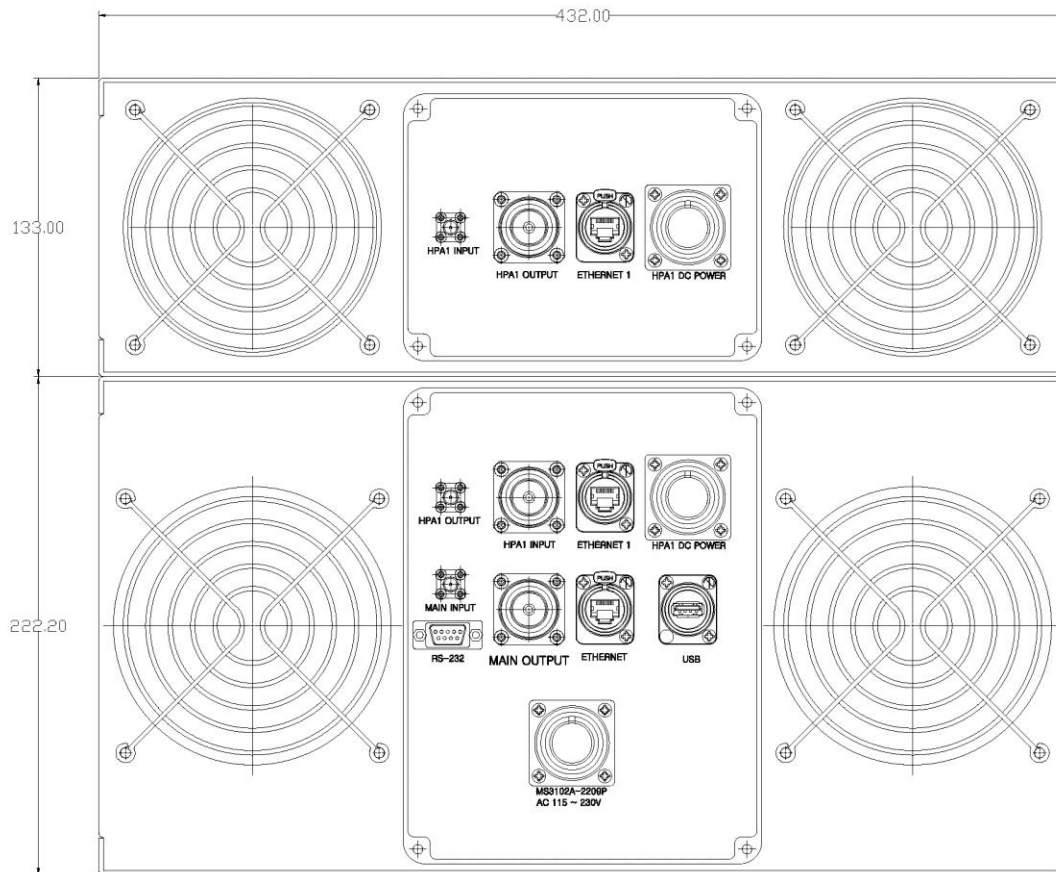



AMP2052 SOLID STATE HIGH POWER AMPLIFIER

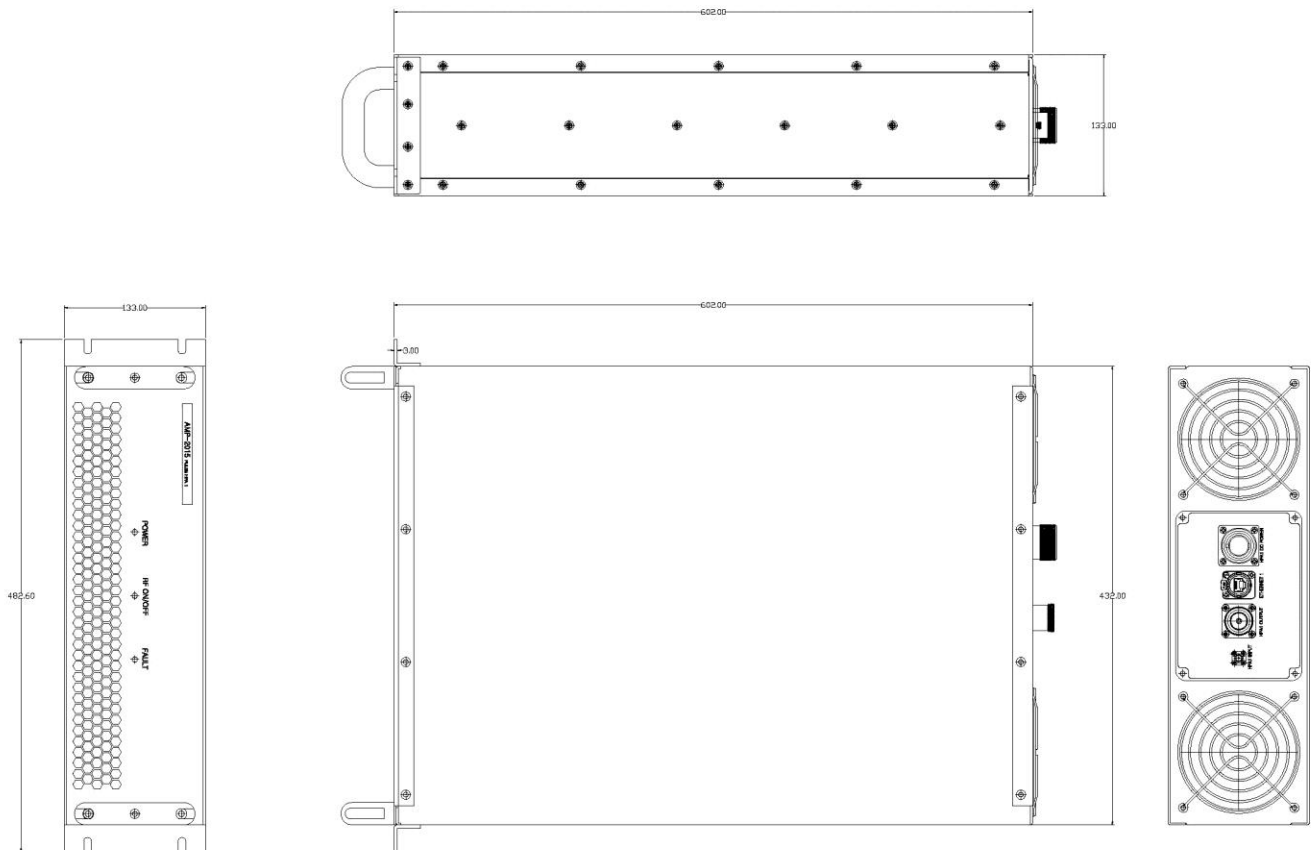

AMP2052 SOLID STATE HIGH POWER AMPLIFIER

