



ISSUE 1; September 2014 - RoHS 2011/65/EU



Description

- Simple package crystal oscillator in a hermetically sealed 8-pin DIL package

Frequency Parameters

- Frequency 1.0MHz to 100.0MHz
- Frequency Stability $\pm 25.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Ageing $\pm 5\text{ppm}$ max in 1st yr @ 25°C

Electrical Parameters

- Supply Voltage 5.0V $\pm 10\%$

Operating Temperature Ranges

- 10 to 70°C
- 40 to 85°C

Output Details

- Output Compatibility HCMOS

Drive Capability	
1.0MHz to 40.0MHz	50pF
40.0MHz to 80.0MHz	30pF
80.0MHz to 100.0MHz	15pF

Output Control

- Start Up Time: 10ms max

Output Levels

- VoL: 10% Vs max
- VoH: 90% Vs min

Noise Parameters

- Phase Jitter (12kHz-20MHz): 1ps rms max

Environmental Parameters

- Shock: 1500G, 0.5ms, 5 times in each of 6 directions, along 3 mutually perpendicular planes
- Vibration: 20G (20Hz-2000Hz), 1.5mm amplitude, cross-over frequency 80Hz, in 3 mutually perpendicular planes
- Storage Temperature Range: -55 to 125°C

Ordering Information


- Frequency*
Model*
Frequency Stability (over operating temperature range)*
Operating Temperature Range*
Supply Voltage
(*minimum required)
- Example
20.0MHz IQXO-825
HCMOS $\pm 50\text{ppm}$ -40 to 85C 5V

Compliance

- RoHS Status Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable



Outline (mm)

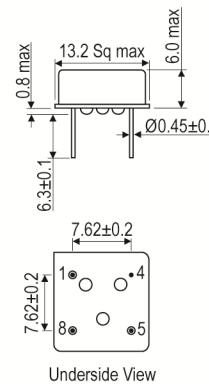

- Pin Connections
- 1. N/C
 - 4. GND
 - 5. Output
 - 8. +Vs

Underside View

Sales Office Contact Details:

UK: +44 (0)1460 270200

France: +33 (0)5 34 50 91 18

Email: info@iqdfrequencyproducts.com

Germany: +49 (0) 30 408 192 300

USA: +1 408.273.4530

Web: www.iqdfrequencyproducts.com



Packaging Details

- Pack Style: Bulk Loose in Bulk Pack
Pack Size: 40

Electrical Specification - maximum limiting values 5.0V ±10%

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.0MHz	19.999999MHz	-10 to 70 -40 to 85	±25.0 ±25.0	20 20	6 6	45/55 45/55
20.0MHz	49.999999MHz	-10 to 70 -40 to 85	±25.0 ±25.0	40 40	5 5	45/55 45/55
50.0MHz	79.999999MHz	-10 to 70 -40 to 85	±25.0 ±25.0	50 50	4 4	45/55 45/55
80.0MHz	100.0MHz	-10 to 70 -40 to 85	±25.0 ±25.0	70 70	4 4	45/55 45/55

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200

France: +33 (0)5 34 50 91 18

Email: info@iqdfrequencyproducts.com

Germany: +49 (0) 30 408 192 300

USA: +1 408.273.4530

Web: www.iqdfrequencyproducts.com