


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

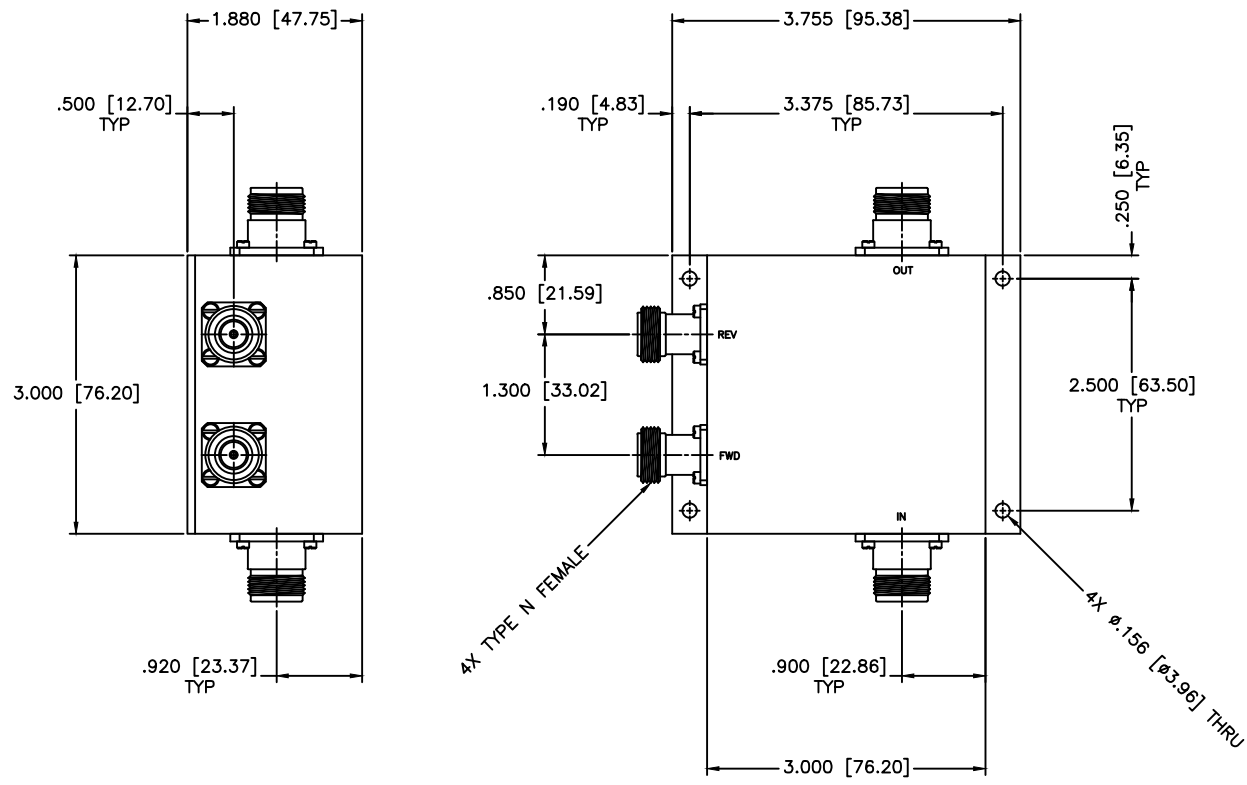

SPECIFICATIONS

FREQUENCY RANGE: 20–500 MHz
 FLATNESS: $\pm 0.5\text{dB}$
 INSERTION LOSS: 0.30dB Max.
 DIRECTIVITY: 20dB Min.
 VSWR: 1.20:1 Max.
 POWER: 500 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER	
		PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. HDL-25-60-500	
DRAWN: Paiboon Luekhamhan	DATE: 12-08-2008	THIRD ANGLE PROJECTION	CAGE CODE:	SIZE: C
APPROVED: T. Nguyen	DATE: 12-08-2008		REV: N/A	DWG NO. 84032
		OD2L5	DO NOT SCALE THE DRAWING	