




RF-LAMBDA

The power beyond expectations

RFSP8TA0612G

Absorptive 6-12.0GHz Coaxial SP8T Switch

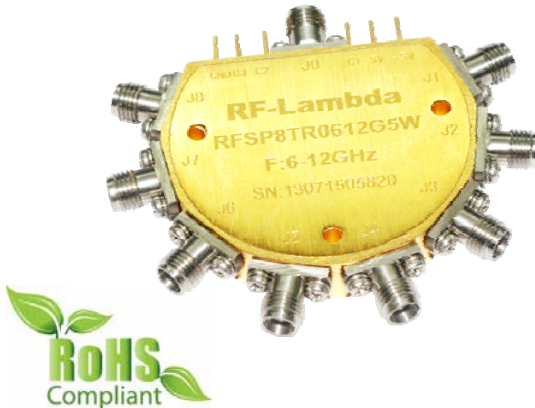

Features

- Wide Band Operation 6-12.0GHz
- High Power Handle Capability up to 100W upon request.
- TTL compatible driver include
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Temperature Range -40°C~+85°C
- Customization available upon request

Specification	Absorptive type			
	PN: RFSP8TA0612G			
	Low	Med	High	
Frequency Range(GHz)	6	9	12	
Insertion Loss(dB)	1.6dB typ. @6GHz	2.0dB typ. @9GHz	2.5dB typ. @12GHz	
VSWR	1.3	1.3	1.5	
Isolation(dB)	85	85	80	
Switching Speed(ns)	50	100	150	
P1dB Power (dBm)		24		
Absolutely max. Power (W)			1	
Weight (g)	65			
IIP3 (Input IP3) dBm	40			
Impedance(Ohms)	50Ω			
Power Supply (V)	+/-5 V DC			
Current(mA)	280mA (+5V) 100mA (-5V)			
Input Connector	SMA-Female			
Output Connector	SMA-Female			
Finishing	Gold Plating			
Material	Brass			
Seal	Hermetically Sealed			
Control (TTL Driver Included)	TTL Control			
	C3	C2	C1	Status
	0	0	0	Jo-J1
	0	0	1	Jo-J2
	0	1	0	Jo-J3
	0	1	1	Jo-J4
	1	0	0	Jo-J5
	1	0	1	Jo-J6
	1	1	0	Jo-J7
	1	1	1	Jo-J8

Absorptive Coaxial Single Pole Eight Throw Switch 6-12.0GHz



RF-LAMBDA

The power beyond expectations


RFSP8TA0612G

Absolute Maximum Ratings	
Biasing	+/-5 V
TTL Control Voltage	+5V/oV
Input RF power	1W
Storage Temperature (C°)	-50 ~ +125

Biasing Up Procedure	
Step 1	-5V
Step 2	+5V
Step 3	TTL
Power OFF Procedure	
Step 1	+5V
Step 2	-5V
Step 3	TTL

Environment specifications	
Operational Temperature (C°)	-45 ~ +85
Storage Temperature (C°)	-50 ~ +125
Altitude	30,000 ft (Controlled environment)
Vibration	65g rms (15 degree 2KHz)
Humidity	100% RH at 35c, 95%RH at 40 deg c
Shock	20G for 11msc

Ordering Information		
Part No	ECCN	Description
RFSP8TA0612G	EAR99	SP8T 6-12.0GHz PIN Diode Switch

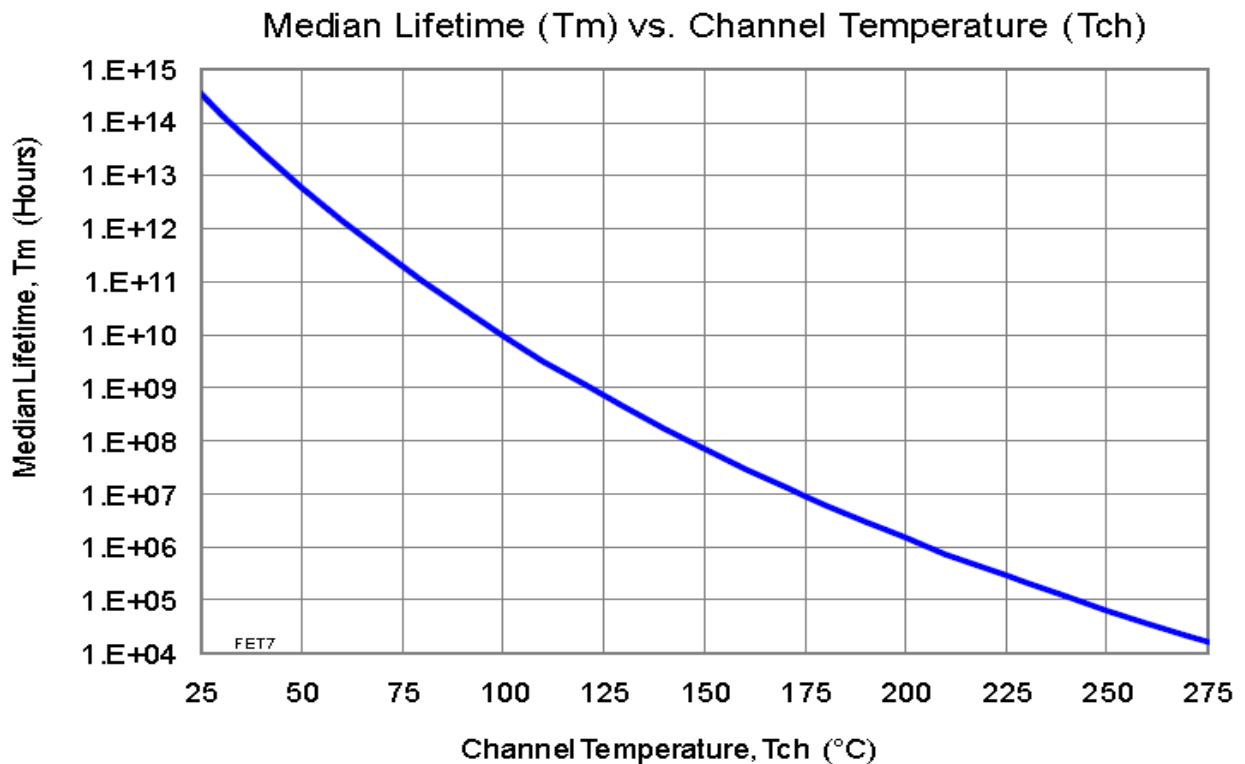

Absorptive Coaxial Single Pole Eight Throw Switch 6-12.0GHz



RF-LAMBDA

The power beyond expectations

RFSP8TA0612G

Absorptive Coaxial Single Pole Eight Throw Switch 6-12.0GHz

