


剥线尺寸
stripping dimension

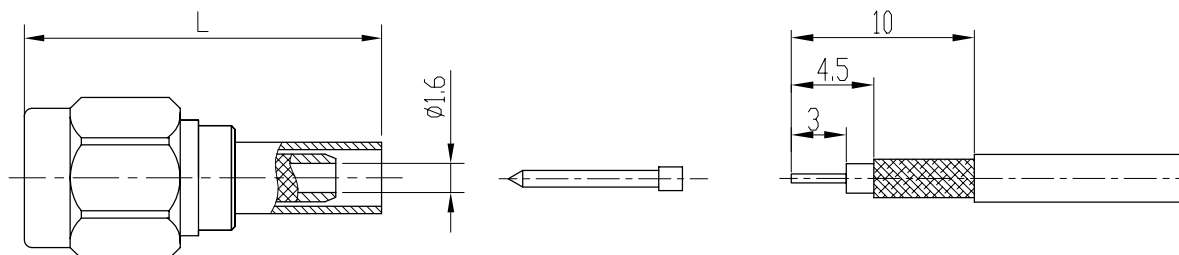

产品型号 type	电缆型号 cable type	L	备注 remark
SMA-J3	SFF-50-1.5-1、RG316/U	19.5	
SMA-J3N			
SMA-J3G			连接套, 不锈钢 coupling nut, stainless steel
SMA-J3A	RG316DT	19	

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~4.0GHz
- Contact resistance
Center conductor: $\leq 4.0\ m\Omega$
Out conductor: $\leq 2.5\ m\Omega$
- Insulation resistance: $\geq 1000M\Omega$
- Insulator withstanding: 750V
- VSWR: ≤ 1.35
- Durability: 500cycles

主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~4.0GHz
- 接触电阻:
中心导体: $\leq 4.0\ m\Omega$
外导体: $\leq 2.5\ m\Omega$
- 绝缘电阻: $\geq 1000M\Omega$
- 介质耐压: 750V
- 电压驻波比: ≤ 1.35
- 插拔次数: 500次

Application: MIL-C-39012/55D

执行标准: MIL-C-39012/55D

Material&Finishing

- Center contact :
Male: brass, gold plated
- Body: brass, gold plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 壳体: 黄铜, 镀金
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

 		SCALE	SMA-J3 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		2.5:1		
DRAWN	NAME	DATE		
CHECKED				
APPROVED				

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.