


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

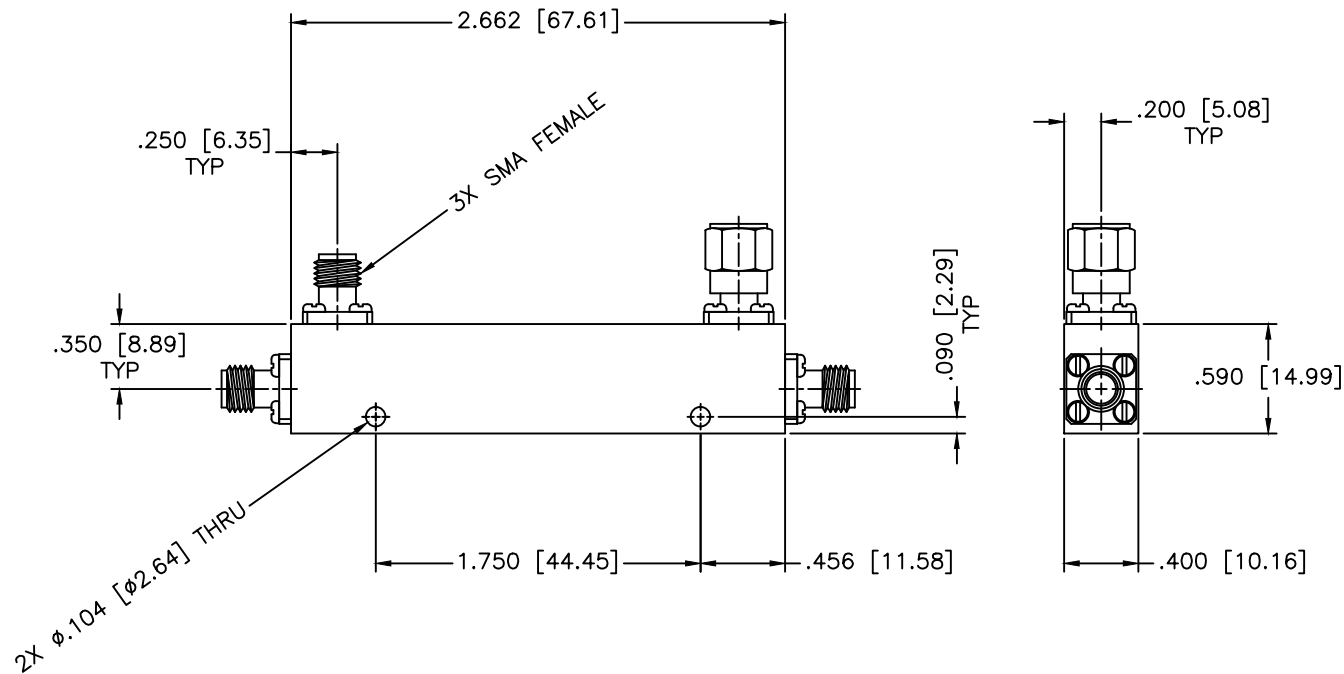

SPECIFICATIONS

Frequency Range: 880–960 MHz
 Coupling: 30 ± 1.0 dB
 Frequency Sensitivity: ± 0.5 dB
 Insertion Loss: 0.20 dB Max.
 Directivity: 25 dB Min.
 VSWR: 1.25:1 Max.
 Power Incident, Reflected: 50W, 50W, 3kW Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DRAWING TITLE: DIRECTIONAL COUPLER		
DATE: 04-01-1999		PART NO. C77-30		
APPROVED: T. Nguyen		DATE: 04-01-1999		
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 80482