


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

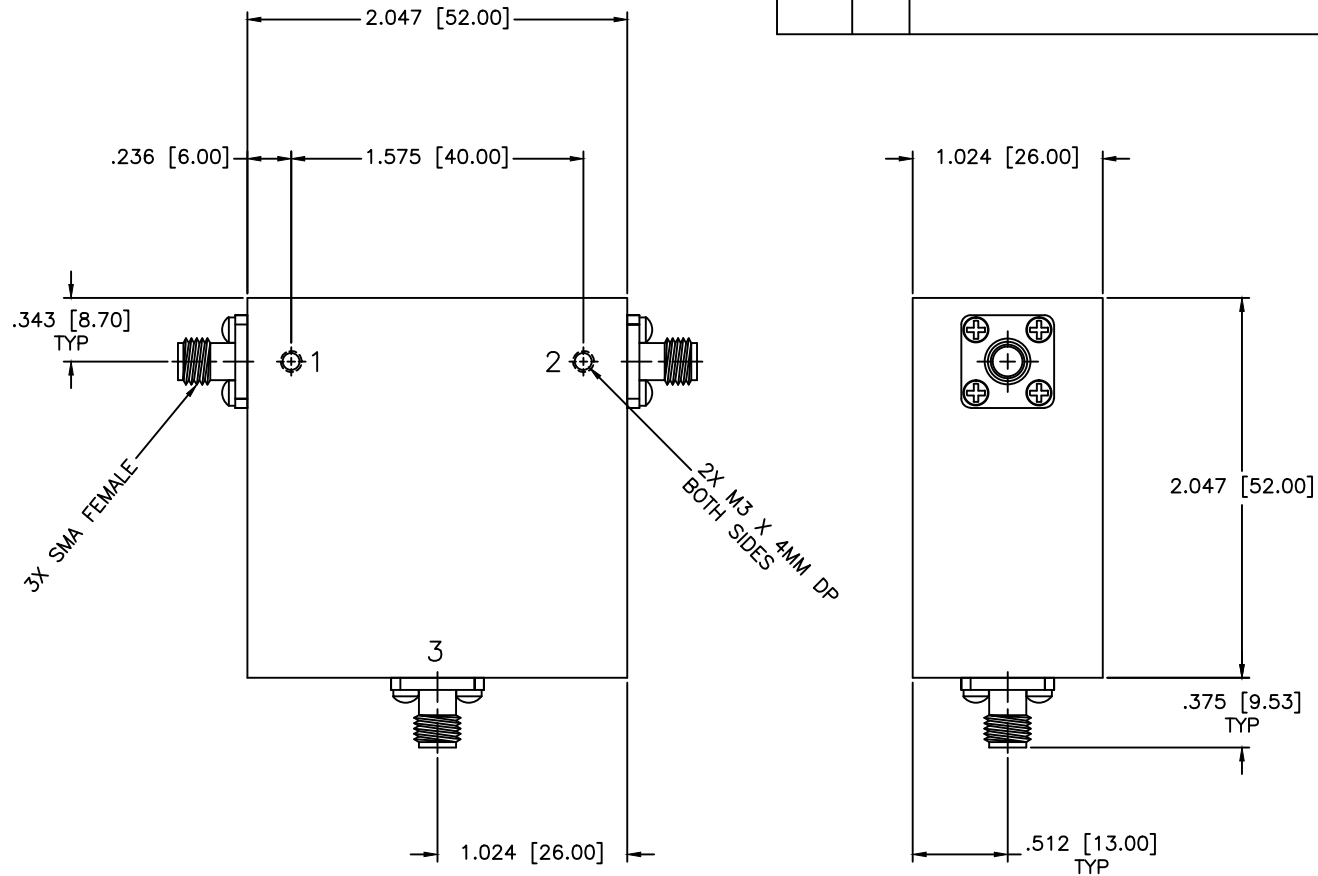

SPECIFICATIONS

Frequency Range: 0.728–1.000 GHz
 Isolation: 19dB Min.
 Insertion loss: 0.50dB Max.
 VSWR: 1.30:1 Max.
 Forward Power: 100 Watts
 Operating Temperature: –10°C to +60°C

MATERIAL:		MCL I		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± N/A DECIMALS: ±.05 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR		SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 12-02-2009		CS-167		PART NO.	
APPROVED: T. Nguyen		DATE: 12-02-2009					
THIRD ANGLE PROJECTION		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:		DWG NO.	
				OD2L5		DO NOT SCALE THE DRAWING	84648
				SIZE: N/A			