

## 75 Ohm F Male to F Female Right Angle Adapter



### TECHNICAL DATA SHEET

PE9166

#### 75 Ohm F Male to F Female Right Angle Adapter

##### Configuration

Connector 1	F Male
Impedance 1	75 Ohms
Connector 2	F Female
Impedance 2	75 Ohms
Adapter Design	Standard
Body Style	Right Angle

##### Electrical Specifications

Frequency Range, MHz	DC to 1,000
Maximum Operating Voltage, Volts	500

##### Mechanical Specifications

###### Temperature

Operating Range, deg C	-40 to +60
------------------------	------------

###### Size

Length, in [mm]	1.02 [25.91]
Width/Dia., in [mm]	0.438 [11.13]
Height, in [mm]	0.71 [18.03]

##### Connector 1

Type	F Male
Inner Conductor Material and Plating	Brass, Gold
Inner Conductor Plating Specification	30μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel
Coupling Nut Plating Specification	100μ in. minimum
Hex Size, in.	7/16
Torque, in-lbs [Nm]	15 [1.7]
Body Material and Plating	Brass, Nickel
Body Plating Specification	100μ in. minimum
Dielectric Type	POM

##### Connector 2

Type	F Female
Inner Conductor Material and Plating	Brass, Gold
Inner Conductor Plating Specification	30μ in. minimum
Body Material and Plating	Brass, Nickel
Body Plating Specification	100μ in. minimum
Dielectric Type	PP

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to F Female Right Angle Adapter PE9166](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

## 75 Ohm F Male to F Female Right Angle Adapter



### TECHNICAL DATA SHEET

PE9166

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

Yes

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level


URL: <http://www.pasternack.com/f-male-f-female-right-angle-adapter-pe9166-p.aspx>

75 Ohm F Male to F Female Right Angle Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE9166 CAD Drawing

75 Ohm F Male to F Female Right Angle Adapter

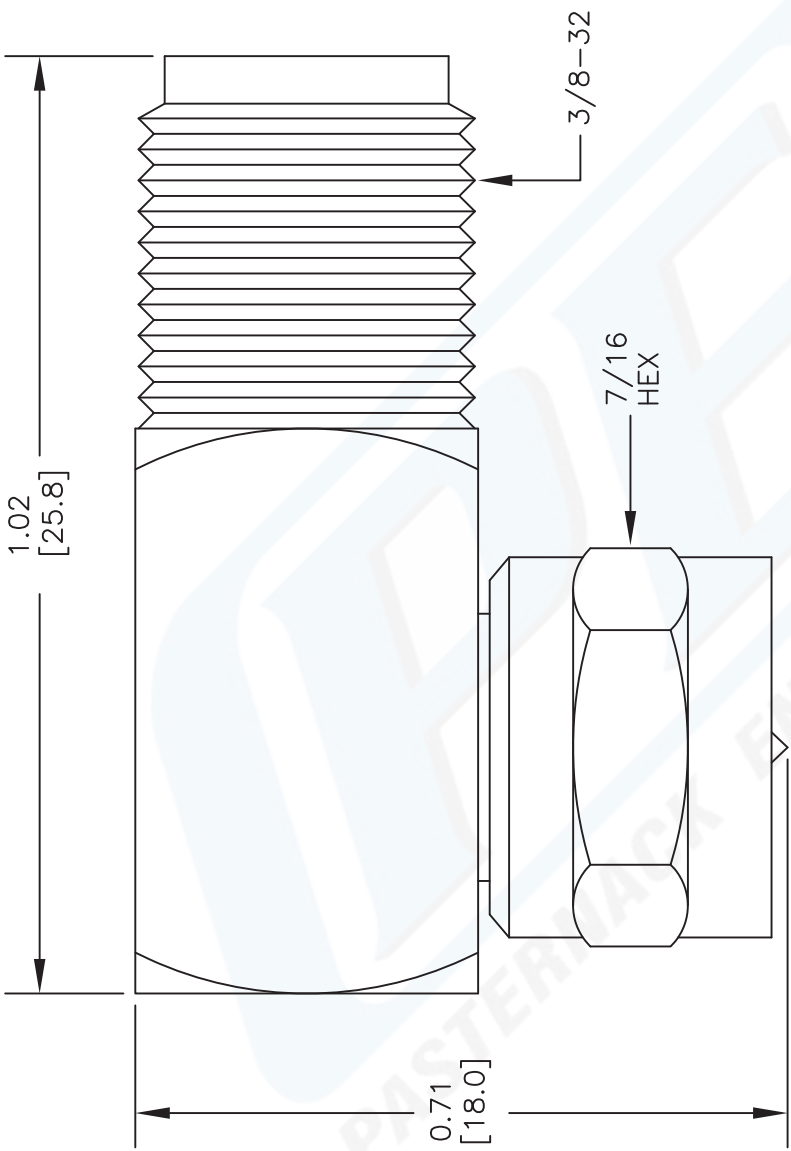

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE9166**

FSCM NO. 53919

2233

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com