




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

剥线尺寸
stripping dimension

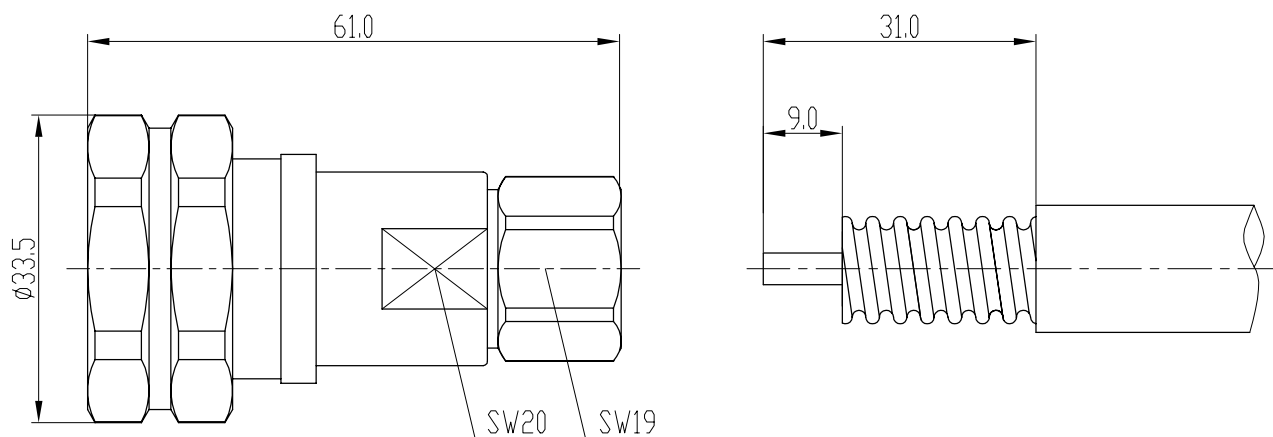

产品型号 type	配接电缆 cable type	备注 remark
L29-J533A	F5J4-50(HELIAX ANDREW)	内焊丝焊接 free solder for center contact

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~6Ghz
- Contact resistance
Center conductor: $\leq 1.0 \text{ m}\Omega$
Out conductor: $\leq 0.5 \text{ m}\Omega$
- Insulation resistance: $\geq 10000 \text{ M}\Omega$
- Insulator withstanding: 4000V
- VSWR: ≤ 1.5
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~6Ghz
- 接触电阻:
中心导体: $\leq 1.0 \text{ m}\Omega$
外导体: $\leq 0.5 \text{ m}\Omega$
- 绝缘电阻: $\geq 10000 \text{ M}\Omega$
- 介质耐压: 4000V
- 电压驻波比: ≤ 1.5
- 插拔次数: 500次

Application: IEC 60169-4

执行标准: IEC 60169-4

Material & Finishing

- Center contact:
Male: phosphor bronze, silver plated
- Out conductor: brass, silver plated
Other metal parts: brass, nickel plated
- Insulators: PTFE
- Gasket: silicone rubber

材料和镀层

- 中心接触件:
插针: 锡磷青铜, 镀银
- 外导体: 黄铜, 镀银
其它金属零件: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯
- 密封圈: 硅橡胶

	SCALE
	1.5:1
NAME	DATE
DRAWN	
CHECKED	
APPROVED	

L29-J533A
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO., LTD.