




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

剥线尺寸
stripping dimension

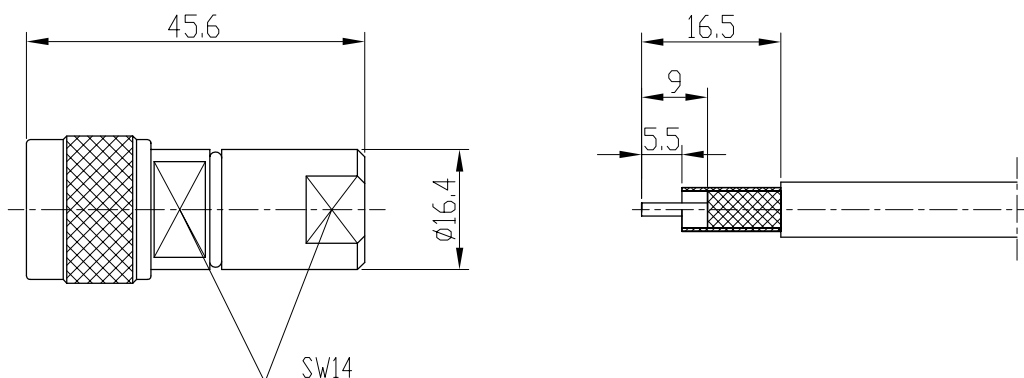

产品型号 type	电缆型号 cable type
N-J634	5D-FB

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~3Ghz
- Contact resistance
Center conductor: $\leq 1.0\ m\Omega$
Out conductor: $\leq 0.2\ m\Omega$
- Insulation resistance: $\geq 5000M\Omega$
- Insulator withstanding: 1500V
- VSWR: ≤ 1.3
- Durability: 500cycles

Application: MIL-C-39012/1E

Material & Finishing

- Center contact :
Male: phosphor bronze, gold plated
- Bodies and other metal parts:
brass, nickel plated
- Insulators: PTFE
- Gasket: silicone rubber

主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~3Ghz
- 接触电阻:
中心导体: $\leq 1.0\ m\Omega$
外导体: $\leq 0.2\ m\Omega$
- 绝缘电阻: $\geq 5000M\Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.3
- 插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 中心接触件:
插针: 锡磷青铜, 镀金
- 壳体和其它金属零件:
黄铜, 镀镍
- 绝缘子: 聚四氟乙烯
- 密封圈: 硅橡胶

	SCALE	
	1:1	
	NAME	DATE
DRAWN		
CHECKED		
APPROVED		

N-J634
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO., LTD.