


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

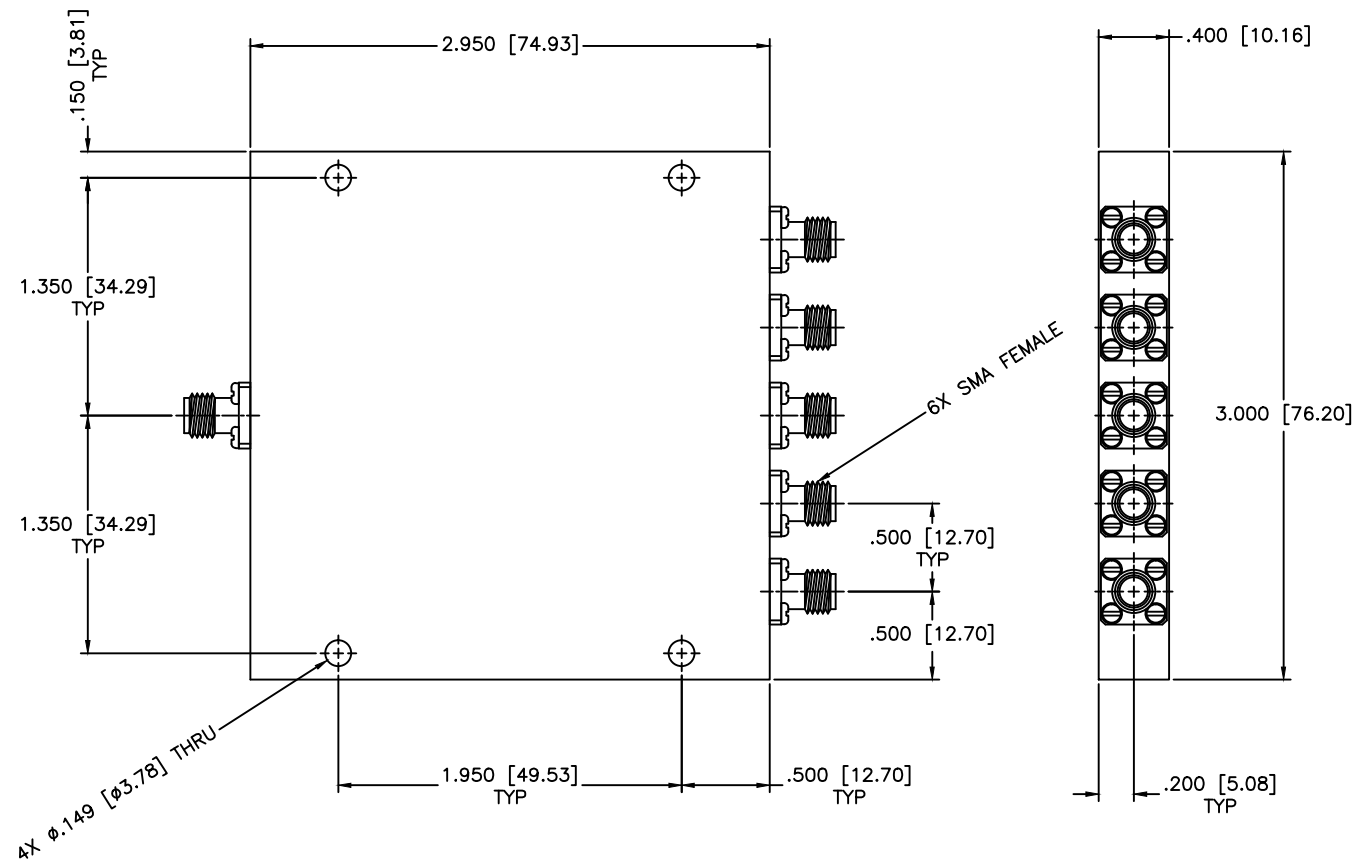

SPECIFICATIONS

Frequency Range: 5.8–6.45 GHz
 Insertion Loss: 2.2dB Max.
 Isolation: 15dB Min.
 VSWR Input/Output: 1.65:1 Max.
 Amplitude Balance: ± 1.5 dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:			
		5-WAY POWER DIVIDER			
PART NO.		PS5-20			
CAGE CODE:	SIZE:	REV:	DWG NO.		
0D2L5	A	A	82857		
DO NOT SCALE THE DRAWING					

DRAWN: Paiboon Luekhamhan	DATE: 07-12-2007
APPROVED: T. Nguyen	DATE: 07-12-2007

PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)
THIRD ANGLE PROJECTION