


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

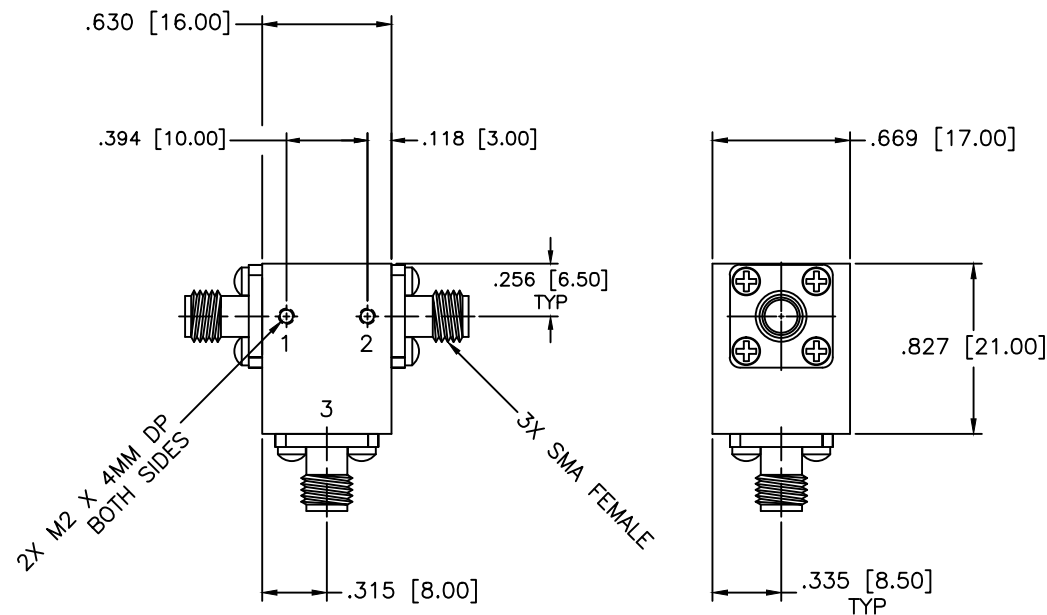

SPECIFICATIONS

Frequency Range: 6–13 GHz
Isolation: 15dB Min.
Insertion Loss: 0.7dB Max.
VSWR: 1.45:1 Max.
Power Average: 25 Watts
Operating Temperature: –10°C to +60°C

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL CIRCULATOR			
		PART NO. CS-199			
DRAWN: Paiboon Luekhamhan		DATE: 10-23-2014		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 10-23-2014		SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	
		THIRD ANGLE PROJECTION 		DWG NO.: 86546	