


EB15E2 Series

- Crystal Clock Oscillators
- LVCMOS Output
- +2.5V Supply Voltage
- Tri-State Output Function
- 4 Pad Ceramic SMD Package
- Low Stand-by Current
- RoHS Compliant (Pb-Free)



ECLIPTEK
CORPORATION

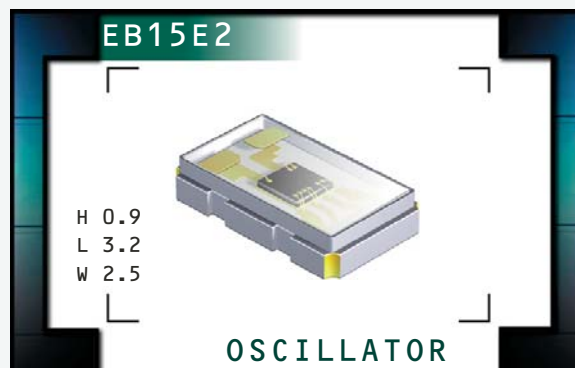

ELECTRICAL SPECIFICATIONS

Frequency Range (MHz)	1.8463, 2.000, 2.048, 2.4576, 3.6864, 4.000, 4.800, 5.000, 6.000, 7.040, 7.159, 7.3728, 8.000, 8.192, 10.000, 11.0592, 12.000, 12.288, 13.000, 13.1072, 13.500, 14.3181, 14.31818, 14.7456, 15.000, 16.000, 16.384, 16.6666, 16.66667, 16.6667, 18.000, 18.432, 19.200, 19.440, 19.6608, 20.000, 22.1184, 22.400, 24.000, 24.5454, 24.576, 25.000, 26.000, 26.2144, 26.973, 27.000, 28.375, 28.63636, 28.636363, 29.4912, 29.500, 30.000, 32.000, 32.768, 33.000, 33.200, 33.330, 33.333, 33.3333, 36.000, 38.400, 40.000, 40.0908, 48.000, 49.0908, 49.152, 50.000, 54.000, or 100.000MHz
------------------------------	--

Operating Temperature Range (OTR)	-20°C to +70°C -40°C to +85°C
--	----------------------------------

Storage Temperature Range (STR)	-55°C to +125°C
--	-----------------

Supply Voltage (V_{DD})	2.5V _{DC} ±5%
---	------------------------

Input Current (I_{DD})	1.8463MHz to 9.999MHz 10.000MHz to 19.999MHz 20.000MHz to 39.999MHz 40.000MHz to 50.000MHz 50.001MHz to 54.000MHz 100.000MHz	3mA Maximum 4mA Maximum 5mA Maximum 6mA Maximum 7mA Maximum 12mA Maximum
--	---	---

Frequency Tolerance/Stability	Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, First Year Aging at 25°C, Shock, and Vibration	±100ppm Maximum ±50ppm Maximum ±25ppm Maximum
--------------------------------------	--	---

Output Voltage Logic High (V_{OH})	90% of V_{DD} Minimum ($I_{OH} = -4mA$)
--	---

Output Voltage Logic Low (V_{OL})	10% of V_{DD} Maximum ($I_{OL} = +4mA$)
---	---

Rise Time / Fall Time (T_R/T_F)	20% to 80% of Waveform, 1.8463MHz to 24MHz 20% to 80% of Waveform, 24.001MHz to 50MHz 20% to 80% of Waveform, 50.001MHz to 100MHz	5nSeconds Maximum 4nSeconds Maximum 3nSeconds Maximum
---	---	---

Duty Cycle (SYM)	at 50% of Waveform	50 ±5(%)
-------------------------	--------------------	----------

Load Drive Capability (C_{LOAD})	15pF Maximum
--	--------------

Tri-State Input Voltage	No Connection $V_{IH} \geq 80\%$ of V_{DD} $V_{IL} \leq 20\%$ of V_{DD}	Enables Output Enables Output Disables Output: High Impedance
--------------------------------	---	---

Standby Current	Disabled Output: High Impedance	10µA Maximum
------------------------	---------------------------------	--------------

Start Up Time (T_S)		10 mSeconds Maximum
---	--	---------------------

RMS Phase Jitter	$F_J = 12kHz$ to 20MHz	1 pSeconds Maximum
-------------------------	------------------------	--------------------

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
EB15E2

PACKAGE
CERAMIC

VOLTAGE
2.5V

CLASS
OS4Z

REV. DATE
10/10

PART NUMBERING GUIDE

EB15E2 E 2 H - 40.000M TR

FREQUENCY TOLERANCE / STABILITY

C = ± 100 ppm Maximum over -20°C to $+70^{\circ}\text{C}$
 D = ± 50 ppm Maximum over -20°C to $+70^{\circ}\text{C}$
 E = ± 25 ppm Maximum over -20°C to $+70^{\circ}\text{C}$
 G = ± 100 ppm Maximum over -40°C to $+85^{\circ}\text{C}$
 H = ± 50 ppm Maximum over -40°C to $+85^{\circ}\text{C}$
 J = ± 25 ppm Maximum over -40°C to $+85^{\circ}\text{C}$

PACKAGING OPTIONS

Blank = Bulk, TR = Tape & Reel

FREQUENCY

OUTPUT CONTROL FUNCTION


H = Tri-State

DUTY CYCLE

2 = 50 ± 5 (%)


MECHANICAL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

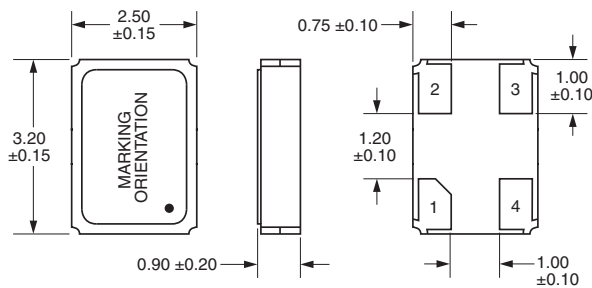



SUGGESTED SOLDER PAD LAYOUT

ALL DIMENSIONS IN MILLIMETERS



TAPE AND REEL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

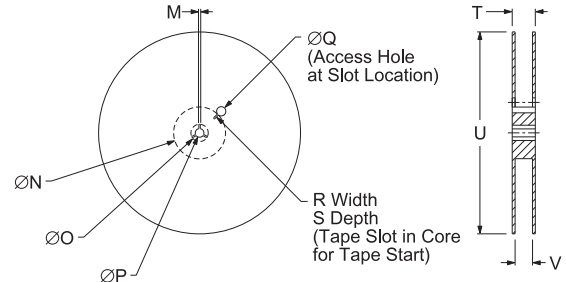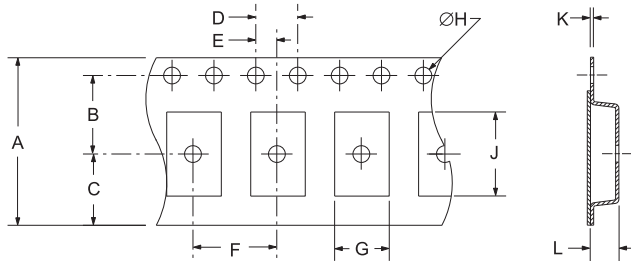

TAPE	A	B	C	D	E
	8.0±0.2	3.5±0.1	2.75±0.1	4.0±0.1	2.0±0.1
F	G	H	J	K	L
4.0±0.1	2.7±1	1.55 ±0.5	3.4±1	0.25 ±0.05	1.4±1

REEL	M	N	O	P	Q
	1.5 MIN	50 MIN	20.2 MIN	13.0±0.5	40 MIN
R	S	T	U	V	QTY/REEL
2.5 MIN	10 MIN	14.4 MAX	180 MAX	8.4+1.5-0	1,000

*Compliant to EIA 481A

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

PARAMETER	Specification
ESD Susceptibility	MIL-STD-883, Method 3015, Class 1, HBM: 1500V
Fine Leak Test	MIL-STD-883, Method 1014, Condition A
Flammability	UL94-V0
Gross Leak Test	MIL-STD-883, Method 1014, Condition C
Mechanical Shock	MIL-STD-883, Method 2002, Condition B
Moisture Resistance	MIL-STD-883, Method 1004
Moisture Sensitivity	J-STD-020, MSL 1
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K
Resistance to Solvents	MIL-STD-202, Method 215
Solderability	MIL-STD-883, Method 2003
Temperature Cycling	MIL-STD-883, Method 1010, Condition B
Vibration	MIL-STD-883, Method 2007, Condition A

MARKING SPECIFICATIONS

Line 1: E XX.X
 Frequency in MHz (3 Digits Maximum + Decimal)

Line 2: XX Y ZZ
 Week of Year
 Last Digit of Year
 Eclipsetek Manufacturing Identifier

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EB15E2	CERAMIC	2.5V	054Z	10/10