


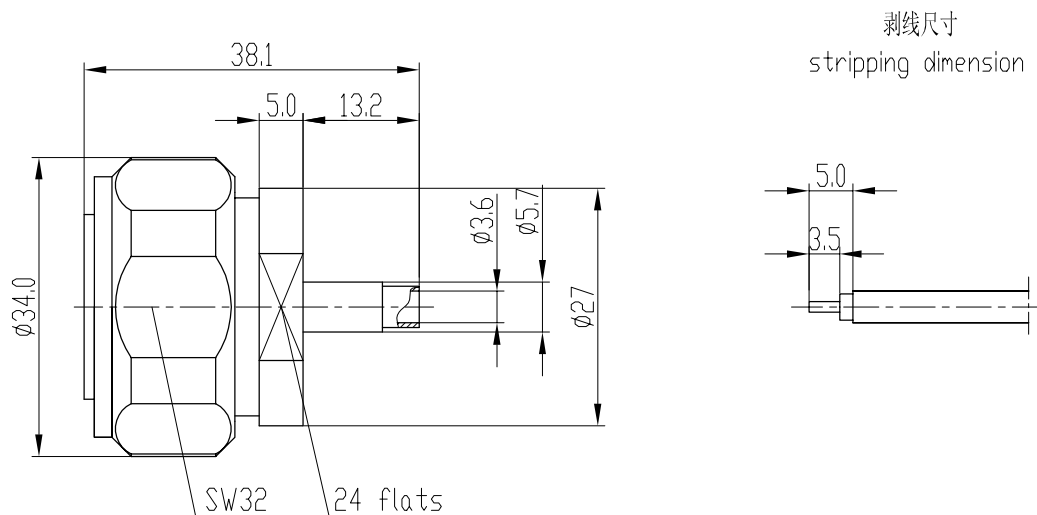

产品型号 type	配接电缆 cable type
L29-JB3	SFT-50-3-1、RG402/U

Electrical Characteristics:

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~7.5GHz
3. Contact resistance
Center conductor: $\leq 1.0\ m\Omega$
Out conductor: $\leq 0.5\ m\Omega$
4. Insulation resistance: $\geq 10000M\Omega$
5. Insulator withstanding: 4000V
6. VSWR: ≤ 1.5
7. Durability: 500cycles

主要性能指标:

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~7.5GHz
3. 接触电阻:
中心导体: $\leq 1.0\ m\Omega$
外导体: $\leq 0.5\ m\Omega$
4. 绝缘电阻: $\geq 10000M\Omega$
5. 介质耐压: 4000V
6. 电压驻波比: ≤ 1.5
7. 插拔次数: 500次

Application: IEC 60169-4


执行标准: IEC 60169-4

Material & Finishing

1. Center contact :
Male: brass, silver plated
2. Bodies: brass, silver plated
3. Insulators: PTFE
4. Gasket: silicone rubber

材料和镀层

1. 中心接触件:
插针: 黄铜, 镀银
2. 壳体: 黄铜, 镀银
3. 绝缘子: 聚四氟乙烯
4. 密封圈: 硅橡胶

		SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		1.5:1		
	NAME	DATE	L29-JB3 RF COAXIAL CONNECTOR 西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
DRAWN				
CHECKED				
APPROVED				