



Standards
NF C 96-315
MIL-DTL-39030

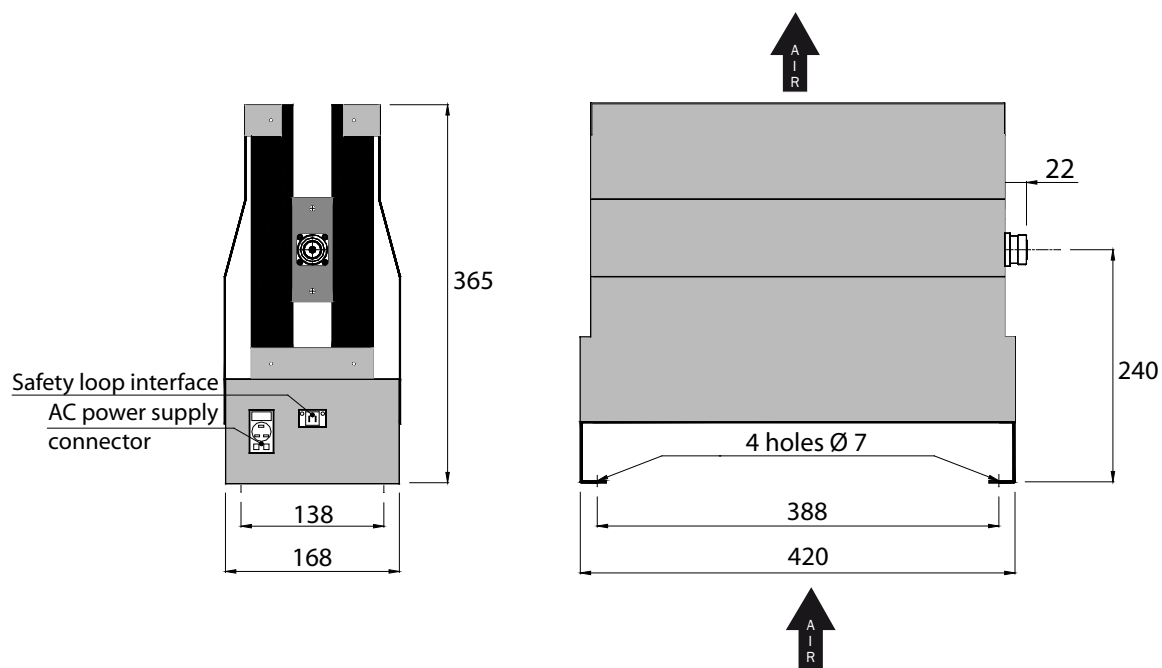

Impedance	$50 \Omega \pm 5\%$
Frequency	DC - 1 GHz
Max VSWR	≤ 1.10 at 1 GHz
Temperature range	-25 to +55°C
Average power @ 25°C	2 kW
Cooling	Forced air
Weight	22 kg



Dimensions in mm

P/N	Connector
17-0557	7-16 f

others connectors on request