



BNC Twinax Jack Connector Solder Attachment Thru Hole PCB, .687 inch x .500 inch Hole Spacing

TECHNICAL DATA SHEET

PE44115

BNC Twinax Jack Connector Solder Attachment Thru Hole PCB, .687 inch x .500 inch Hole Spacing

Configuration

Connector	BNC Twinax Jack
Connector Interface Type	Thru Hole
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight

Electrical Specifications

Impedance, Ohms	78
-----------------	----

Mechanical Specifications

Size

Length, in [mm]	0.84 [21.34]
Width/Dia., in [mm]	0.687 [17]
Height, in [mm]	0.687 [17.45]
Weight, lbs [g]	0.027 [12.25]

Connector

Type	BNC Twinax Jack
Contact Material and Plating	Silver
Body Material and Plating	Brass, Nickel
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------

BNC Twinax Jack Connector Solder Attachment Thru Hole PCB, .687 inch x .500 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Jack Connector Solder Attachment Thru Hole PCB, .687 inch x .500 inch Hole Spacing PE44115](http://www.pasternack.com/bnc-twinax-jack-standard-thru-hole-pcb-connector-pe44115-p.aspx)

URL: <http://www.pasternack.com/bnc-twinax-jack-standard-thru-hole-pcb-connector-pe44115-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE44115 CAD Drawing

BNC Twinax Jack Connector Solder Attachment Thru Hole
PCB, .687 inch x .500 inch Hole Spacing

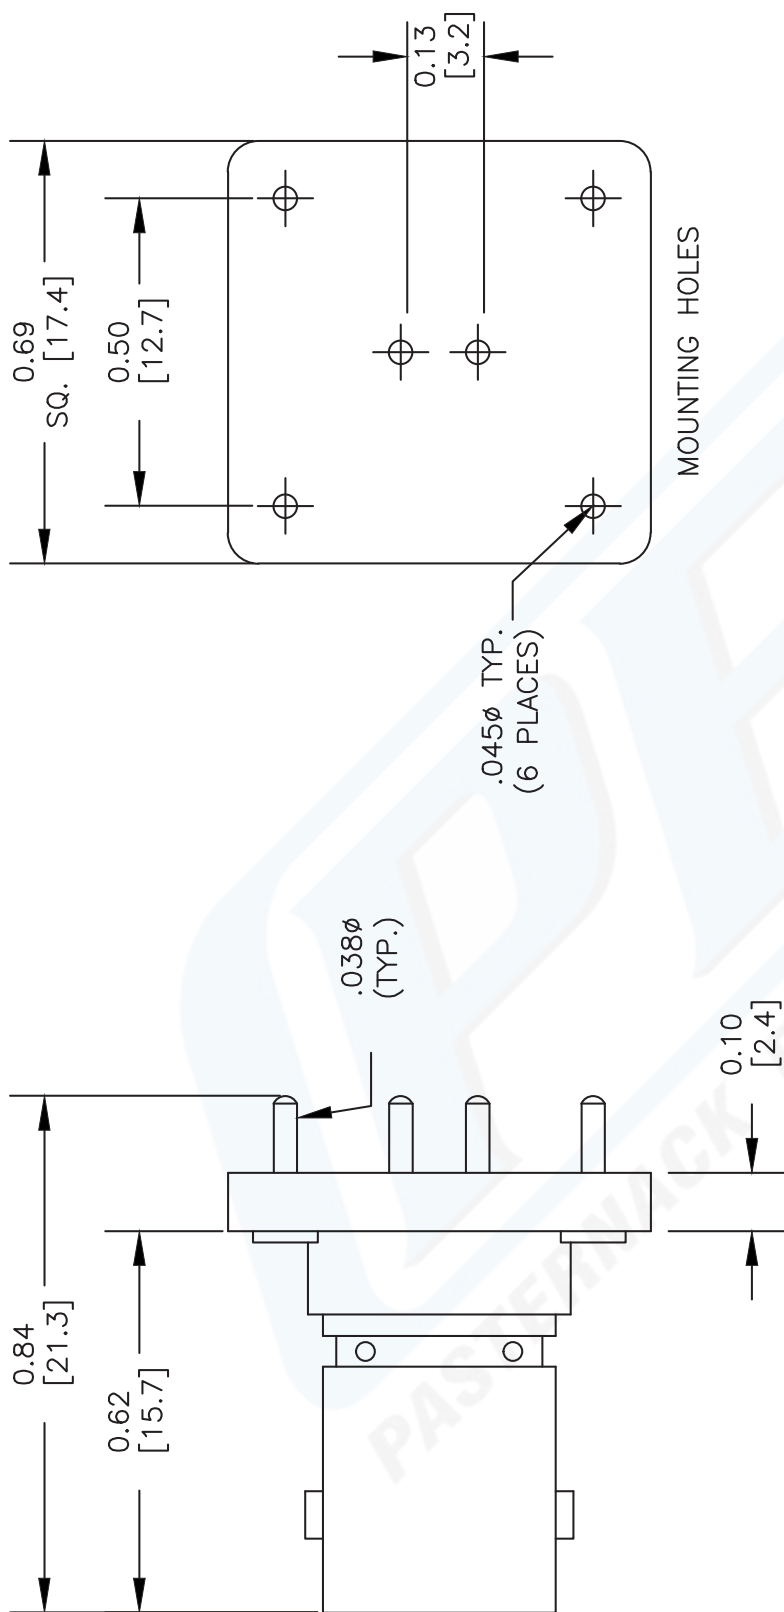

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE44115

FSCM NO. 53919

2233

P**ASTERNACK**[®]
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com