



Typical Characteristics For P2T-6G18G-40-R-570-TFF-1D6KW

PMI MODEL P2T-6G18G-40-R-570-TFF-1D6KW IS A 6.0 GHz TO 18.0 GHz SINGLE-POLE, DOUBLE THROW SOLID-STATE SWITCH CAPABLE OF HANDLING INPUT POWER LEVELS UP TO 1.6kW PEAK HAVING A DUTY CYCLE OF 8% AND A PULSE WIDTH OF 250 us. THIS SWITCH OFFERS LOW LOSS OF 2.2 dB MAXIMUM AND 40 dB OF ISOLATION WITH A SWITCHING SPEED OF 200 ns MAXIMUM. DC OPERATING VOLTAGES ARE +5VDC & -70VDC. THE HOUSING IS HERMETICALLY SEALED, MEASURES 2.0" x 2.0" x 0.75" AND IS SUPPLIED WITH TNC FEMALE CONNECTORS.



Revised on June 12, 2015
Designed by: Kevin Mason & Chuck Newton
Reported by: Kevin Mason



Typical Characteristics For P2T-6G18G-40-R-570-TFF-1D6KW

Table of Contents

1. Product Feature Drawing.....	Page 3
2. Summary Data, 6-18 GHz.....	Page 4
3. Insertion Loss and Return Loss Plots, 6-18 GHz.....	Page 5
4. Isolation Plots, 6-18 GHz.....	Page 6
5. Broadband Insertion Loss and Return Loss Plots, 2-22GHz (REFERENCE ONLY)	
a. J1-J2 Insertion Loss and Return Loss.....	Page 7
b. J1-J3 Insertion Loss and Return Loss.....	Page 8
6. Broadband Isolation Plots, 2-22 GHz (REFERENCE ONLY)	
a. J1-J2 Isolation.....	Page 9
b. J1-J3 Isolation.....	Page 10
7. Switching Speed	
a. Switching Speed Off and Fall Time.....	Page 11
b. Switching Speed On and Rise Time.....	Page 12
8. High Power CW Testing, 6 GHz	
a. High Power CW Output Power Vs. Input Power Graph... ..	Page 13
b. High Power CW Output Power Vs. Input Power Table.....	Page 14



Typical Characteristics For P2T-6G18G-40-R-570-TFF-1D6KW

Product Feature Drawing

DESCRIPTION

PMI MODEL P2T-6G18G-40-R-570-TFF-1D6KW IS A REFLECTIVE 1.6 KILOWATT HIGH-POWER COLD SWITCHING SINGLE POLE DOUBLE THROW SWITCH OPERATING IN THE 6-18 GHz FREQUENCY RANGE.

SPECIFICATIONS

- FREQUENCY RANGE: 6-18 GHz
- POWER: 1.6kW PEAK
- DUTY CYCLE: 8%
- INSERTION LOSS: 2.2dB MAX. AT BAND EDGES FOR 20% BANDWIDTH AND TYPICALLY 1.75 dB GOAL FOR MID-BAND OF 80% OF THE BANDWIDTH 2.0 dB MAX., AND TYPICALLY 1.5dB GOAL.
- ISOLATION: 40dB
- PULSE WIDTH: 250 μ SEC MAX.
- SWITCHING SPEED: 200 nS MAX. (50% TTL TO 90% RF & 50% TTL TO 10% RF).
- VSWR IN/OUT: 2:1 MAX.
- LOAD VSWR: BETTER THAN 1.5:1
- DC VOLTAGE & CURRENT: +5V @ 300mA AND -70V @ 60mA
- CONTROL: SINGLE TTL (TTL "0" J1-J3 " LOW LOSS)
- CONNECTOR FOR RF PORT: TNC FEMALE
- CONNECTOR FOR CONTROL: 9 PIN MICRO D TYPE FEMALE, MATING WITH M83513/03A/03C (SEE CONNECTION TABLE BELOW)
- SIZE (NOT INCL. CONNECTORS): (L) 2.00" X (W) 2.00" X (H) 0.75"
- FINISH: PAINTED BLUE - NO PAINT ON MOUNTING SURFACE
- J4 CONNECTIONS

J4 PIN	CONNECT TO
1	U1 -70V
2	GROUND
3	U1 CONTROL
4	U1 +5V
5	U1 NC
6	U1 GROUND
7	U1 GROUND
8	U1 GROUND
9	U1 GROUND

ENVIRONMENTAL RATINGS


- TEMPERATURE: -40°C TO +85°C
- ENVIRONMENTAL: MIL-STD-810E
- EMI/EMC: MIL-STD-461

NOTE: SPECIFICATIONS WILL VARY DIVER OPERATING TEMPERATURE.
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XXX .0010
X.XXXX .0010

REVISIONS			
ZONE	REV	DESCRIPTION	DATE
1		ORIGINAL RELEASE	12/17/18
A1		ECN # 15-0070	06/11/19

MECHANICAL OUTLINE

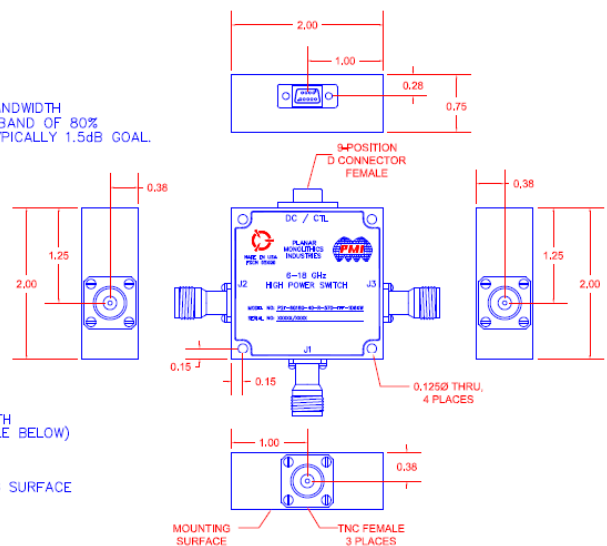

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE	
DESIGN	NJA	12/17/18		PRODUCT FEATURE	
CHECKED				P2T-6G18G-40-R-570-TFF-1D6KW	
ISSUED					
SCALE: N:S		SHEET 1 OF 1			



Typical Characteristics For P2T-6G18G-40-R-570-TFF-1D6KW


Summary Data Sheet

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	6.0 to 18.0 GHz	6.0 to 18.0 GHz	
2	Input Power:	1.6KW Peak 8% Duty Cycle 250 μ Sec. Max. Pulse Width	Tested to 130 Watts CW (See Plot)	
3	Insertion Loss:	2.2dB Max. at band edges for 20% bandwidth and typically 1.75 dB goal. For mid-band of 80% of the bandwidth 2.0dB Max., and typically 1.5 dB goal	2.04dB Max. 1.0dB Typical (Mid-Band)	
4	Isolation:	40 dB Min.	40 dB	
5	Switching Speed:	200 ns Max. (50% TTL to 90% RF and 50% TTL to 10% RF)	165 ns "On" 95 ns "Off"	
6	Logic Control	TTL "1" = J1-J2 "Low Loss" TTL "0" = J1-J3 "Low Loss"	Pass	
7	VSWR In / Out:	2.0:1 Max.	1.99:1	
8	Power Supply:	+5V @ 300 mA Max. -70V @ 60 mA Max.	265 mA 1 mA	




Typical Characteristics For P2T-6G18G-40-R-570-TFF-1D6KW

J1 – J2 Insertion Loss and Return Loss

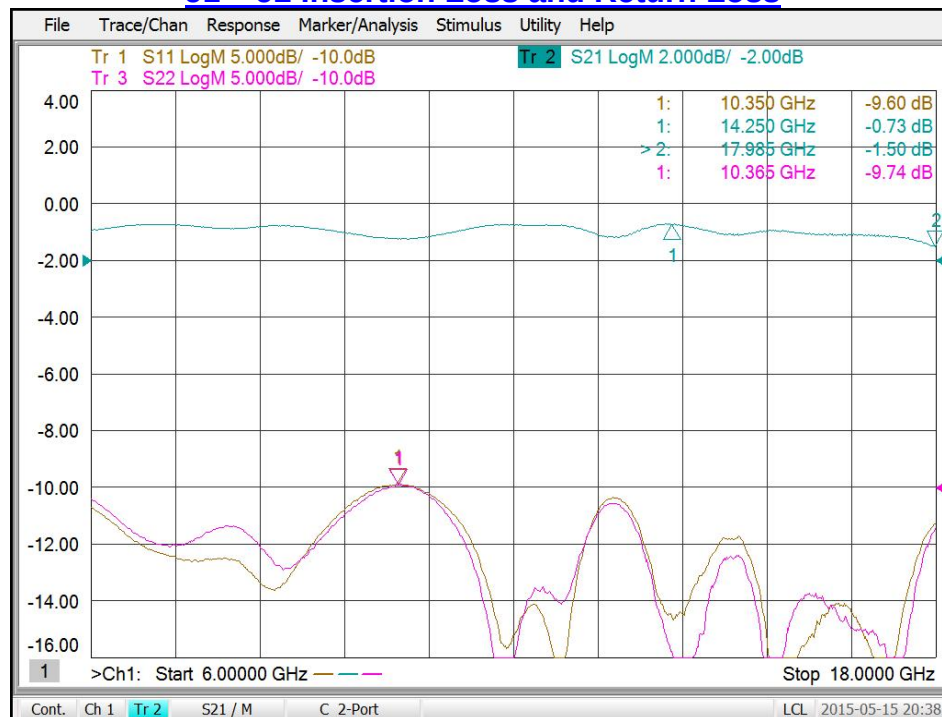


J1 – J3 Insertion Loss and Return Loss

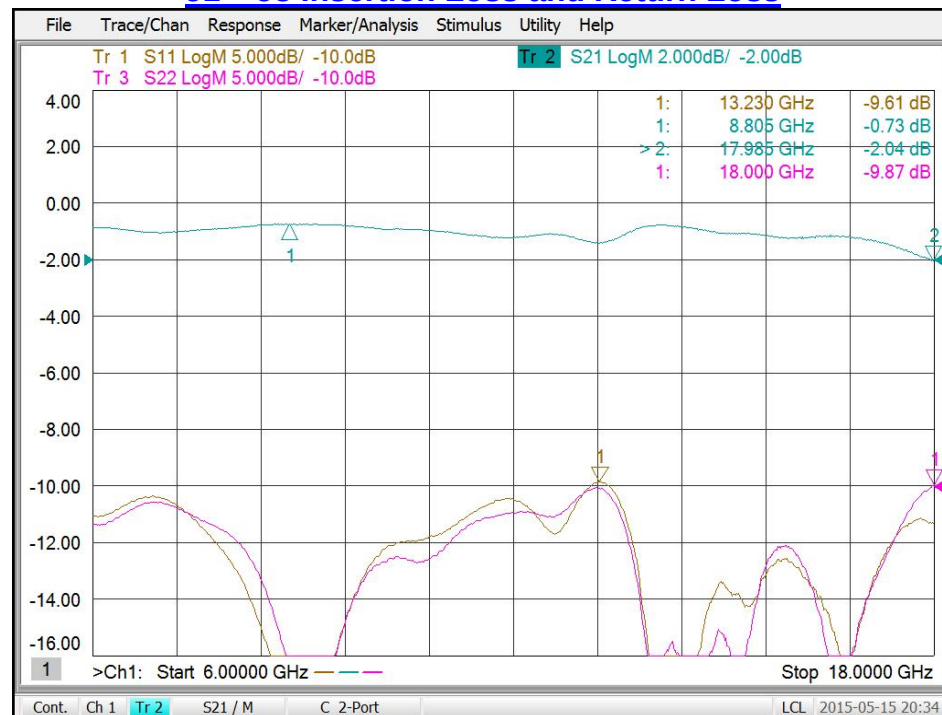




Typical Characteristics For P2T-6G18G-40-R-570-TFF-1D6KW

J1 to J2 Isolation Plot
(J1 to J3 = "Low Loss State")

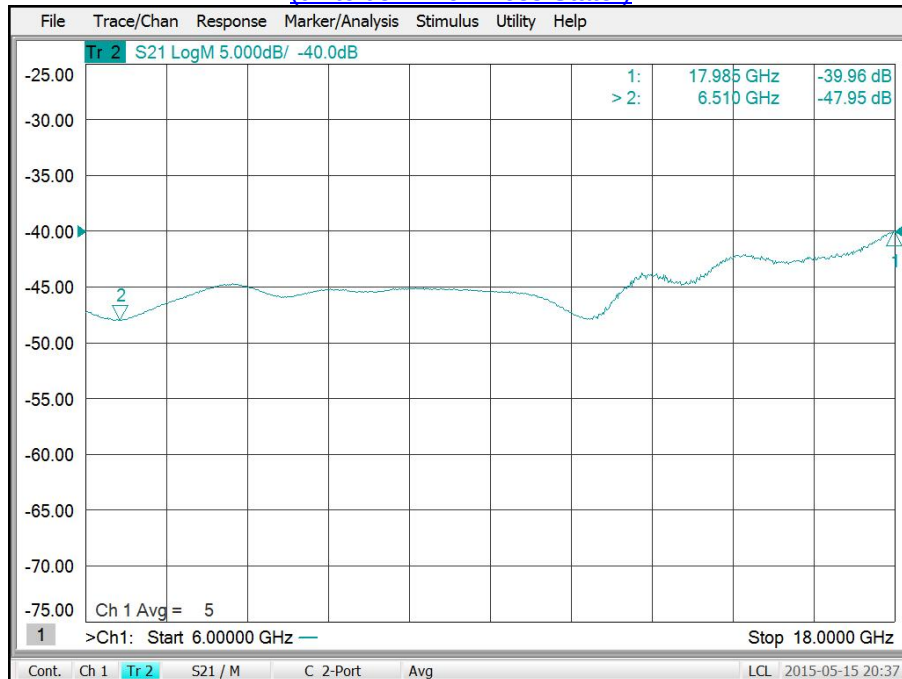


J1 to J3 Isolation Plot
(J1 to J2 = "Low Loss State")

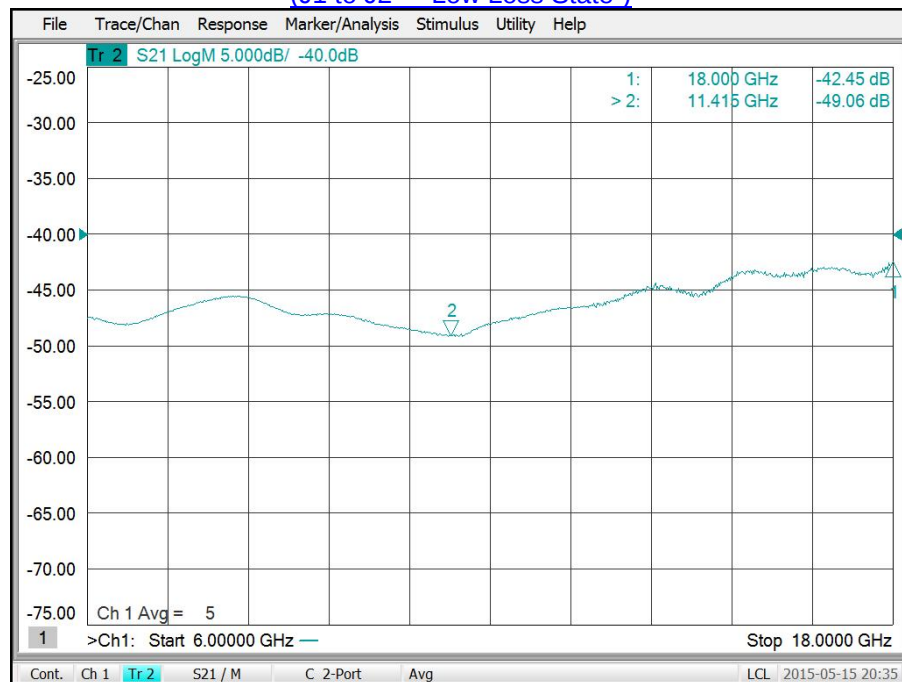



Typical Characteristics **For** **P2T-6G18G-40-R-570-TFF-1D6KW**

J1-J2 Broadband Insertion Loss and VSWR Plot, 2-22 GHz

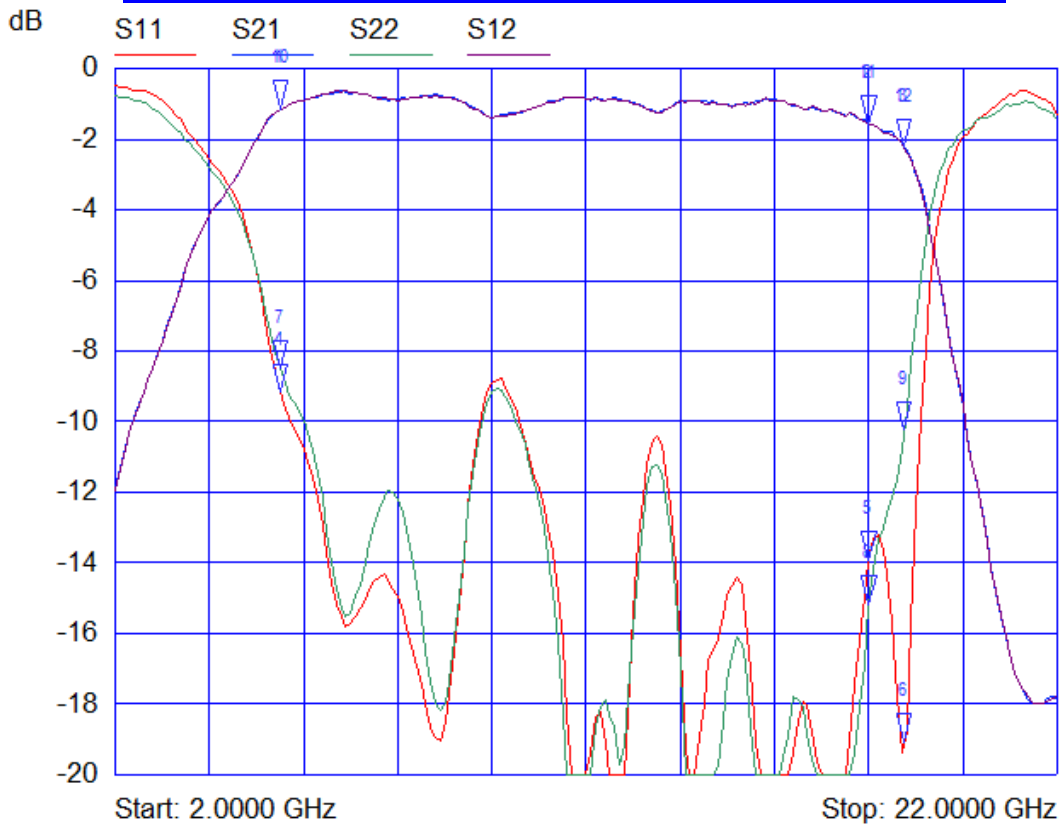


Mkr	Trace	X-Axis	Value	Notes
1 ▽	S21	5.5000 GHz	-1.13 dB	
2 ▽	S21	18.0000 GHz	-1.57 dB	
3 ▽	S21	18.7500 GHz	-2.22 dB	
4 ▽	S11	5.5000 GHz	-9.18 dB	
5 ▽	S11	18.0000 GHz	-13.93 dB	
6 ▽	S11	18.7500 GHz	-19.07 dB	
7 ▽	S22	5.5000 GHz	-8.49 dB	
8 ▽	S22	18.0000 GHz	-15.17 dB	
9 ▽	S22	18.7500 GHz	-10.24 dB	
10 ▽	S12	5.5000 GHz	-1.14 dB	
11 ▽	S12	18.0000 GHz	-1.56 dB	
12 ▽	S12	18.7500 GHz	-2.26 dB	



Typical Characteristics **For** **P2T-6G18G-40-R-570-TFF-1D6KW**

J1-J3 Broadband Insertion Loss and VSWR Plot, 2-22 GHz

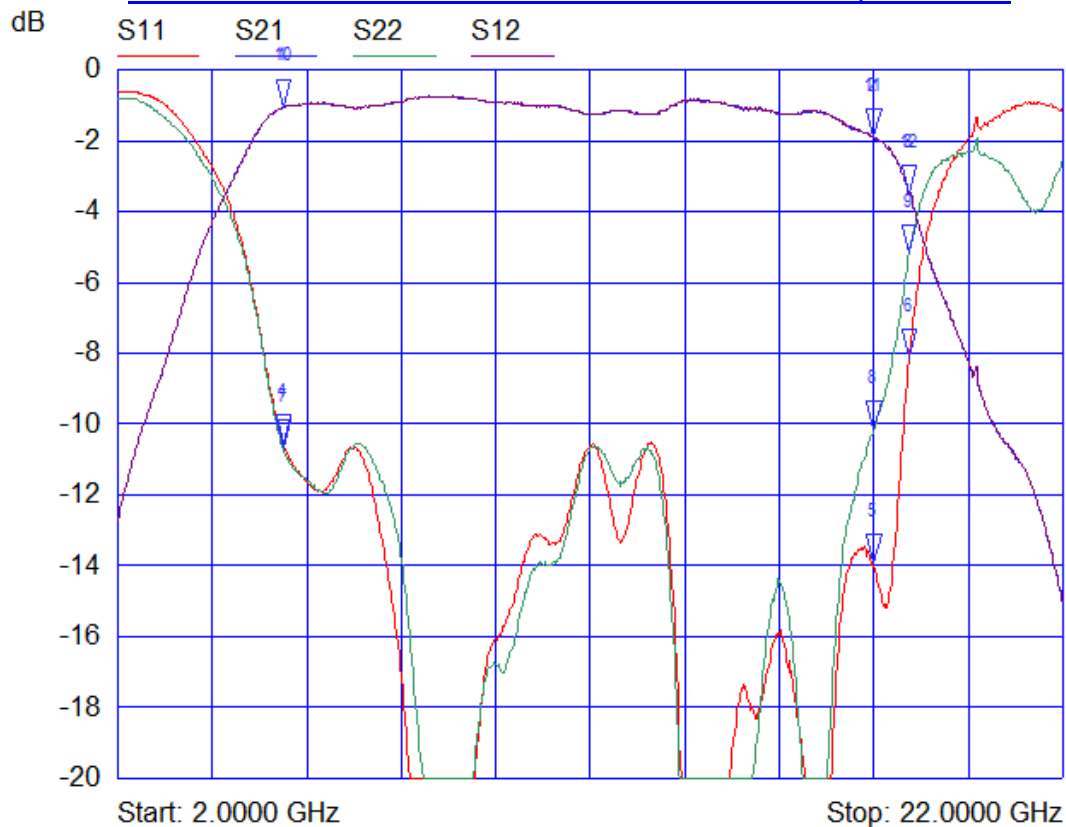


Mkr	Trace	X-Axis	Value	Notes
1 ▽	S21	5.5000 GHz	-1.07 dB	
2 ▽	S21	18.0000 GHz	-1.89 dB	
3 ▽	S21	18.7500 GHz	-3.50 dB	
4 ▽	S11	5.5000 GHz	-10.55 dB	
5 ▽	S11	18.0000 GHz	-13.92 dB	
6 ▽	S11	18.7500 GHz	-8.12 dB	
7 ▽	S22	5.5000 GHz	-10.70 dB	
8 ▽	S22	18.0000 GHz	-10.16 dB	
9 ▽	S22	18.7500 GHz	-5.17 dB	
10 ▽	S12	5.5000 GHz	-1.07 dB	
11 ▽	S12	18.0000 GHz	-1.90 dB	
12 ▽	S12	18.7500 GHz	-3.50 dB	



Typical Characteristics **For** **P2T-6G18G-40-R-570-TFF-1D6KW**

J1-J2 Broadband Isolation Plot, 2-22 GHz

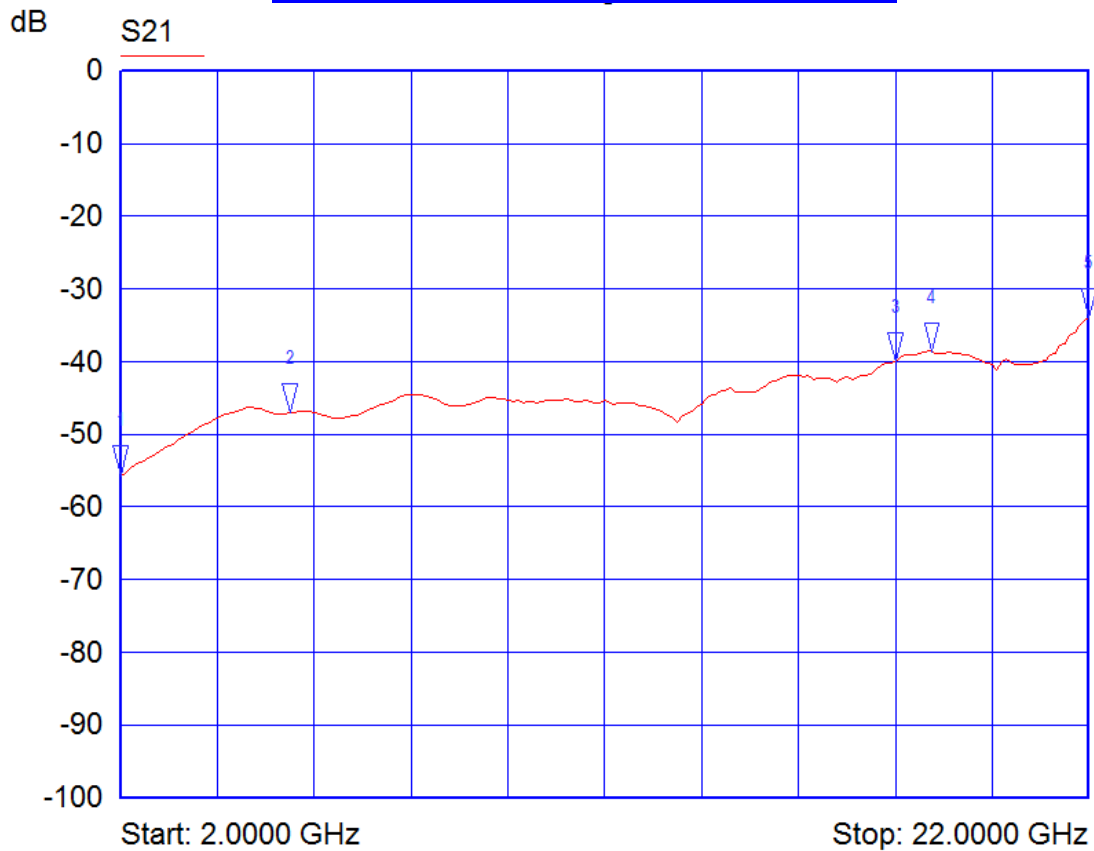


Mkr	Trace	X-Axis	Value	Notes
1 ▽	S21	2.0000 GHz	-55.73 dB	
2 ▽	S21	5.5000 GHz	-47.05 dB	
3 ▽	S21	18.0000 GHz	-40.02 dB	
4 ▽	S21	18.7500 GHz	-38.66 dB	
5 ▽	S21	22.0000 GHz	-33.97 dB	



Typical Characteristics For P2T-6G18G-40-R-570-TFF-1D6KW

J1-J3 Broadband Isolation Plot, 2-22 GHz

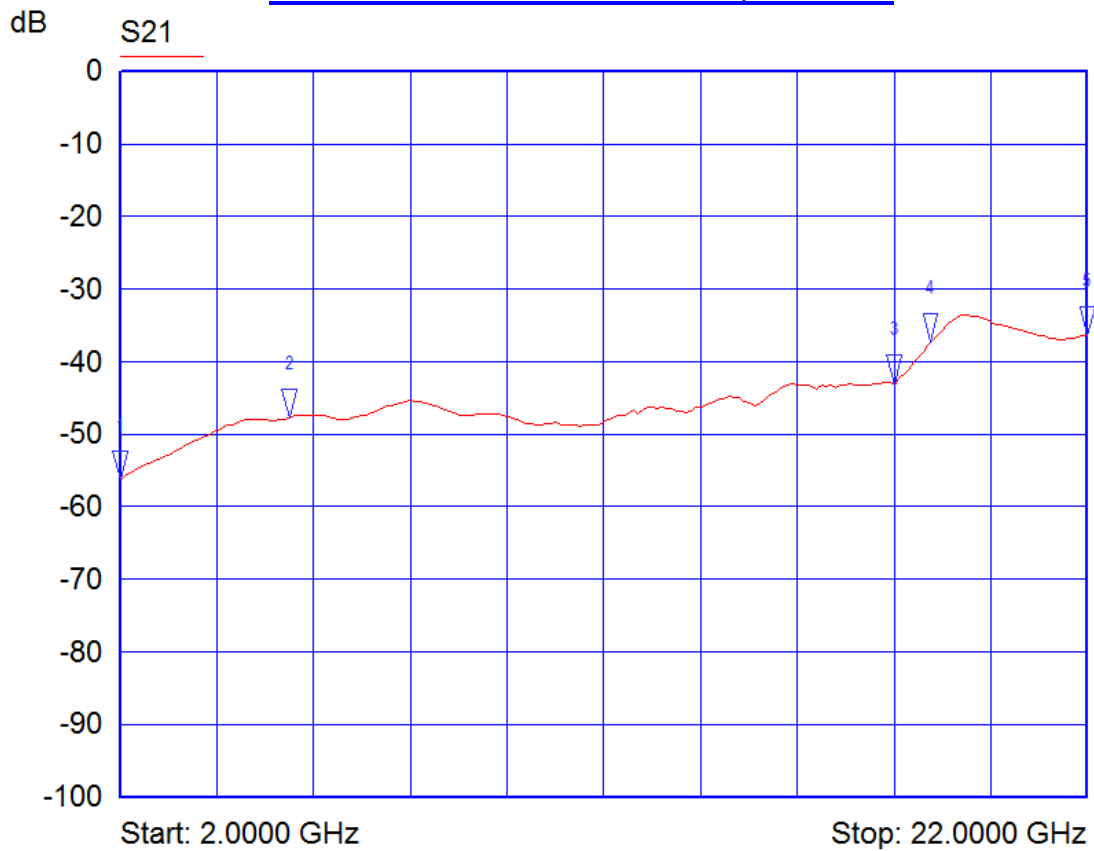


Mkr	Trace	X-Axis	Value	Notes
1 ▽	S21	2.0000 GHz	-56.25 dB	
2 ▽	S21	5.5000 GHz	-47.80 dB	
3 ▽	S21	18.0000 GHz	-43.25 dB	
4 ▽	S21	18.7500 GHz	-37.35 dB	
5 ▽	S21	22.0000 GHz	-36.53 dB	



Typical Characteristics For P2T-6G18G-40-R-570-TFF-1D6KW

Switching Speed Off and Fall Time

50 ns per Division

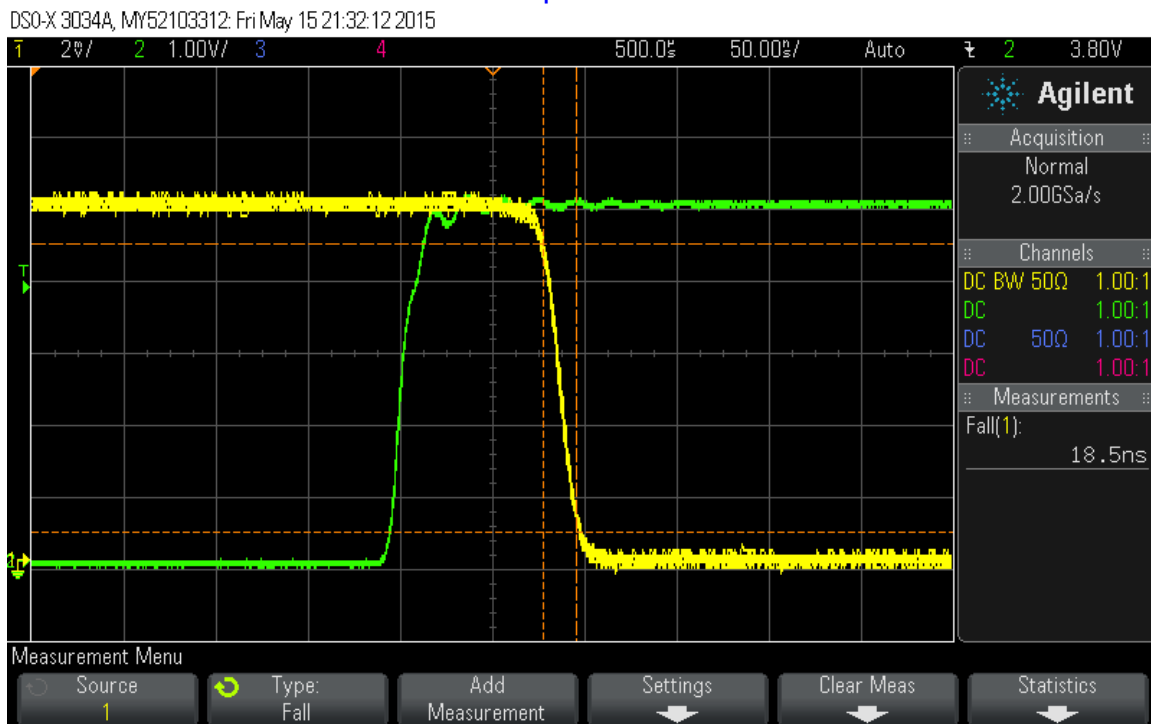

Yellow Trace: RF Signal
Green Trace: TTL Signal

Measured Values:


Fall Time (90% RF to 10% RF) = 18.5 ns
Switching Speed Off (50% TTL to 10% RF) = 95 ns



Typical Characteristics For P2T-6G18G-40-R-570-TFF-1D6KW

Switching Speed On and Rise Time

50 ns per Division

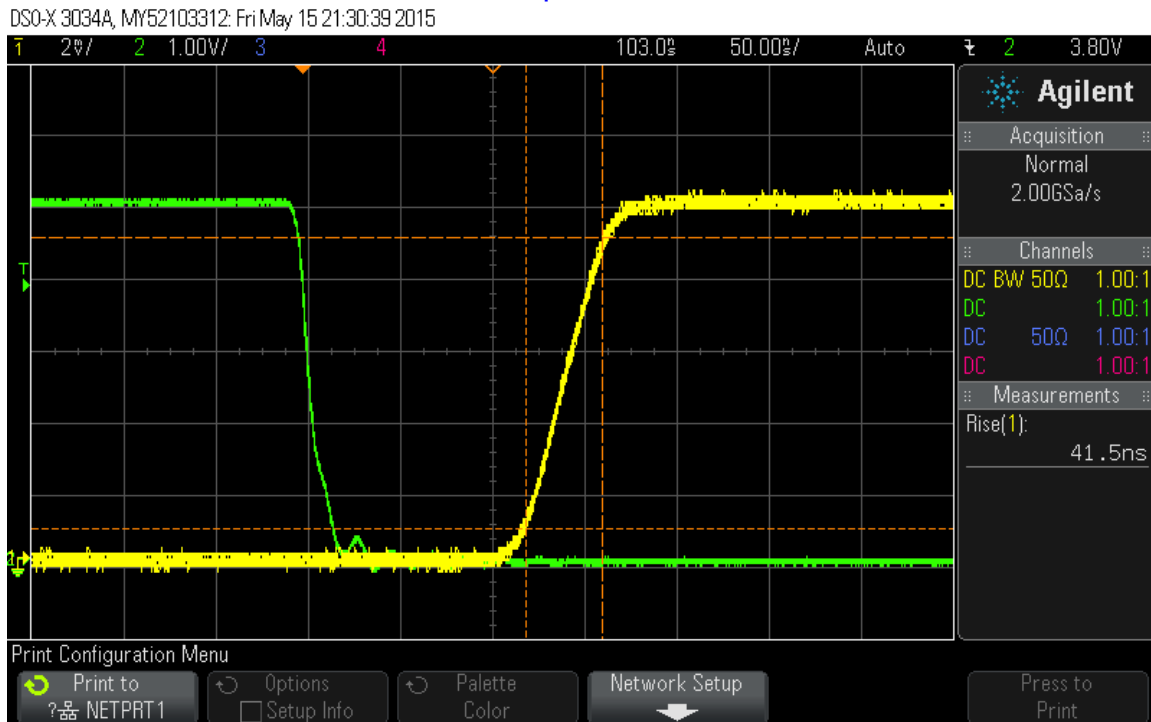

Yellow Trace: RF Signal
Green Trace: TTL Signal

Measured Values:

Rise Time (10% RF to 90% RF) = 41.5 ns
Switching Speed On (50% TTL to 90% RF) = 165 ns




Typical Characteristics For P2T-6G18G-40-R-570-TFF-1D6KW

High Power CW Output Power Vs. Input Power Graph

Frequency = 6 GHz

Output Power vs. Input Power at 6GHz

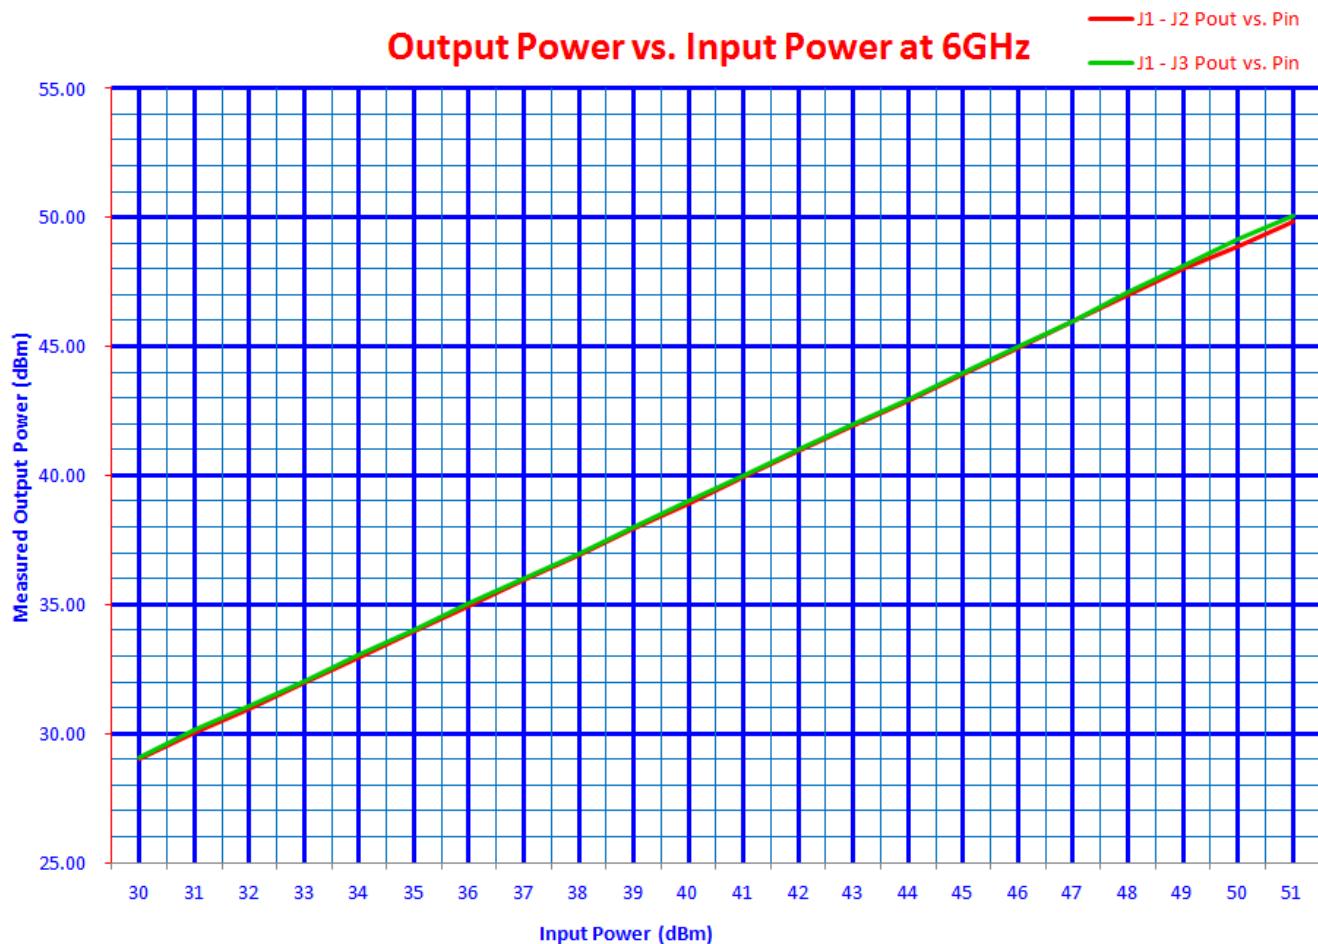



Typical Characteristics For P2T-6G18G-40-R-570-TFF-1D6KW

High Power CW Output Power Vs. Input Power Table
Frequency = 6 GHz

Input Power to Switch (dBm)	Input Power to Switch (W)	Output Power of Switch (J1 - J2) (dBm)	Output Power of Switch (J1 - J2) (W)	Switch Loss (J1 - J2) (dB)	Output Power of Switch (J1 - J3) (dBm)	Output Power of Switch (J1 - J3) (W)	Switch Loss (J1 - J3) (dB)
30	1.000	29.00	0.794	-1.00	29.05	0.804	-0.95
31	1.259	30.04	1.009	-0.96	30.14	1.033	-0.86
32	1.585	30.96	1.247	-1.04	31.08	1.282	-0.92
33	1.995	31.95	1.567	-1.05	32.05	1.603	-0.95
34	2.512	32.93	1.963	-1.07	33.03	2.009	-0.97
35	3.162	33.94	2.477	-1.06	34.03	2.529	-0.97
36	3.981	34.95	3.126	-1.05	35.03	3.184	-0.97
37	5.012	35.95	3.936	-1.05	36.02	3.999	-0.98
38	6.310	36.94	4.943	-1.06	37.00	5.012	-1.00
39	7.943	37.93	6.209	-1.07	38.00	6.310	-1.00
40	10.000	38.92	7.798	-1.08	39.02	7.980	-0.98
41	12.589	39.95	9.886	-1.05	40.00	10.000	-1.00
42	15.849	40.96	12.474	-1.04	41.01	12.618	-0.99
43	19.953	41.94	15.631	-1.06	41.99	15.812	-1.01
44	25.119	42.88	19.409	-1.12	42.93	19.634	-1.07
45	31.623	43.93	24.717	-1.07	43.98	25.003	-1.02
46	39.811	44.95	31.261	-1.05	44.99	31.550	-1.01
47	50.119	45.99	39.719	-1.01	45.99	39.719	-1.01
48	63.096	47.02	50.350	-0.98	47.12	51.523	-0.88
49	79.433	47.99	62.951	-1.01	48.12	64.863	-0.88
50	100.000	48.87	77.090	-1.13	49.13	81.846	-0.87
51	125.893	49.84	96.383	-1.16	50.08	101.859	-0.92
51.2	131.826	50.01	100.231	-1.19	50.21	104.954	-0.99