

MECHANICAL  
 CONTACT: BREAK BEFORE MAKE  
 ACTUATOR: MOMENTARY  
 SWITCHING SPEED: 20 mSEC MAX



ELECTRICAL  
 ACTUATOR VOLTAGE: 28.0 Vdc (22.0–32.0 Vdc)  
 ACTUATOR CURRENT: 0.150 A MAX @ 28.0 Vdc  
 POWER HANDLING: 200 WCW @ 1.0 GHz

ENVIRONMENTAL  
 OPERATING TEMP: -54°C to +90°C  
 SINE VIBRATION: 30 G'S rms  
 LIFE : 1,000,000 CYCLES  
 RANDOM VIBRATION: 20 G'S rms

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATION:

FREQUENCY RANGE (GHz):	DC-2.0	2.0-4.0
VSWR (Max.):	1.20:1	1.25:1
INSERTION LOSS (dB):	0.20	0.25
ISOLATION (dB):	90	80
IMPEDANCE (Ohms):	50	

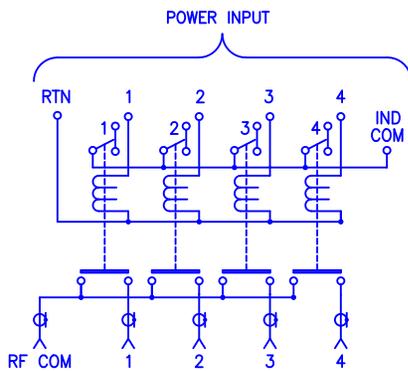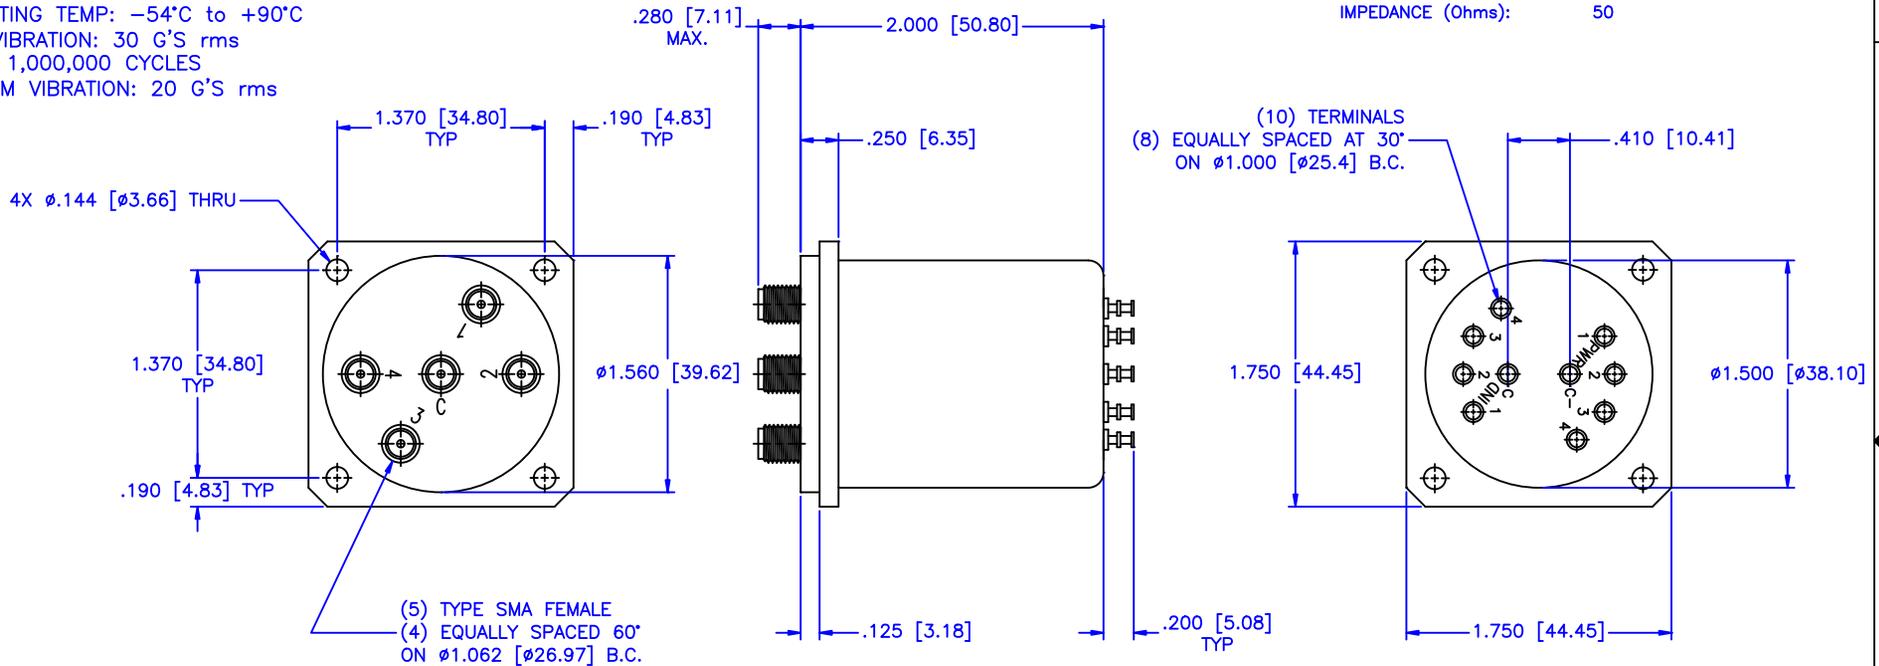

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	SHEET: N/A
DRAWN: Paiboon Luekhamhan	DATE: 03-28-2001	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DRAWING TITLE: ELECTROMECHANICAL SWITCHES
APPROVED: T. Nguyen	DATE: 03-28-2001	THIRD ANGLE PROJECTION 	PART NO. A4-3-MI
		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO. 81612
		DO NOT SCALE THE DRAWING	