

DC BIAS PASSING ATTENUATOR

500 MHz - 2 GHz, 100 Volts

SPECIFICATIONS:

Models: 9093-N-XX, 9093-SMA-XX, 9093-TNC-XX

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical: (@ 25°C Ambient)

Frequency Range _____ 500 MHz - 2 GHz
Standard dB Values* _____ 4, 6, 8, 10, 15, 20dB
Attenuation Accuracy _____ ± 2.0 dB**
Impedance _____ 50 Ohms
DC Resistance*** _____ 0.25 Ohms Max.
(CC IN TO CC OUT)
VSWR _____ 1.35:1 Max.
Voltage Rating _____ 100 Volts Max.
DC Current _____ 2 Amps. Max.
RF Power (Avg) _____ 2 Watts Max.
Operating Temp. Range _____ -55°C to +125°C

**CENTER CONDUCTOR TO CASE DC ISOLATED > 5 MEGAOHMS

Mechanical:

Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper

**dB Values ≤ 15 dB are Typically Within ± 1.0 dB

Model Number: **9093-N-XX**
Type N Connectors


dB Value	Length	Diameter
4, 6, 8, 10, 15	1.76 $\pm$.05 [44.7 $\pm$ 1.3]	$\varnothing$.62 [15.8]
20dB	2.28 $\pm$.05 [57.9 $\pm$ 1.3]	$\varnothing$.56 [14.2]

Model Number: **9093-SMA-XX**
SMA Connectors




dB Value	Length	
	Inches	Millimeters
4, 6, 8, 10, 15	1.21 $\pm$.05	[30.7 $\pm$ 1.3]
20dB	1.57 $\pm$.05	[39.9 $\pm$ 1.3]

Model Number: **9093-TNC-XX**
TNC Connectors

dB Value	Length	
	Inches	Millimeters
4, 6, 8, 10, 15	2.07 $\pm$.05	[52.6 $\pm$ 1.3]
20dB	2.45 $\pm$.05	[62.2 $\pm$ 1.3]



SCHEMATIC DIAGRAM

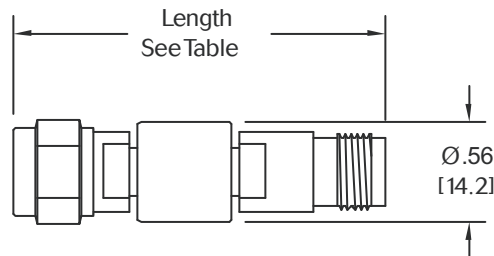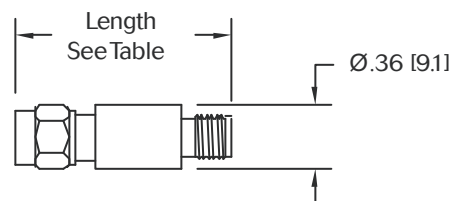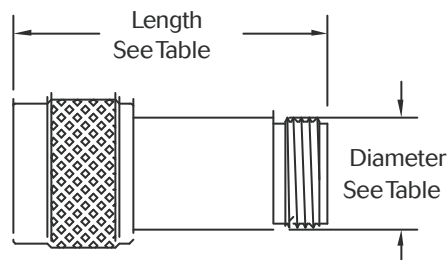

HOW TO ORDER:

Model Number: **9093-yyy-xx**

Connector Type _____ dB Value
N = Type N
SMA = SMA
TNC = TNC

Ordering Examples:

Model Number: **9093-N-10**
10 dB; Type N; Male/Fem

Model Number: **9093-TNC-20**
20 dB; TNC; Male/Fem

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
*Other dB values available for special order.

9093: REVJ

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmet@aeroflex.com