


Uncontrolled Drawing

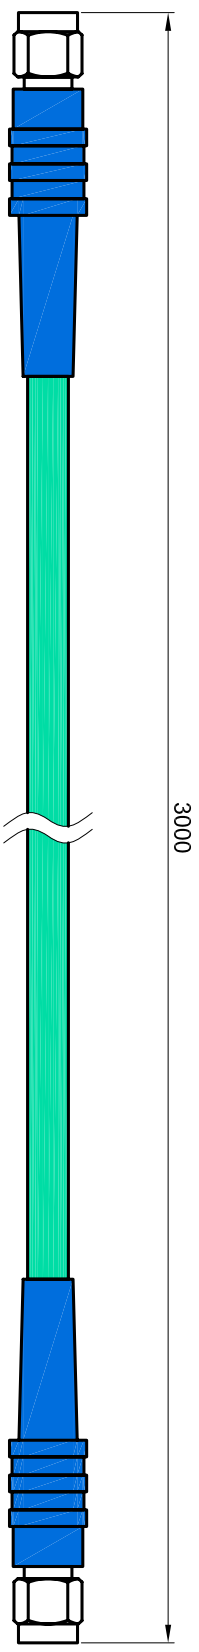

Type SMA male

Type SMA male

Specification:

1. Model: MC06-01-01-3000
2. Nominal Impedance: 50Ω
3. Frequency Range: DC-6GHz, up to 8GHz
4. Insertion Loss: 1.95dB@DC-1GHz, 3.30dB@1-3GHz, 5.40dB@3-6GHz, 6.00dB@6-8GHz
5. VSWR: 1.15@DC-1GHz, 1.20@1-3GHz, 1.25@3-6GHz, 1.30@6-8GHz
6. Length: 3m
7. Connector: SMA male to SMA male
8. Power CW: 166W@6GHz

参量/项目	数量	规格/名称、型号、材料标准等	图号	505.0334							
设计	DESIGNED_ZYY_SJ	校对	CHECKED_ZH	审核 - 日期	APPROVED_	文件名称	FILENAME	日期	10/12/13	图幅	1:1
BXT Technologies						Test Cable Assembly					
RF Technologies						www.bxt-technologies.cn					
Tel:0591-83789500						MC06-01-01-3000					
Edition						SHEET					