




2.5 kW Forced air oil cooled



Standards
NF C 96-315
MIL-DTL-39030



Impedance	50 $\Omega \pm 5\%$
Frequency	DC - 1 GHz (on request DC - 2.5 GHz)
Max VSWR	≤ 1.10 at 1 GHz
Temperature range	-25 to +55°C
Average power @ 25°C	2.5 kW
Cooling	Oil + forced air
Weight	21 kg

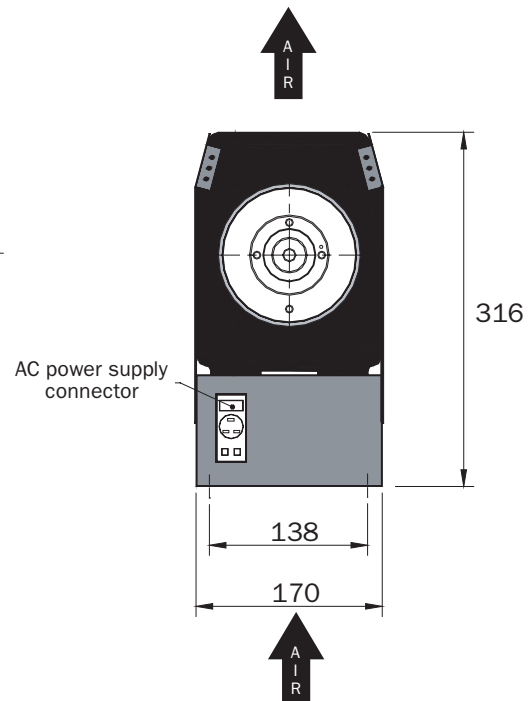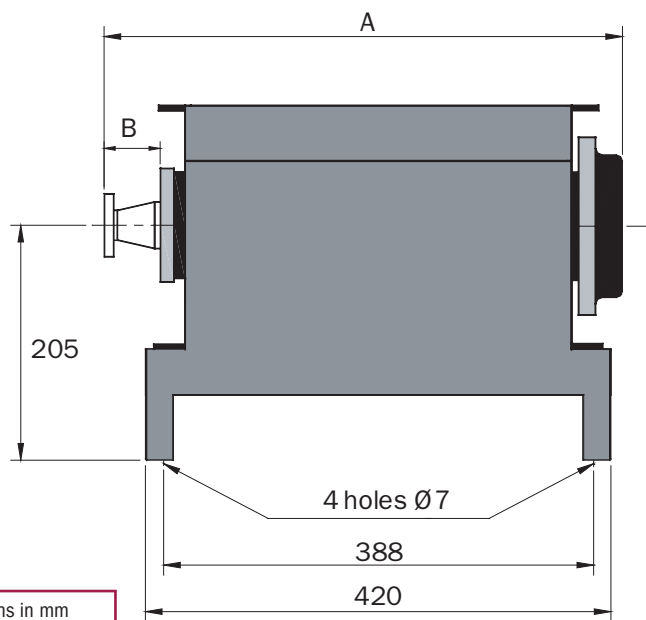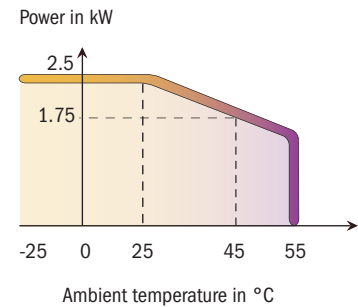

P/N	Connector	AC power supply	A	B
17-5231	EIA 7/8"	220 V - 50/60 Hz	482	55
17-0319*	EIA 7/8"	220 V - 50/60 Hz	482	55
17-5232	EIA 1.5/8"	220 V - 50/60 Hz	504	80
17-0299*	EIA 1.5/8"	220 V - 50/60 Hz	504	80

* Safety loop : Thermal + AC power supply

Option	VSWR ≤ 1.05 470 to 860 MHz for digital applications
--------	--

