

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	1	ORIGINAL RELEASE	9/28/09

Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housings in a cascade layout that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

Specifications:

- Frequency Range:

Gain:

Gain Flatness:

Noise Figure:

OP1dB:

VSWR Input/Output:

DC Voltage Supply:

DC Current Draw:
- 0.25 to 18.0 GHz

60dB Typ.

+/-1.75dB Max.

5.0dB Typ.

20dBm Min.

2.0:1 Max.

+12 to +15VDC

430mA Max.

Features:

- Internal Voltage Regulation

Unconditional Stability

Standard Operating Temperature -20 to +70 Deg. C

Available Options:

- Various Package types

Various Connector types

Temperature Compensation

Hermetic Sealing

Gain and Phase Matching

MIL-STD-883 Screening Available

Environmental Ratings:

- Temperature:

Humidity:

Shock:

Altitude:


Temperature Cycle:
- 20 to +70 Deg. C (Operating) ; -55 to +85 Deg C Available)

MIL-STD-202F, METHOD 103B COND B.

MIL-STD-202F, METHOD 213B COND B.

MIL-STD-202F, METHOD 105C COND B.

MIL-STD-202F, METHOD 107D COND A
- Note: The above specifications are subject to change or revision.

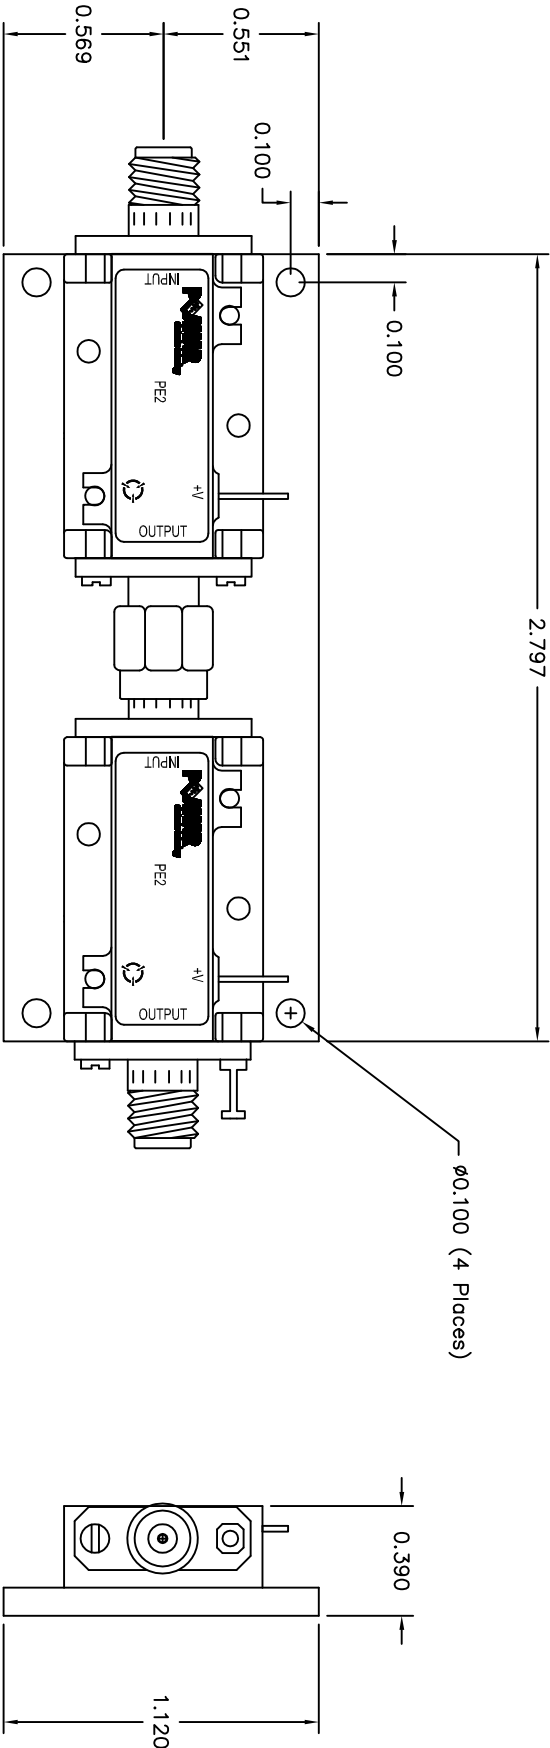

PART NO.		DATE		TITLE	
APPROVALS		9/28/09		PRODUCT FEATURE	
DRAWN K. Mason				PE2-60-0R2518R0-5R0-22-12-SFF-WEB	
CHECKED				SIZE B	
ISSUED				CAGE CODE 1LK53	
				DWG NO.	
				WEB	
				MODEL	
				REV.	
				A	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES

± .XX ± 0.010 ±

.XXX ± 0.005

MATERIAL:

6061-T6 Aluminum

FINISH:

Gold Plate over Nickel

DO NOT SCALE DRAWING

5715 Industry Lane, Unit 11

FREDERICK, MARYLAND