

REV		DESCRIPTION		DATE		APPROVED	
2	-	2/7/08	ORIGINAL RELEASE				

**Description:**

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

**Specifications:**

- Frequency Range: 0.25 to 2.0 GHz
- Gain: 30dB Typ.
- Gain Flatness: +/-0.5dB Max.
- Noise Figure: 5.0dB Typ.
- OP1dB: 20dBm Min.
- VSWR Input/Output: 2.0:1 Max.
- DC Voltage Supply: +12 to +15VDC
- DC Current Draw: 325mA Max.

**Features:**

- Internal Voltage Regulation
- Unconditional Stability
- Standard Operating Temperature -20 to +70 Deg. C

**Available Options:**


- Various Package types
- Various Connector types
- Temperature Compensation
- Hermetic Sealing
- Gain and Phase Matching
- MIL-STD-883 Screening Available

**Environmental Ratings:**


- Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C Available)
- Humidity: MIL-STD-202F, METHOD 103B COND B.
- Shock: MIL-STD-202F, METHOD 213B COND B.
- Altitude: MIL-STD-202F, METHOD 105C COND B.
- Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

**PE2 HOUSING WITH CARRIER**

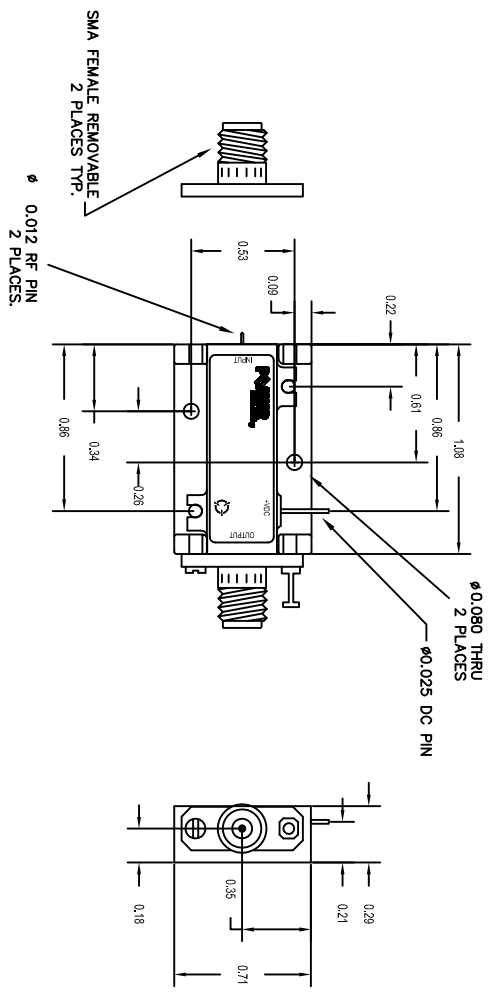

**PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)**

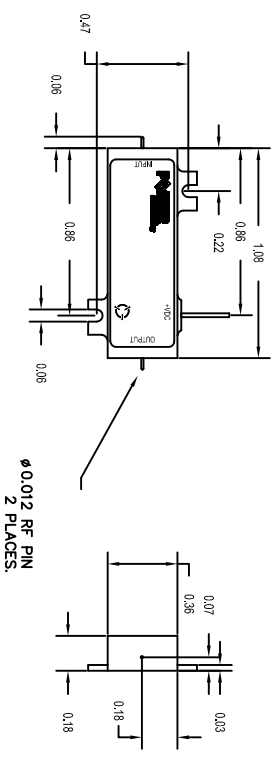

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XXX ± 0.010 ± .XXX ± 0.005 DO NOT SCALE DRAWING

MATERIAL:		6061-T6 Aluminum		FINISH:		Gold Plate over Nickel	
TOLERANCES ARE:		FRACTIONS		DECIMALS		ANGLES	
±		.XXX ± 0.010		±		.XXX ± 0.005	
PART NO.		APPROVALS		DATE		TITLE	
K. MASON		E/21/08				PRODUCT FEATURE	
MIL-STD-202F, METHOD 103B COND B.		MIL-STD-202F, METHOD 213B COND B.		MIL-STD-202F, METHOD 105C COND B.		MIL-STD-202F, METHOD 107D COND A	
5715 Industry Lane, Unit 11		FREDERICK, MARYLAND		PE2-30-0R252R0-5R0-22-12-SFF		B.1LK53	
WEB - MODEL		A		REV		1 OF 1	