




ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

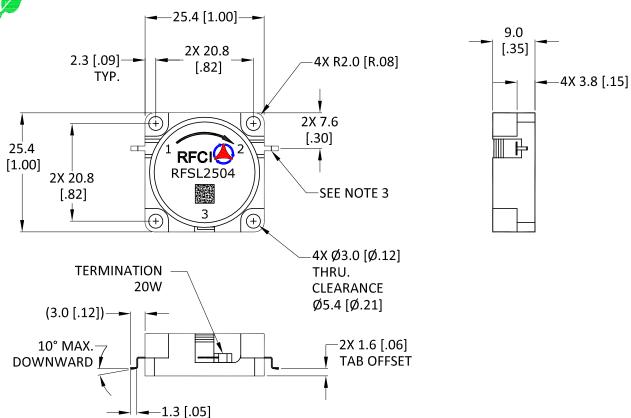

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1805		1880
Insertion Loss (dB)		< .20	.30
Isolation (dB)	22	> 25	
Return Loss (dB)	22	> 25	
FWD IMD: 2T at 37W per T		75	
5MHz Spacing (dBc)		-75	

Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	1000/200 Watts		
Reverse Power CW	20 Watts		
Termination Rating (See Note 2.)	20 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +85°C; 30 Min. maximum Duration.
- 3. Tab dims: .64[.025]Width x 3.0[.12]Length x .20[.008]Thick

CW 20W GW ISOLATOR MODEL: RFSL2504

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION						
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° SURFACE ROUGHNESS 16	APPROVALS	DATE					
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY: HV	04/16/13					
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI 946.1	CHECKED BY: P.T	04/17/13	TITLE				
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY: P.T	01/10/13	OUTLINE/SPECS				
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	ENGINEER BY: P.T	01/10/13		OUTLINE/OF LOO			
	MFG. ENGR. L.T	04/18/13	SIZE	SIZE CAGE NO. DWG NO.			BEV.
	Q.A.					E04 OC	1 1
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		A		SLZ	504-OS	_ ¹
DO NOT SCALE DRAWING			SCALE	: FULL		SHEET 1 OF	1
						•	