

# Precision Fixed Attenuator

BW-N7W5+

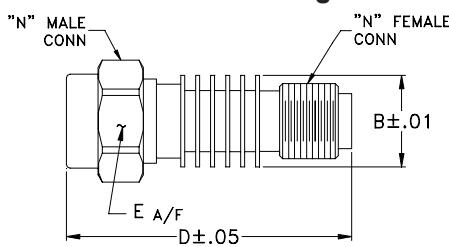
50Ω 5W 7dB DC to 18000 MHz

**Maximum Ratings**

Operating Temperature -55°C to 100°C  
 Storage Temperature -55°C to 100°C\*\*

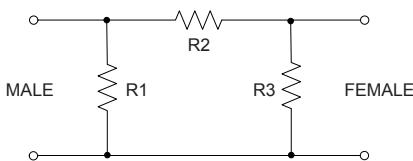
\*\*With mated connectors. Unmated, 85°C max.

Permanent damage may occur if any of these limits are exceeded.

**Outline Drawing****Outline Dimensions (inch/mm)**

B	D	E	wt
.61	1.90	.812	grams

15.49 48.26 20.62 49.7

**Electrical Schematic****Features**

- DC to 18000 MHz
- precise attenuation
- excellent VSWR, 1.20 typ
- stainless steel N male and female connectors



CASE STYLE: DC736

Connectors	Model
N-Female	BW-N7W5+

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

**Applications**

- matching
- instrumentation
- test set-ups

**Electrical Specifications**

FREQ. RANGE (MHz)	ATTENUATION <sup>1</sup> (dB)		VSWR <sup>2</sup> (:1)		MAX. INPUT POWER <sup>3</sup> (W)
	f <sub>L</sub> -f <sub>U</sub>	Nom.	DC-4 GHz	4-8 GHz	
DC-18000	7	-0.4, +0.9	1.20	1.25	1.30

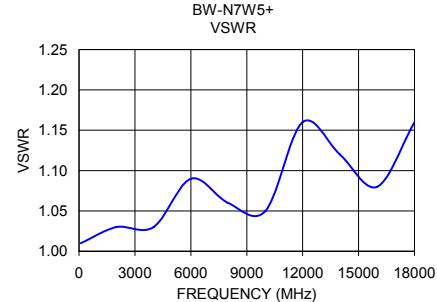
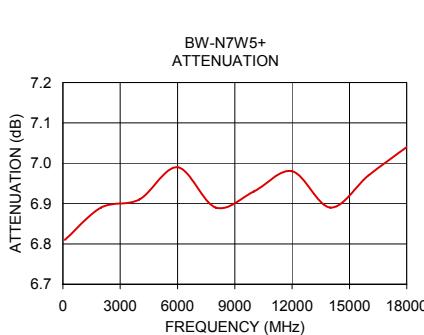
1. At 25°C, accuracy includes frequency and power variations. Temperature coefficient for attenuation: .0004dB/dB/°C typ.

2. VSWR from 12.4 to 18 GHz, 1.6:1 typ.

3. Average power at 25°C ambient, derate linearly to 2W at 100°C. Peak Power 125W max. 5μsec. pulse width, 100 Hz PRF.

**Typical Performance Data**

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
100	6.81	1.01
2000	6.89	1.03
4000	6.91	1.03
6000	6.99	1.09
8000	6.89	1.06
10000	6.93	1.05
12000	6.98	1.16
14000	6.89	1.12
16000	6.97	1.08
18000	7.04	1.16

**Notes**

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)