

**MECHANICAL**  
 CONTACT: BREAK BEFORE MAKE  
 ACTUATOR: MOMENTARY  
 SWITCHING SPEED: 20 mSEC MAX



**ELECTRICAL**  
 ACTUATOR VOLTAGE: 28.0 Vdc (22.0–32.0 Vdc)  
 ACTUATOR CURRENT: 0.150 A MAX @ 28.0 Vdc  
 POWER HANDLING: 200 WCW @ 1.0 GHz

**ENVIRONMENTAL**  
 OPERATING TEMP: -54°C to +90°C  
 SINE VIBRATION: 30 G'S rms  
 LIFE : 1,000,000 CYCLES  
 RANDOM VIBRATION: 20 G'S rms



**SPECIFICATION:**

FREQUENCY RANGE (GHz):	DC-2.0	2.0-4.0	4.0-8.0	8.0-12.4	12.4-18.0
VSWR (Max.):	1.20:1	1.25:1	1.30:1	1.40:1	1.50:1
INSERTION LOSS (dB):	0.20	0.25	0.30	0.40	0.50
ISOLATION (dB):	90	80	80	70	60
IMPEDANCE (Ohms):	50				

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

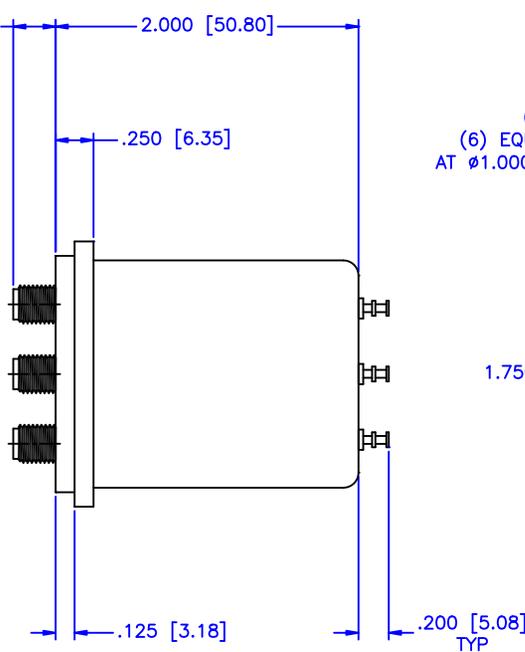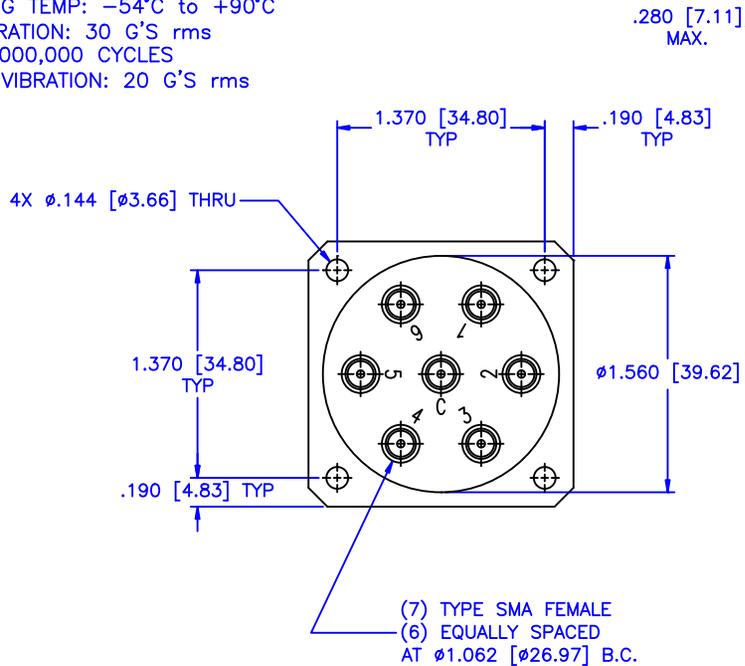

(7) TERMINALS  
 (6) EQUALLY SPACED  
 AT  $\phi$ 1.000 [ $\phi$ 25.4] B.C.

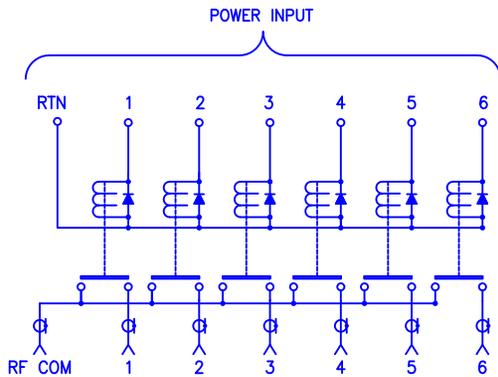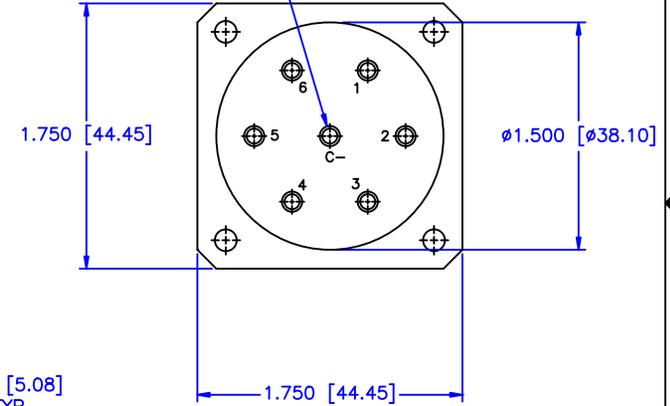

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm$ 1/64 DECIMALS: $\pm$ .01 $\pm$ .005 ANGLE: $\pm$ 1/2°			DRAWING TITLE: ELECTROMECHANICAL SWITCHES		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 03-28-2001		PART NO. A6-7-MS	
APPROVED: T. Nguyen		DATE: 03-28-2001		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO. 82268
		PERMANENT MARKING: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	