




Model: PS-J000-3S

Description:..... 3-Way Power Divider
Operating Frequency:..... 0.35 – 2 GHz
Insertion Loss: 0.5 dB Max
Isolation: 21 dB Min
VSWR: Σ Port..... 1.35:1 Max
..... Outputs 1.25:1 Max
Amplitude Balance:..... ± 0.1 dB Max
Phase Balance:..... $\pm 2^\circ$ Max
Power Handling (@ SUM Port): Load VSWR= ∞ 2W AVG/CW Max
..... Load VSWR <2:1..... 20W AVG/CW Max
Connectors: SMA (f)
Impedance: 50 Ohms Nominal
Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: MIL-STD-202F, Method 103B Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline
(A = 6.350" [161.3mm])

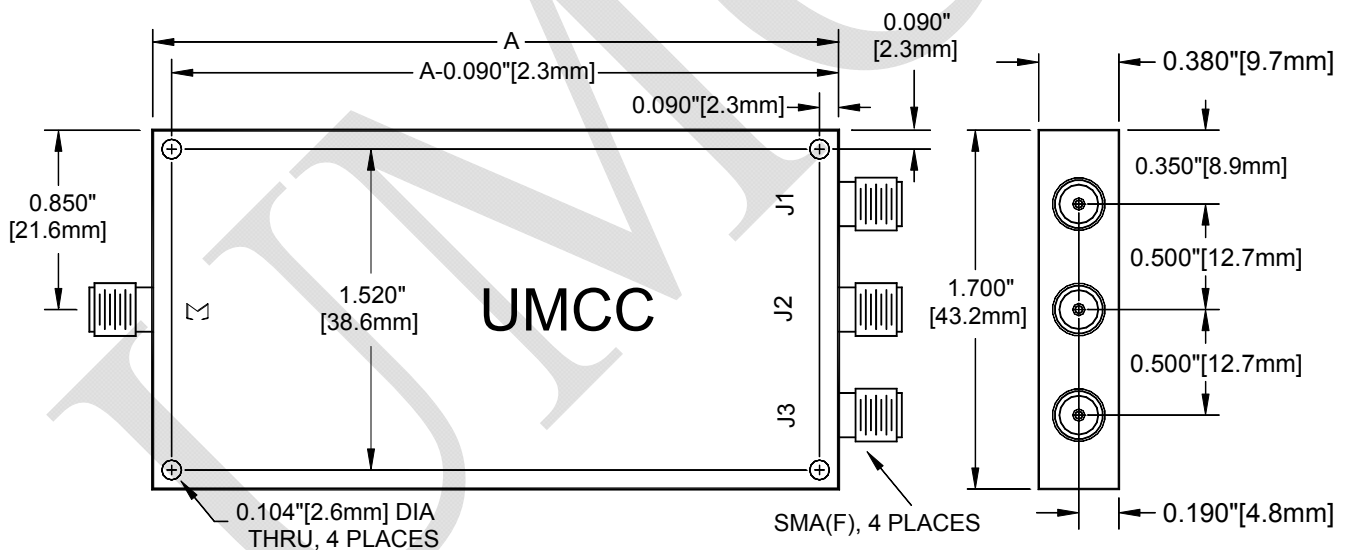

Weight

4.05 oz [114.8 g]